MALABAR

Maxwell Underground Mine
Environmental Monitoring Data
Quarter 3 2024

1 INTRODUCTION

This report has been compiled to present environmental monitoring data for the Maxwell Underground Mine (the project) in accordance with:

- Schedule 2, Condition E17 (a) (vii) of SSD-9526; and
- Condition 5 of EPBC 2018/8287. Specifically this requires the inclusion of hydrographs for all monitoring bores and an explanation of what the data means in relation to the groundwater performance measures specified in the State development consent (SSD 9526).

This report covers the reporting period 1 July to 30 September 2024. Summaries of historic environmental monitoring data (prior to this report) can be found on the Malabar Resources website.

2 MONITORING RESULTS

Deposited dust monitoring results are provided in **Table 1**.

Continuous TEOM PM_{10} monitoring results are provided in **Figure 1**.

Continuous TEOM $PM_{2.5}$ monitoring results are provided in **Figure 1**.

Mine storage surface water quality monitoring results are provided in **Table 2**.

Downstream surface water quality monitoring results are provided in **Table 3**.

Surface water quality field measurements from Saddlers Creek are compared to trigger levels in **Table 4**.

Surface water quality laboratory results from Saddlers Creek are compared to trigger levels in **Table 5**.

Groundwater quality results for Maxwell Infrastructure bores are provided in **Table 6**.

Groundwater quality monthly field measurements for Maxwell Infrastructure bore DS1 are provided in **Table 7**.

Groundwater quality results for Maxwell Underground bores are provided in **Table 8**.

Groundwater level results are provided in **Table 9**.

Locations of monitoring sites are shown in **Appendix 1** to **Appendix 3**.

The consultant hydrogeologist report providing the requirements of Condition 5 of EPBC 2018/8287, inclusive of hydrographs for all monitoring bores, and an explanation of the data relative to the groundwater performance measures in SSD 9526, is provided in **Appendix 4**.

Noise and blast monitoring results are not presented in this report as they are contained within the monthly reports required by the Environment Protection Licence and can be downloaded from the Malabar Resources website.

Table 1. Deposited dust monitoring results for reporting period Quarter 3 2024

Gauge	Insoluble Solids Result (g/m^2/month)			Annual Mean Limit (g/m^2/month)	Rolling Annual Average to end of reporting period (g/m^2/month)
	Jul	Aug	Sep		
2175	0.9	1.0	1.2	4	1.3
2230	1.0	1.3	1.2	4	1.5
2235	1.0	1.2	1.3	4	1.4
2247	1.0	1.1	1.2	4	1.4

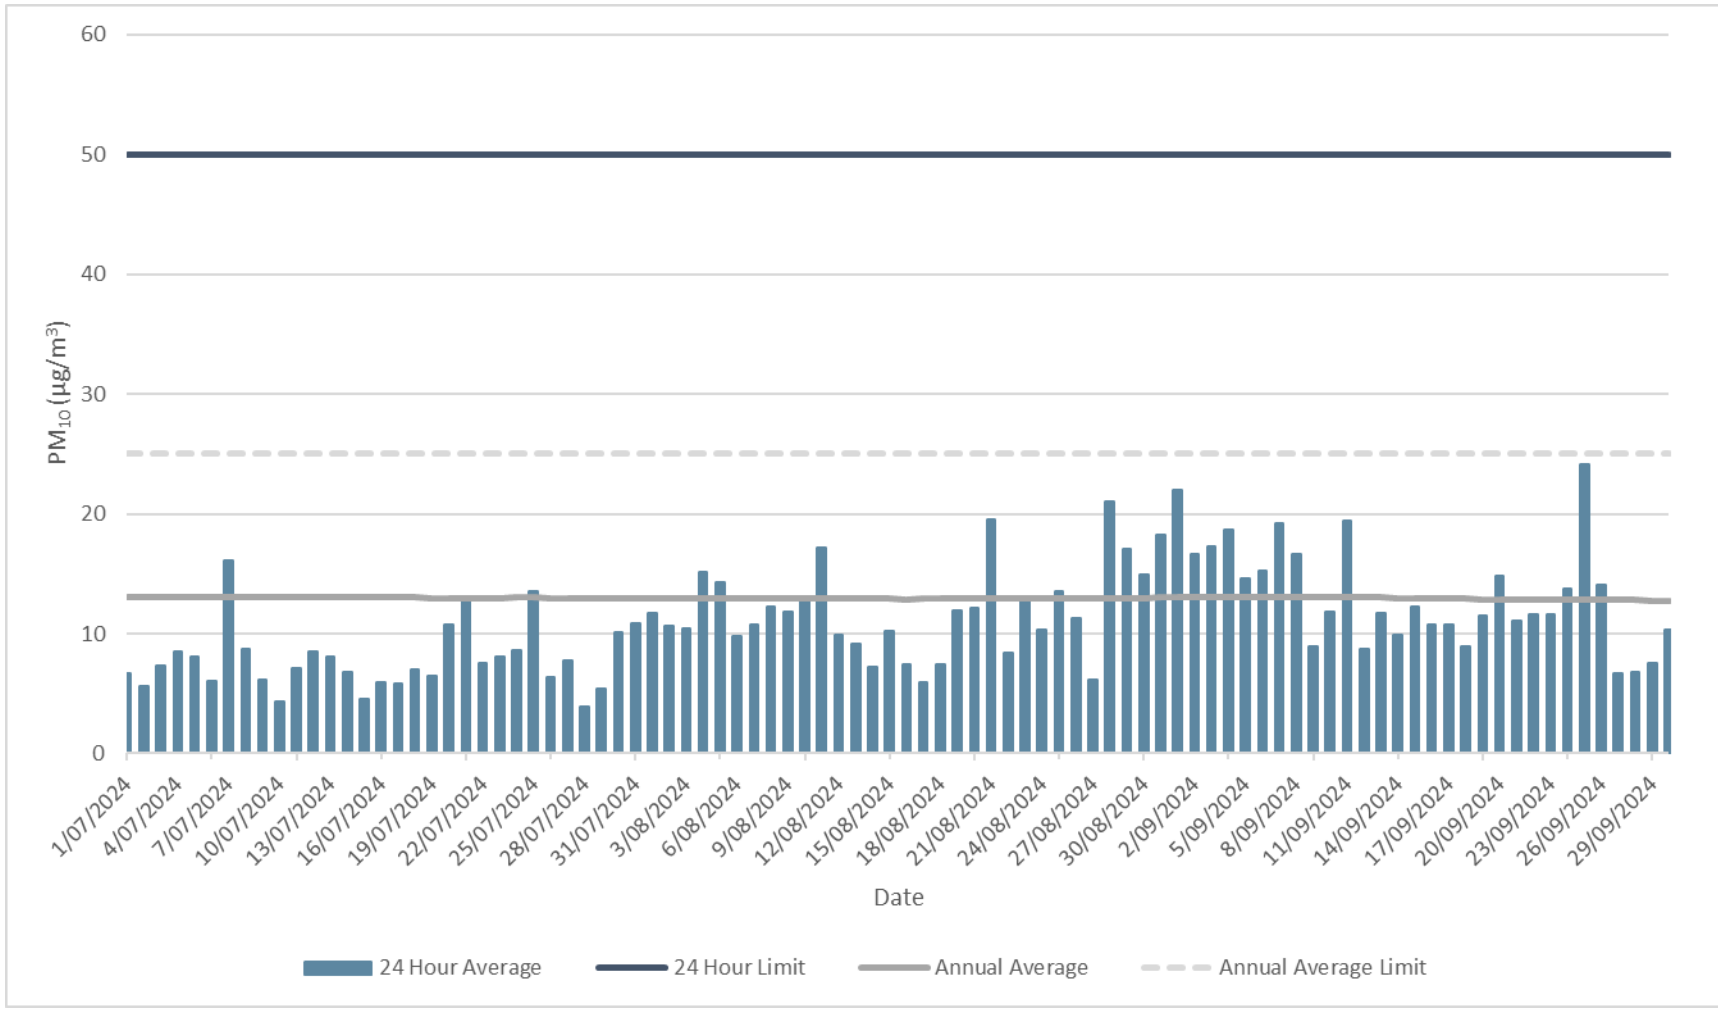

Figure 1. TEOM-1 PM_{10} monitoring results for the reporting period. Refer to notes for explanation of data gaps if shown by orange bars.

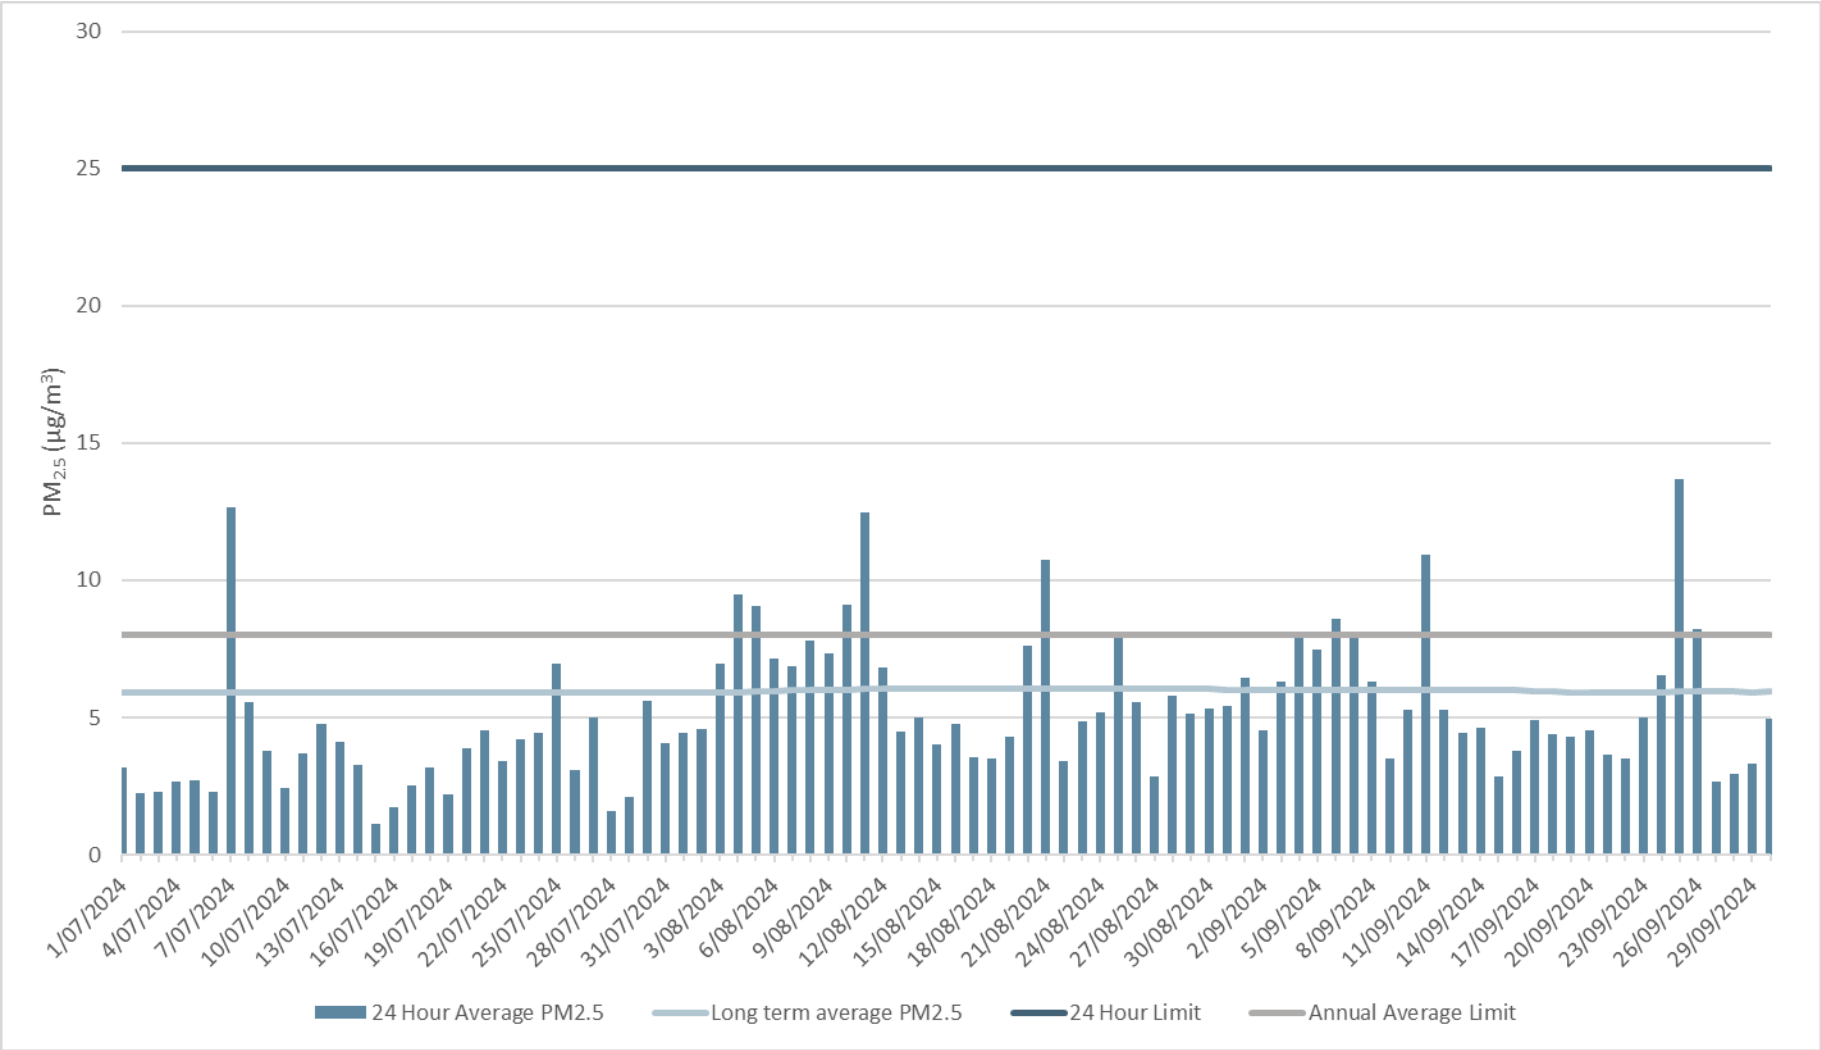

Figure 2. TEOM-1 $PM_{2.5}$ monitoring results for the reporting period. Refer to notes for explanation of data gaps if shown by orange bars.

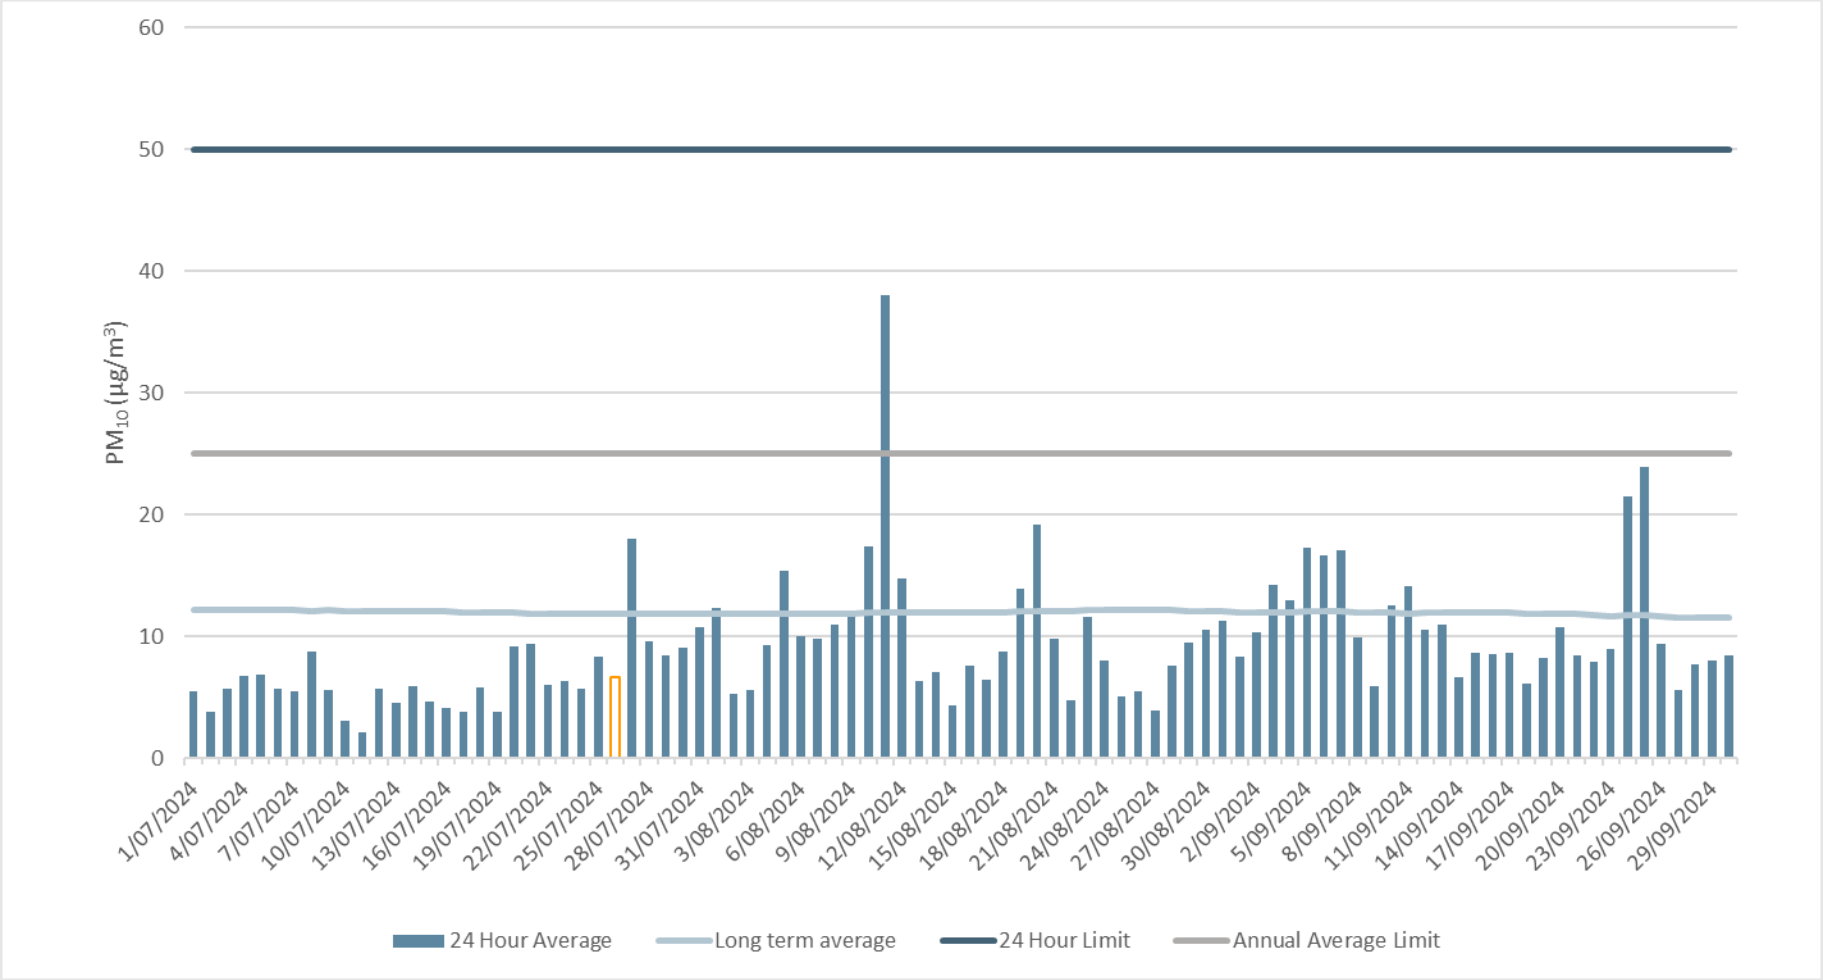

Figure 3. TEOM-2 PM_{10} monitoring results for the reporting period. Refer to notes for explanation of data gaps if shown by orange bars.

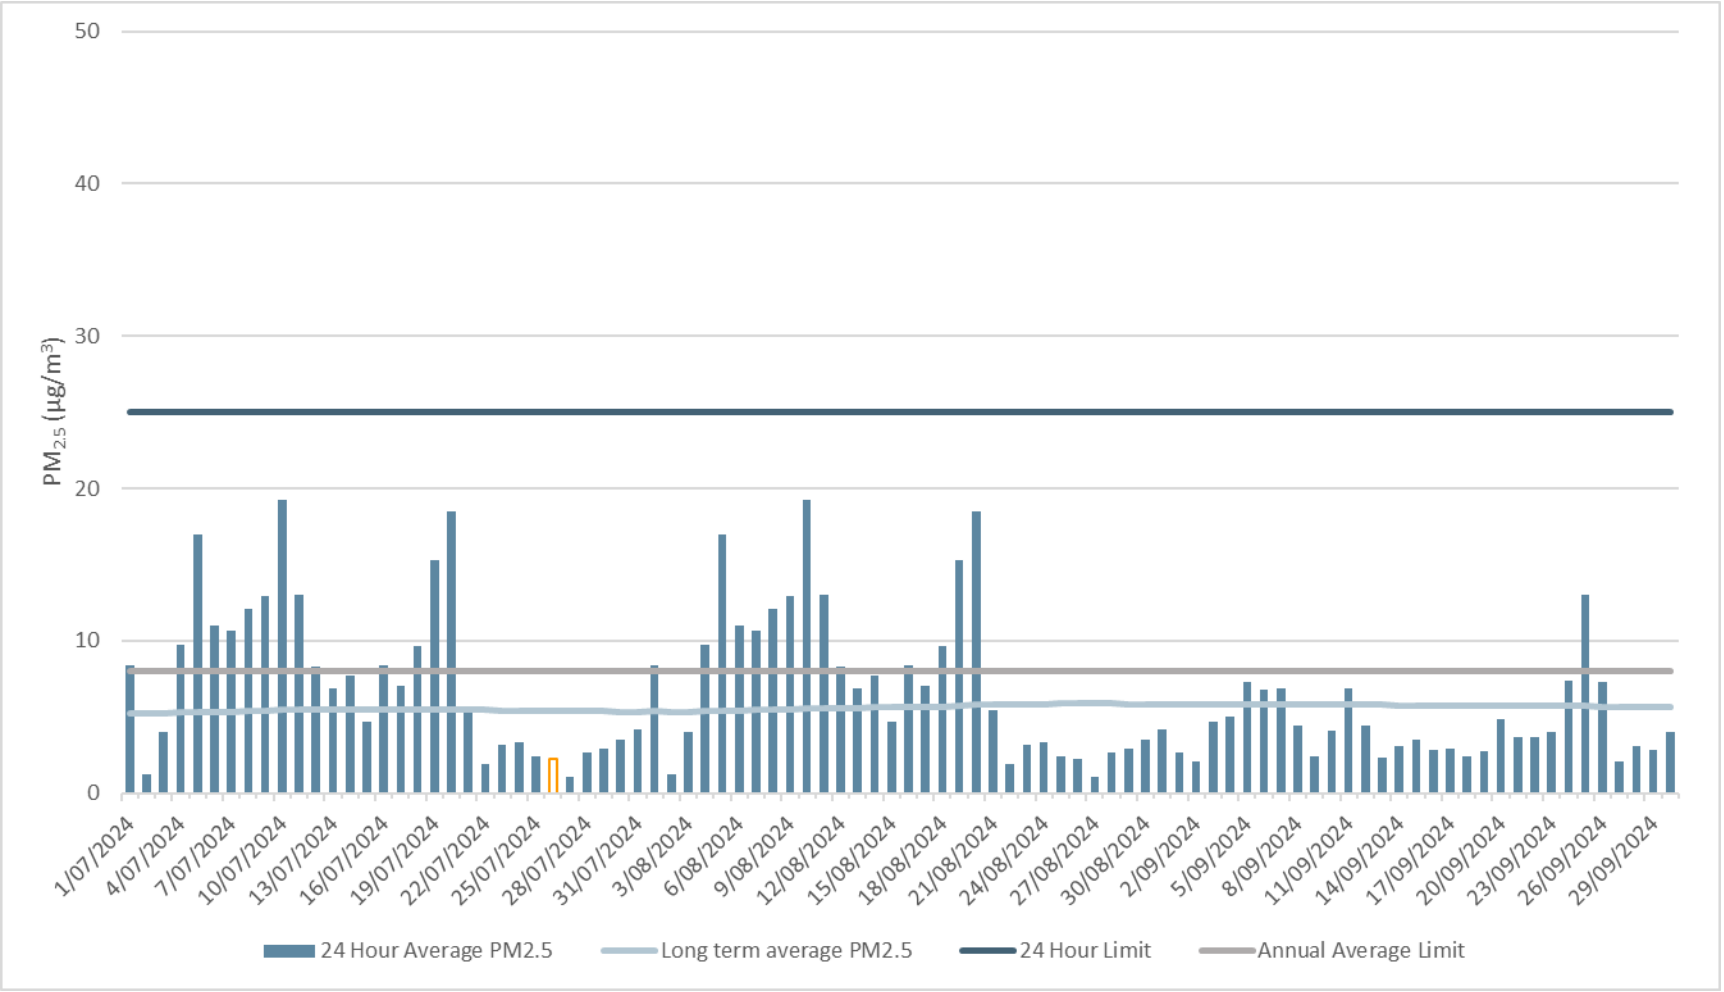

Figure 4. TEOM-2 $PM_{2.5}$ monitoring results for the reporting period. Refer to notes for explanation of data gaps if shown by orange bars.

Notes:

- Monitoring of PM_{10} and $PM_{2.5}$ commenced at TEOM-2 on 12 December 2021.
- All 24-hour averages during the reporting period were below the 24-hour criteria for both PM_{10} and $PM_{2.5}$ at both TEOM-1 and TEOM-2. The results of the investigations into any exceedances of the criteria (if required) are provided in the Annual Review.
- Gaps in data are due to maintenance and scheduled calibration by monitoring contractor, plus occasionally issues such as power cuts and equipment failure. Note that values close to zero may appear as gaps in data in the graphs.
- Where there is no TEOM-generated rolling 24-hour average value reported by the TEOM, in accordance with the monitoring contractor's data validation process, where such events result in 75% or less of valid 1-hour data during that 24-hour period (midnight to midnight), the 1-hour data is used to calculate the 24-hour average. This process has been applied from Q1 2022. Prior to this the raw data from the TEOM is presented, ie if no valid 24-hour value is generated by the TEOM, no data is presented for that day.
- Specific significant data gaps for the reporting period are noted as follows:

  TEOM-1

  When required, for TEOM-1, extended data gaps for PM_{10} are replaced with data from the BHP TEOM (DC07) on Balmoral Road, 2km to the northwest. Noting that $PM_{2.5}$ is not recorded at DC07 and where data is replaced, the long-term ratio of PM_{10} to $PM_{2.5}$ as recorded at TEOM-1 is applied to PM_{10} concentrations at DC07.

- There were no significant data gaps for the reporting period.

  TEOM-2

  When required, for TEOM-2, extended data gaps for PM_{10} are replaced with data from the Upper Hunter Air Quality Monitoring Network station named Jerrys Plains, which is located 2km to the south-east of TEOM-2. Noting that $PM_{2.5}$ is not recorded at the Jerrys Plains station, and where data is replaced, the long-term ratio of PM_{10} to $PM_{2.5}$ at TEOM-2 is applied to PM_{10} concentrations at Jerrys Plains.

- 26 July 2024: A scheduled replacement of the TEOM at this location by the monitoring contractor resulted in less than 75% data capture during the 24-hour period which is below the threshold for calculating a valid 24-hour average. Hence replacement data was obtained from the nearby Jerrys Plains station, as described above.

Table 2. All mine water storage monitoring locations: quarterly laboratory water quality monitoring results for the reporting period compared to year-to-date averages. See notes for further details.

Site	Month	Bicarbonate ($CaCO_3$) (mg/L)	Calcium (mg/L)	Chloride (mg/L)	EC (µS/cm)	Magnesium (mg/L)	pH	Potassium (mg/L)	Sodium (mg/L)	Sulphate (SO_4) (mg/L)	TSS (mg/L)	TDS (mg/L)
Access Rd Dam (2081)	Sep	151	529	857	7840	626	7.7	83	723	3560	5.0	7080
	Avg	**143**	**525**	**843**	**7613**	**591**	**8.3**	**80**	**689**	**3695**	**8.5**	**7145**
DC2 Dam (2109)	Sep	206	187	1170	8150	333	7.2	12	1290	3160	8.0	6440
	Avg	**263**	**220**	**1716**	**9651**	**443**	**7.5**	**14**	**1729**	**3321**	**11**	**8479**
Rail Loop Dam (2114)	Sep	216	394	714	6350	417	7.8	48	592	3100	7.0	5590
	Avg	**165**	**348**	**614**	**5436**	**380**	**7.5**	**44**	**523**	**2522**	**20**	**4912**
Industrial Dam (1969)	Sep	171	374	590	5500	383	8.3	54	449	2800	7.0	5000
	Avg	**157**	**380**	**591**	**5583**	**400**	**8.3**	**55**	**476**	**2540**	**9.3**	**4878**
OPC Dam	Sep	231	195	333	3230	186	8.4	25	250	1200	34	2420
	Avg	**136**	**159**	**276**	**2630**	**157**	**8.4**	**20**	**213**	**995**	**25**	**2072**
V Notch	Sep	336	482	1170	8900	436	8.0	18	1330	3910	5.0	7370
	Avg	**334**	**454**	**1246**	**9300**	**451**	**7.8**	**28**	**1442**	**3610**	**5.2**	**8018**
ES Void	Sep	263	560	764	7230	546	8.2	79	594	3860	7.0	6940
	Avg	**239**	**581**	**816**	**7678**	**603**	**8.0**	**83**	**653**	**3820**	**7.3**	**7318**
MEA Dam (MEA)	Jul	68	115	420	2770	104	8.3	8.0	332	772	5.0	1830
	Avg*	**78**	**111**	**376**	**2715**	**94**	**8.7**	**10**	**321**	**824**	**5.0**	**1765**
Mine Water Dam (MWD)	Jul	268	164	754	4860	189	8.4	25	722	1440	8.0	3440
	Avg	**226**	**190**	**687**	**4865**	**226**	**8.3**	**30**	**610**	**1474**	**11**	**3770**
Treated Water Dam (TWD)	Jul	66	521	845	7700	635	8.7	78	657	4020	5.0	7490
	Avg	**107**	**518**	**862**	**8035**	**621**	**8.5**	**83**	**681**	**4053**	**5.0**	**8025**

Site	Month	Bicarbonate ($CaCO_3$) (mg/L)	Calcium (mg/L)	Chloride (mg/L)	EC (µS/cm)	Magnesium (mg/L)	pH	Potassium (mg/L)	Sodium (mg/L)	Sulphate (SO_4) (mg/L)	TSS (mg/L)	TDS (mg/L)
MEA Sedimentation Dam (SED)	Jul	342	203	886	5750	213	8.5	27	826	1580	5.0	4140
	Avg	**229**	**189**	**678**	**4834**	**207**	**8.3**	**27**	**635**	**1481**	**18.4**	**3353**

Notes:

The year-to-date value consists of an average of the quarterly sample for the current quarter plus the three previous quarters, as per the Water Management Plan. The exceptions are for the V Notch dam, where samples are taken monthly as is required by the EPL.

The MEA Dam, Mine Water Dam, Treated Water Dam and MEA Sedimentation Dam were progressively constructed and commissioned during 2023. Samples were taken when water was available and safe access permitted.

Whilst the requirement is for sampling within 24 hours of commencement of an overflow from a sedimentation dam (SW2 – see Table 5 below) or mine water dam, sampling has also occurred from each water body on a quarterly basis, to aid the understanding of water quality outside of overflow events.

Locations are as per Table 7 of the Surface Water Management Plan dated 13/12/2023.

Table 3. All downstream surface water quality monitoring locations: scheduled (quarterly) laboratory monitoring results for the reporting period compared to rolling year-to-date averages (inclusive of any post rainfall sampling). See notes for further details. Where creeks were not flowing during scheduled sampling no results are presented in this Table. In most cases, no creeks were flowing during sampling in the rolling year to date, hence the rolling annual average is not presented for this table. If there is no flow during the sampling visit the rolling average is not presented.

Site	Month	Antimony	Arsenic	Bicarbonate ($CaCO_3$)	Calcium	Chloride	EC	Magnesium	Molybdenum	Potassium	Selenium	Sodium	Sulphate (SO_4)	TSS	TDS	Turbidity
Saddlers U/S	Jul*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	Avg*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
W3	Jul *	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	Avg*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SW1/ Saddlers U/S	Jul *	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	Avg*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Saddlers D/S (W4-Bowfield)	Jul *	0.0010	0.0010	611	86	1600	6330	200	0.0010	8.0	0.010	1040	284	14	3680	6.0
	Avg*	**0.0010**	**0.0010**	**650**	**64**	**1886**	**6893**	**200**	**0.0013**	**10**	**0.010**	**1173**	**220**	**13**	**4009**	**20**
MEA D/S	Jul *	0.0010	0.0010	34	8.0	14	154	4.0	0.0010	9.0	0.010	11	15	6.0	223	65
	Avg*	**0.0010**	**0.0010**	**47**	**13**	**56**	**339**	**7.5**	**0.0010**	**13**	**0.010**	**43**	**26**	**34**	**303**	**78**
Saltwater D/S	Jul *	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	Avg*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SW3	Jul *	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	Avg*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

***Notes**

In addition to quarterly scheduled sampling, the Maxwell Underground Mine Water Management Plan requires sampling and analysis following 25mm or more of rain over a 24-hour period (defined as midnight to midnight and defined as recorded at the Drayton South meteorological recording station (AWS-2)). The results from any such post-rainfall events have been included in the year-to-date averages. The 2024 Q2 report

presented results from post-rainfall event sampling in June (the next scheduled sampling was in July, as presented in Table 3 above). The absence of any value indicates that there was no flow during the sampling visit.

The quarterly field measurements of pH, EC, redox potential and temperature are recorded to enable subsequent evaluation in case of need and are not included in the quarterly reporting.

The Transport and Services Corridor sediment dams (Access Road Dam 1, 2, 3 and 4) were progressively constructed and commissioned during 2023. The requirement for the sampling and analysis for these variables is required within 24 hours of commencement of an overflow from a sedimentation dam or mine water dam (taken to be defined as an uncontrolled release from those dams). During the reporting period there were no overflows from such dams and hence there are no results in Table 3.

All results are in mg/L except Conductivity (µS/cm), pH (in pH units) and turbidity (nephelometric turbidity units).

The following will be reported in the Annual Review:

- Comparison of water quality results from Saddlers Creek against Water Quality Trigger Values
- Results from the automatic weather stations (AWS-1 and AWS-2)
- Results of the stream health monitoring.

Following an investigation into the high EC readings at site Saddlers Upstream (U/S) in Q3 2023 it was found that due to a change in sampling personnel, the requirement (Section 5.3 of the Water Management Plan) to only sample waterways that are flowing was not occurring (ie samples were of stagnant (ie non-flowing) water). This was reflective of the regional drought conditions. It was determined that all samples taken in 2023 were of stagnant water; and hence should not be used for comparison against trigger values and hence are not presented in this report. Going forward, samples are only taken if water is flowing.

Locations are as per Table 9 of the Surface Water Management Plan dated 13/12/2023.

Table 4. Surface water scheduled field measurements at sites along Saddlers Creek for Q4 2023 to Q3 2023 and comparison against trigger levels. If an exceedance of the trigger level occurs (median over three consecutive samples), this is highlighted in red. TLTS = too low to sample. No sites were flowing during scheduled or post-rainfall sampling during prior three quarters and hence there are no results presented in the Table for those periods.

Site		Field result											
		pH				EC				Turbidity			
	Units	pH				µS/cm				NTU			
	Trigger	6.5–8.5				7,600				64			
		Q4 2023	Q1 2024	Q2 2024	Q3 2024	Q4 2023	Q1 2024	Q2 2024	Q3 2024	Q4 2023	Q1 2024	Q2 2024	Q3 2024
W3*		*	*	*	*	*	*	*	*	*	*	*	*
Saddlers D/S (W4 – Bowfield)*		*	*	8.1	8.2	*	*	1350	6220	*	*	103	6.4
MEA D/S*		*	*	*	7.6	*	*	*	1497	*	*	*	59.1
Saddlers U/S*		*	*	7.5	*	*	*	1349	*	*	*	74	*
Saltwater D/S*		*	*	*	*	*	*	*	*	*	*	*	*
SW1/ Saddlers*		*	*	7.6	*	*	*	466	*	*	*	213	*
SW2*		*	*	*	*	*	*	*	*	*	*	*	*
SW3*		*	*	*	*	*	*	*	*	*	*	*	*

* As is explained in the Notes to Table 3, surface water samples are not taken in stagnant water (where there is no flow).

Table 5. Surface water laboratory results at sites along Saddlers Creek (scheduled quarterly and post-rainfall sampling) from Q4 2023 to Q3 2024 and comparison against trigger levels. If an exceedance of the trigger level occurs (median over three consecutive samples), this is highlighted in red. Refer also to Notes at end of Table 5. The absence of data indicates that the site was not flowing and hence no sample was taken.

Site	Scheduled or post-rainfall sample date	Sampling type	Laboratory result													
			Sb	As (V)	As (III)	CaCO3	Ca	Cl	Mg	Mb	K	Se	Na	SO4	TSS	TDS
Units			mg/L	mg/L mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	µg/L	µg/L	µg/L	µg/L	µg/L
Trigger			9[c]	13[c]	24 [b] [c]	[a]	[a]	[a]	[a]	34[c]	[a]	11[c]	[a]	[a]	50	4900
W3	18/10/23	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	21/12/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	06/04/24	Rainfall event*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	19/04/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	03/06/24	Rainfall event*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	24/07/2024	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Saddlers D/S	19/10/23	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	21/12/23	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	06/04/24	Rainfall Event*	0.0010	0.0010	0.0010	650	59	1960	218	0.0010	11	0.01	1370	163	14.0	4180
	19/04/24	Scheduled*	0.0010	0.0010	0.0010	779	78	2220	223	0.0020	12	0.01	1370	218	5.0	4690
	03/06/24	Rainfall event*	0.0010	0.0010	0.0010	148	21	375	36.0	0.0010	8.0	0.010	198	71	36	843
	24/07/2024	Scheduled*	0.0010	0.0010	0.0010	611	86	1600	200	0.0010	8.0	0.010	1040	284	14	3680

Site	Scheduled or post-rainfall sample date	Sampling type	Laboratory result													
			Sb	As (V)	As (III)	CaCO3	Ca	Cl	Mg	Mb	K	Se	Na	SO4	TSS	TDS
Units			mg/L	mg/L mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	µg/L	µg/L	µg/L	µg/L	µg/L
Trigger			9[c]	13[c]	24 [b] [c]	[a]	[a]	[a]	[a]	34[c]	[a]	11[c]	[a]	[a]	50	4900
MEA D/S	20/10/23	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	15/1/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	06/04/24	Rainfall event*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	18/04/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	03/06/24	Rainfall event*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	23/07/2024	Scheduled*	0.0010	0.0010	0.0010	34	8.0	14	4.0	0.0010	9.0	0.010	11	15	6.0	223
Saddlers U/S	18/10/23	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	12/1/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	06/04/24	Rainfall event*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	19/04/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	03/06/24	Rainfall event*	0.0010	0.0010	0.0010	81	50	254	46.0	0.0010	8.0	0.010	148	328	36	902
	23/07/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

Site	Scheduled or post-rainfall sample date	Sampling type	Laboratory result													
			Sb	As (V)	As (III)	CaCO3	Ca	Cl	Mg	Mb	K	Se	Na	SO4	TSS	TDS
Units			mg/L	mg/L mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	µg/L	µg/L	µg/L	µg/L	µg/L
Trigger			9[c]	13[c]	24 [b] [c]	[a]	[a]	[a]	[a]	34[c]	[a]	11[c]	[a]	[a]	50	4900
Saltwater D/S	18/10/23	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	10/1/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	19/04/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	03/06/24	Rainfall event*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	25/07/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SW1/ Saddlers D/S	19/10/23	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	11/1/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	06/04/24	Rainfall event*	0.0010	0.0010	0.0010	21	10	105	10	0.0010	8	0.01	55	10	41	334
	19/04/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	03/06/24	Rainfall event*	0.0010	0.0010	0.0010	51	10	130	9.0	0.0010	9.0	0.010	63	10	50	446
	24/07/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SW2**	3/06/24	Rainfall event*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	23/07/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

Site	Scheduled or post-rainfall sample date	Sampling type	Laboratory result													
			Sb	As (V)	As (III)	CaCO3	Ca	Cl	Mg	Mb	K	Se	Na	SO4	TSS	TDS
Units			mg/L	mg/L mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	µg/L	µg/L	µg/L	µg/L	µg/L
Trigger			9[(c)]	13[(c)]	24 [(b)] [(c)]	[(a)]	[(a)]	[(a)]	[(a)]	34[(c)]	[(a)]	11[(c)]	[(a)]	[(a)]	50	4900
SW3	18/10/23	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	11/1/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	06/04/24	Rainfall event*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	19/04/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	03/06/24	Rainfall event*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	25/07/24	Scheduled*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
H3***	-	-	*	*	*	*	*	*	*	*	*	*	*	*	*	*

Notes.
(a) No trigger; for interpretation purposes only. (b) Result is a combination of As (V) and As (III) (c) Trigger set as a preliminary guideline value.
In accordance with the Surface Water Management Plan, results from Saddlers Creek (median over three consecutive samples) will be compared to the relevant trigger levels. Trigger values are values that trigger further investigation or management action.

* As is explained in the Notes to Table 3, all surface water samples taken in 2023 were of stagnant water and there were no samples taken during the reporting period due to no flow. Hence there are no results in Table 3 for 2023. Going forward, samples will only be taken in creeks when they are flowing; hence the absence of results in this Table are due to no flow/stagnant water/dry sampling location.
** Transport and Services Corridor sediment dams – Permanent Sediment Basin 2 – SW2. Sampling commenced 3/6/24 (a post-rainfall event however no flow at SW2). This site is judged to be the only one of the four Transport and Services Corridor sediment dams with a potential to release water offsite downstream to the Plashett reservoir.
*** As per the updated Surface Water Management Plan submitted for approval with the Woodlands Hill Extraction Plan, Maxwell will resume surface water sampling at H3 (in 2025).

Table 6. Maxwell Infrastructure Groundwater quality biennial monitoring results for Quarter 3 2024 (rolling year to date average shown Oct 23 – Sept 24). See notes for further details. NS = Not sampled - (as sampling is twice a year, next is due Q4 2024). EC and pH recording from field measurements where available.

Site	Aluminium	Arsenic	Bicarbonate Alkalinity as CaCO3	Total Alkalinity	Carbonate Alkalinity as CO3	Boron	Calcium	Chloride	Chromium	Copper	Electrical conductivity	EC trigger value	Iron	Lead
R4241	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	5,240	6,253	NS	NS
Average	***0.010***	***0.0010***	***562***	***562***	***1.0***	***0.27***	***231***	***1,011***	***0.0010***	***0.0010***	***5,385***	***-***	***0.96***	***0.0010***
F1162	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	2,722	-	NS	NS
Average	***0.010***	**0.0010**	**1,003**	***1,003***	***1.0***	**0.23**	**123**	**375**	**0.0020**	**0.0010**	**2,810**	***-***	***0.060***	***0.0010***
F1164	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	4,280	-	NS	NS
Average	***0.065***	**0.0010**	**734**	***734***	**1.0**	**0.26**	**197**	**962**	**0.0020**	**0.0010**	**5,158**	***-***	***4.7***	**0.0085**
GW01D	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	5,870	5,680	NS	NS
Average	***0.010***	***0.0010***	***594***	***594***	***1.0***	***0.38***	***462***	***1,395***	***0.0010***	***0.0010***	***5,803***	***-***	***0.61***	***0.0010***
GW01S	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	9,260	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
GW02D	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	13,900	10,500	NS	NS
Average	***0.020***	***0.0010***	***2,055***	***2,055***	***1.0***	***0.31***	***70***	***1,835***	***0.0010***	***0.0035***	***13,625***	***-***	***0.13***	***0.0010***
GW02S	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	7,780	9,480	NS	NS
Average	***0.010***	***0.0010***	***871***	***871***	***1.0***	***0.18***	***428***	***1,040***	***0.0010***	***0.0010***	***7,728***	***-***	***2.4***	***0.0010***
GW04	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	1,802	-	NS	NS
Average	***1.2***	***0.0010***	***835***	***835***	***1.0***	***0.85***	***141***	***182***	***0.0050***	***0.0045***	***1,875***	***-***	***4.7***	***0.0045***

Table 6 continued

Site	Magnesium	Manganese	Molybdenum	Nickel	pH value	pH trigger value	Selenium	Silver	Sodium	Sulfate as SO4 – Turbidimetric	Suspended Solids (SS)	Total Dissolved Solids @180°C	Zinc
R4241	NS	NS	NS	NS	6.9	Min: 6.0, Max: 8.5	NS	NS	NS	NS	NS	NS	NS
Average	***350***	***0.12***	***0.0040***	***0.0060***	***7.0***	***-***	***0.010***	***0.0010***	***599***	***1,295***	***39***	***4,075***	***0.0060***
F1162	NS	NS	NS	NS	7.0	-	NS	NS	NS	NS	NS	NS	NS
Average	***120***	***0.20***	***0.0040***	***0.010***	***7.0***	***-***	***0.010***	***0.0010***	***353***	***130***	***71***	***1,370***	***0.0050***
F1164	NS	NS	NS	NS	6.8	-	NS	NS	NS	NS	NS	NS	NS
Average	***249***	***0.33***	***0.0025***	***0.0060***	***6.9***	***-***	***0.010***	***0.0010***	***732***	***1,058***	***60***	***3,760***	***0.017***
GW01D	NS	NS	NS	NS	6.5	Min: 6.0, Max: 8.5	NS	NS	NS	NS	NS	NS	NS
Average	***194***	***0.23***	***0.0010***	***0.029***	***6.6***	***-***	***0.010***	***0.0010***	***607***	***762***	***12***	***4,255***	***0.028***
GW01S	NS	NS	NS	NS	NS	Min: 6.0, Max: 8.5	NS	NS	NS	NS	NS	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
GW02D	NS	NS	NS	NS	6.9	Min: 6.0, Max: 8.5	NS	NS	NS	NS	NS	NS	NS
Average	***20***	***0.55***	***0.0050***	***0.28***	***7.1***	***-***	***0.010***	***0.0010***	***3,670***	***3,760***	***2,185***	***11,150***	***0.013***
GW02S	NS	NS	NS	NS	6.6	Min: 6.0, Max: 8.5	NS	NS	NS	NS	NS	NS	NS
Average	***445***	***1.9***	***0.0010***	***0.020***	***6.7***	***-***	***0.010***	***0.0010***	***1,075***	***2,770***	***935***	***6,380***	***0.033***
GW04	NS	NS	NS	NS	6.5	-	NS	NS	NS	NS	NS	NS	NS
Average	***69***	***0.30***	***0.0010***	***0.0045***	***6.6***	***-***	***0.010***	***0.0010***	***193***	***60***	***379***	***1,040***	***0.052***

Table 7. DS1 monitoring bore: Laboratory groundwater quality monthly monitoring results for Quarter 3 2024 (rolling year to date average shown Oct 23 – Sept 24). See notes for further details. NS = Not sampled NA = Laboratory results not available at time of reporting (to be updated and included in Q4-2024 reporting). Field measurements used where available.

Date of sample	pH value	Electrical conductivity	Total Dissolved Solids @180°C	Salinity (g/kg)
08/07/2024	NA	NA	NA	NA
09/08/2024	NA	NA	NA	NA
13/09/2024	6.0	8,310	NA	NA
Average	***6.25***	***8,473***	***7,367***	***4.7***

Table 8. Maxwell Underground groundwater quality biennial monitoring results for Quarter 2 2024 (rolling year to date average shown Jul 23–Jun 24). See notes for further details. If applicable, NS = not sampled (as sampling is twice a year, next is due Q3 2024).

Site	Aluminium	Arsenic	Bicarbonate Alkalinity as CaCO3	Total Alkalinity	Carbonate Alkalinity as CO3	Boron	Calcium	Chloride	Chromium	Copper	Electrical conductivity	EC trigger value	Iron	Lead
DD1005	0.010	0.0010	1,030	1,030	1.0	0.20	151	1,800	0.0010	0.0070	7,380	-	0.050	0.0010
Average	***0.010***	***0.0010***	***1,010***	***1,010***	***1.0***	***0.20***	***134***	***1,785***	***0.0010***	***0.0070***	***7,004***	***-***	***0.050***	***0.0010***
DD1014	0.010	0.0010	987	987	1.0	0.36	75	2,420	0.0010	0.0080	9,340	-	0.060	0.0010
Average	***0.010***	***0.0010***	***1,024***	***1,024***	***1.0***	***0.38***	***65***	***2,370***	***0.0010***	***0.0045***	***9,206***	***-***	***0.15***	***0.0010***
DD1015	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	-	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
DD1016	0.010	0.0010	1,170	1,170	1.0	0.26	185	1,520	0.0010	0.0010	6,610	-	1.8	0.0010
Average	***0.010***	***0.0010***	***1,155***	***1,155***	***1.0***	***0.26***	***167***	***1,540***	***0.0010***	***0.0010***	***6,316***	***-***	***1.7***	***0.0010***
DD1025	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	14,200	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
DD1027	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	-	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
DD1032	0.010	0.0010	1,020	1,020	1.0	0.27	16	1,530	0.0010	0.0010	6,600	7,170	0.050	0.0010
Average	***0.010***	***0.0010***	***1,060***	***1,060***	***1.0***	***0.27***	***14***	***1,525***	***0.0010***	***0.0010***	***6,338***	***-***	***0.050***	***0.0010***
DD1043	0.010	0.0010	2,240	2,240	1.0	0.44	45	1,370	0.0010	0.0010	7,980	-	0.11	0.0010
Average	***0.010***	***0.0010***	***2,315***	***2,315***	***1.0***	***0.44***	***46***	***1,370***	***0.0010***	***0.0010***	***7,842***	***-***	***0.095***	***0.0010***
DD1052	0.040	0.0020	949	982	33	0.26	7.0	1,980	0.0040	0.0020	7,580	-	0.10	0.0010
Average	***0.030***	***0.0015***	***944***	***961***	***17***	***0.27***	***5.0***	***1,915***	***0.0050***	***0.0020***	***7,352***	***-***	***0.12***	***0.0010***

Site	Aluminium	Arsenic	Bicarbonate Alkalinity as CaCO3	Total Alkalinity	Carbonate Alkalinity as CO3	Boron	Calcium	Chloride	Chromium	Copper	Electrical conductivity	EC trigger value	Iron	Lead
DD1057	0.010	0.0030	3,610	3,610	1.0	0.38	12	1,440	0.0030	0.0010	10,100	-	1.2	0.0010
Average	***0.010***	***0.0025***	***3,725***	***3,725***	***1.0***	***0.37***	***11***	***1,400***	***0.0030***	***0.0010***	***9,986***	***-***	***1.2***	***0.0010***
MB03	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	-	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
MB1A	0.010	0.0010	759	759	1.0	0.10	258	1,220	0.0020	0.018	5,240	-	0.050	0.0010
Average	***0.010***	***0.0010***	***756***	***756***	***1.0***	***0.10***	***223***	***1,180***	***0.0015***	***0.016***	***4,852***	***-***	***0.050***	***0.0010***
MB1R	0.010	0.0010	1,300	1,300	1.0	0.17	71	1,260	0.0010	0.0010	6,370	-	0.47	0.0010
Average	***0.010***	***0.0010***	***1,285***	***1,285***	***1.0***	***0.17***	***66***	***1,250***	***0.0010***	***0.0010***	***6,084***	***-***	***0.26***	***0.0010***
MB1W	0.010	0.0010	1,320	1,320	1.0	0.18	67	1,220	0.0010	0.0010	6,260	-	0.29	0.0010
Average	***0.010***	***0.0010***	***1,300***	***1,300***	***1.0***	***0.18***	***62***	***1,220***	***0.0010***	***0.0015***	***6,040***	***-***	***0.17***	***0.0010***
MB2A	0.010	0.0010	725	725	1.0	0.29	90	1,710	0.0010	0.0030	7,200	-	0.050	0.0010
Average	***0.010***	***0.0010***	***767***	***767***	***1.0***	***0.29***	***87***	***1,655***	***0.0010***	***0.0020***	***6,900***	***-***	***0.050***	***0.0010***
MB2R	0.010	0.0010	1,100	1,100	1.0	0.30	36	1,440	0.0010	0.0010	6,300	-	0.050	0.0010
Average	***0.010***	***0.0010***	***1,140***	***1,140***	***1.0***	***0.28***	***34***	***1,435***	***0.0010***	***0.0010***	***6,354***	***-***	***0.050***	***0.0010***
MB3A	0.010	0.0010	799	799	1.0	0.29	50	2,030	0.0010	0.0080	8,440	9,009	0.050	0.0010
Average	***0.010***	***0.0010***	***828***	***828***	***1.0***	***0.29***	***48***	***2,005***	***0.0010***	***0.0080***	***8,172***	***-***	***0.050***	***0.0010***
MB3R	0.010	0.0010	691	691	1.0	0.22	182	1,480	0.0010	1.9	6,400	6,327	0.050	0.0030
Average	***0.010***	***0.0010***	***725***	***725***	***1.0***	***0.20***	***165***	***1,450***	***0.0010***	***1.8***	***6,268***	***-***	***0.050***	***0.0020***
MB4A	0.010	0.0010	337	337	1.0	0.050	68	121	0.0010	0.0040	952	-	0.050	0.0010

Site	Aluminium	Arsenic	Bicarbonate Alkalinity as CaCO3	Total Alkalinity	Carbonate Alkalinity as CO3	Boron	Calcium	Chloride	Chromium	Copper	Electrical conductivity	EC trigger value	Iron	Lead
Average	***0.010***	***0.0010***	***322***	***322***	***1.0***	***0.050***	***65***	***106***	***0.0010***	***0.0025***	***932***	***-***	***0.050***	***0.0010***
MB4C	0.010	0.0010	518	518	1.0	0.13	19	499	0.0010	0.0010	2,540	-	0.050	0.0010
Average	***0.010***	***0.0010***	***556***	***556***	***1.0***	***0.13***	***17***	***485***	***0.0010***	***0.0010***	***2,470***	***-***	***0.050***	***0.0010***
MW1	0.010	0.0010	636	636	1.0	0.24	133	1,520	0.0020	0.046	6,490	-	0.050	0.0010
Average	***0.010***	***0.0010***	***681***	***681***	***1.0***	***0.24***	***116***	***1,515***	***0.0020***	***0.040***	***6,092***	***-***	***0.050***	***0.0010***
MW2	0.010	0.0010	796	796	1.0	0.26	69	1,700	0.0010	0.0040	6,660	-	0.050	0.0010
Average	***0.010***	***0.0010***	***838***	***838***	***1.0***	***0.25***	***67***	***1,660***	***0.0015***	***0.0065***	***6,546***	***-***	***0.050***	***0.0010***
MW3	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	-	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
MB04	0.010	0.0010	1,310	1,310	1.0	0.22	183	2,920	0.0010	0.0030	11,100	-	0.050	0.0010
Average	***0.010***	***0.0010***	***1,360***	***1,360***	***1.0***	***0.22***	***169***	***2,850***	***0.0010***	***0.0015***	***10,800***	***-***	***0.050***	***0.0010***
MB05	0.010	0.0010	628	628	1.0	0.18	103	1,520	0.0010	0.0020	6,080	-	0.050	0.0010
Average	***0.010***	***0.0010***	***673***	***673***	***1.0***	***0.18***	***92***	***1,495***	***0.0010***	***0.0015***	***5,974***	***-***	***0.050***	***0.0010***
MB06D	0.010	0.0030	3,740	3,740	1.0	0.30	18	724	0.0010	0.0010	8,160	-	0.050	0.0010
Average	***0.010***	***0.0035***	***3,920***	***3,920***	***1.0***	***0.28***	***17***	***721***	***0.0010***	***0.0010***	***8,130***	***-***	***0.050***	***0.0010***
MB06S	0.010	0.028	2,060	2,060	1.0	0.29	24	567	0.0010	0.0010	5,280	-	0.60	0.0010
Average	***0.010***	***0.030***	***2,120***	***2,120***	***1.0***	***0.28***	***23***	***562***	***0.0010***	***0.0010***	***5,228***	***-***	***0.44***	***0.0010***
MB07	0.010	0.0010	447	447	1.0	0.23	135	1,230	0.0010	0.0060	5,120	-	0.050	0.0010
Average	***0.010***	***0.0010***	***584***	***584***	***1.0***	***0.23***	***132***	***1,535***	***0.0010***	***0.0035***	***6,903***	***-***	***0.050***	***0.0010***

Table 8. continued

Site	Magnesium	Manganese	Molybdenum	Nickel	pH value	pH trigger value	Selenium	Silver	Sodium	Sulfate as SO4 - Turbidimetric	Suspended Solids (SS)	Total Dissolved Solids @180°C	Zinc
DD1005	239	0.011	0.0050	0.012	7.1	-	0.010	0.0010	1,200	227	27	4,010	0.0050
Average	***226***	***0.013***	***0.0045***	***0.012***	***7.1***	***-***	***0.010***	***0.0010***	***1,190***	***217***	***23***	***4,180***	***0.0050***
DD1014	36	0.030	0.0010	0.0020	7.4	-	0.010	0.0010	1,980	232	5.0	5,680	0.0050
Average	***36***	***0.031***	***0.0010***	***0.0020***	***7.3***	***-***	***0.010***	***0.0010***	***1,985***	***220***	***5.0***	***5,660***	***0.0050***
DD1015	NS	NS	NS	NS	NS	-	NS	NS	NS	NS	NS	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
DD1016	240	0.16	0.0010	0.0010	7.1	-	0.010	0.0010	828	94	10	3,730	0.0050
Average	***273***	***0.16***	***0.0010***	***0.0010***	***6.9***	***-***	***0.010***	***0.0010***	***824***	***93***	***13***	***3,965***	***0.0070***
DD1025	NS	NS	NS	NS	NS	Min: 6.0, Max: 8.5	NS	NS	NS	NS	NS	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
DD1027	NS	NS	NS	NS	NS	-	NS	NS	NS	NS	NS	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
DD1032	6.0	0.021	0.0010	0.0010	7.5	Min: 6.0, Max: 8.5	0.010	0.0010	1,440	57	6.0	3,700	0.0050
Average	***5.0***	***0.022***	***0.0010***	***0.0010***	***7.4***	***-***	***0.010***	***0.0010***	***1,460***	***60***	***22***	***3,770***	***0.0050***
DD1043	26	0.021	0.0010	0.0010	7.0	-	0.010	0.0010	1,760	156	5.0	4,980	0.0050
Average	***27***	***0.023***	***0.0010***	***0.0010***	***6.9***	***-***	***0.010***	***0.0010***	***1.805***	***149***	***5.0***	***5,025***	***0.0050***

Table 8. continued

Site	Magnesium	Manganese	Molybdenum	Nickel	pH value	pH trigger value	Selenium	Silver	Sodium	Sulfate as SO4 - Turbidimetric	Suspended Solids (SS)	Total Dissolved Solids @180°C	Zinc
DD1052	4.0	0.054	0.022	0.021	8.1	-	0.010	0.0010	1,640	88	16	4,120	0.0090
Average	***3.5***	***0.036***	***0.023***	***0.016***	***8.0***	***-***	***0.010***	***0.0010***	***1,620***	***90***	***12***	***4,415***	***0.0075***
DD1057	5.0	0.040	0.0080	0.0020	7.6	-	0.010	0.0010	2,490	1.0	5.0	6,500	0.0050
Average	***5.5***	***0.030***	***0.0080***	***0.0020***	***7.6***	***-***	***0.010***	***0.0010***	***2,525***	***5.5***	***5.0***	***6,600***	***0.0050***
MB03	NS	NS	NS	NS	NS	-	NS	NS	NS	NS	NS	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
MB1A	231	0.0020	0.0020	0.017	7.7	-	0.010	0.0010	666	151	391	3,000	0.049
Average	***204***	***0.0025***	***0.0020***	***0.017***	***7.4***	***-***	***0.010***	***0.0010***	***634***	***137***	***289***	***2,930***	***0.032***
MB1R	58	0.017	0.0010	0.0010	7.2	-	0.010	0.0010	1,250	92	5.0	3,450	0.0050
Average	***58***	***0.017***	***0.0010***	***0.0010***	***7.2***	***-***	***0.010***	***0.0010***	***1,250***	***92***	***5.0***	***3,450***	***0.0050***
MB1W	65	0.042	0.0010	0.0020	7.3	-	0.010	0.0010	1,290	84	17	3,560	0.0050
Average	***61***	***0.041***	***0.0010***	***0.0020***	***7.2***	***-***	***0.010***	***0.0010***	***1,265***	***85***	***19***	***3,550***	***0.0050***
MB2A	198	0.084	0.0040	0.0010	7.5	-	0.010	0.0010	1,200	493	5.0	4,170	0.0050
Average	***196***	***0.39***	***0.0040***	***0.0020***	***7.5***	***-***	***0.010***	***0.0010***	***1,215***	***492***	***13***	***4,105***	***0.0050***
MB2R	51	0.0020	0.0010	0.0010	7.9	-	0.010	0.0010	1,290	3.0	8.0	3,550	0.0050
Average	***52***	***0.0040***	***0.0010***	***0.0010***	***7.8***	***-***	***0.010***	***0.0010***	***1,315***	***2.0***	***18***	***3,610***	***0.0050***

Table 8. continued

Site	Magnesium	Manganese	Molybdenum	Nickel	pH value	pH trigger value	Selenium	Silver	Sodium	Sulfate as SO4 - Turbidimetric	Suspended Solids (SS)	Total Dissolved Solids @180°C	Zinc
MB3A	228	0.0010	0.0030	0.0010	7.5	Min: 6.0, Max: 8.5	0.010	0.0010	1,500	545	14	4,980	0.0050
Average	***233***	***0.0015***	***0.0030***	***0.0015***	***7.5***	***-***	***0.010***	***0.0010***	***1,520***	***592***	***9.5***	***4,890***	***0.0050***
MB3R	332	0.26	0.0020	0.058	7.6	Min: 6.0, Max: 8.5	0.010	0.0010	762	597	5.0	4,040	0.025
Average	***330***	***0.27***	***0.0015***	***0.069***	***7.6***	***-***	***0.010***	***0.0010***	***774***	***587***	***5.0***	***4,060***	***0.027***
MB4A	46	0.0010	0.0010	0.0010	7.2	-	0.010	0.0010	73	30	173	508	0.0050
Average	***45***	***0.0015***	***0.0010***	***0.0010***	***7.2***	***-***	***0.010***	***0.0010***	***72***	***31***	***187***	***534***	***0.0050***
MB4C	32	0.0010	0.0020	0.0010	8.1	-	0.010	0.0010	518	17	5.0	1,410	0.0050
Average	***30***	***0.0010***	***0.0020***	***0.0010***	***8.1***	***-***	***0.010***	***0.0010***	***515***	***17***	***5.0***	***1,410***	***0.0050***
MW1	384	0.0010	0.0010	0.0010	7.4	-	0.010	0.0010	844	709	687	4,280	0.0050
Average	***375***	***0.0010***	***0.0010***	***0.0015***	***7.4***	***-***	***0.010***	***0.0010***	***849***	***716***	***6,644***	***4,340***	***0.0050***
MW2	145	0.087	0.0020	0.0020	7.5	-	0.010	0.0010	1,180	136	985	3,840	0.0050
Average	***145***	***0.046***	***0.0015***	***0.0020***	***7.4***	***-***	***0.010***	***0.0010***	***1,195***	***137***	***1,423***	***3,830***	***0.0050***
MW3	NS	NS	NS	NS	NS	-	NS	NS	NS	NS	NS	NS	NS
Average	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***	***-***
MB04	375	0.14	0.0010	0.018	7.0	-	0.010	0.0010	1,750	393	21	6,700	0.0060
Average	***384***	***0.19***	***0.0010***	***0.011***	***6.9***	***-***	***0.010***	***0.0010***	***1,800***	***401***	***56***	***6,515***	***0.0070***

Table 8. continued

Site	Magnesium	Manganese	Molybdenum	Nickel	pH value	pH trigger value	Selenium	Silver	Sodium	Sulfate as SO4 - Turbidimetric	Suspended Solids (SS)	Total Dissolved Solids @180°C	Zinc
MB05	155	0.0040	0.0010	0.0040	7.5	-	0.010	0.0010	973	268	2,310	3,560	0.0050
Average	***157***	***0.0015***	***0.0015***	***0.0025***	***7.4***	***-***	***0.010***	***0.0010***	***1,002***	***260***	***10,955***	***3,635***	***0.0050***
MB06D	21	0.0060	0.014	0.0050	7.9	-	0.010	0.0010	2,140	83	10	5,380	0.0050
Average	***21***	***0.0035***	***0.015***	***0.0050***	***7.8***	***-***	***0.010***	***0.0010***	***2,190***	***88***	***7.5***	***5,195***	***0.0050***
MB06S	24	0.036	0.010	0.0030	7.8	-	0.010	0.0010	1,250	138	14	3,360	0.0050
Average	***26***	***0.050***	***0.0090***	***0.0050***	***7.7***	***-***	***0.010***	***0.0010***	***1,290***	***144***	***36***	***3,385***	***0.0050***
MB07	306	0.010	0.0010	0.0010	7.3	-	0.010	0.0010	909	453	216	3,110	0.0050
Average	***329***	***0.014***	***0.0010***	***0.0010***	***7.2***	***-***	***0.010***	***0.0010***	***990***	***568***	***295***	***3,970***	***0.0050***

Notes

The Maxwell Underground Mine Water Management Plan (WMP) requires:

- the monthly recording of reduced standing water levels in all bores (standpipes either manually or using loggers and VWPs)
- quarterly recording (field measurement) of all standpipes for pH, EC, redox potential and temperature; and
- biennial sampling and analysis of all standpipes for TDS, TSS, major cations (Ca, Mg, Na), major anions (chloride, sulfate, carbonate, bicarbonate), total alkalinity, and total and dissolved metals (Al, As, B, Cr, Cu, Fe, Mn, Mo, Ni, Pb, Se, Ag & Zn).

The year-to-date averages includes samples taken on a biennial basis. The exception is for DS1 for which monthly samples are taken as per the EPL for pH, EC, TDS and salinity, and hence the average presented is the average of all samples taken during each of the past 12 months for those variables.

All results are in mg/L except Conductivity (µS/cm), pH (in pH units) and salinity (g/kg). Dissolved metal concentration (mg/L) are presented in **Table 6 and Table 8.** Plots of total and dissolved metal concentrations are shown in **Appendix 4**. Dissolved concentrations are the most applicable to groundwater quality evaluation and indications to change in trend and are presented here. EC and pH recordings are from field measurements, the remainder are from laboratory analysis.

See **Appendix 4** for an assessment against trigger levels.

Table 9. All groundwater bores: Reduced standing groundwater levels (mAHD) during Quarter 2 2024 compared to the rolling year-to-date average (Jul 23–Jun 24).

Site (with seam names for VWPs)	Jul	Aug	Sept	Rolling average	Type of bore	Type of measurement as of Sept 24
DS1	223.94	223.94	223.94	223.94	Standpipe	Manual
R4241	177.66	177.51	176.24	176.89	Standpipe	Logger
F1162	145.02	145.11	145.15	144.44	Standpipe	Logger
F1164	144.76	144.91	145.04	144.00	Standpipe	Logger
GW01D	200.66	201.54	202.58	200.32	Standpipe	Logger
GW01S	198.75	199.11	198.70	198.79	Standpipe	Logger
GW02D	135.41	135.42	135.48	135.69	Standpipe	Logger
GW02S	191.13	191.37	191.45	190.55	Standpipe	Logger
GW04	150.65	150.67	150.94	150.13	Standpipe	Logger
BLK6R12 – VW1 (WB)	161.76	(1)	(1)	161.94 (1)	VWP	Logger
BLK6R12 – VW2 (RB)	148.69	(1)	(1)	148.56 (1)	VWP	Logger
BLK6R12 – VW3 (WN)	122.21	(1)	(1)	122.31 (1)	VWP	Logger
BLK6R12 – VW4 (BK)	123.41	(1)	(1)	123.59 (1)	VWP	Logger
DD1005	141.46	(1)	(1)	143.06 (1)	Standpipe	Logger
DD1014	136.00	(1)	(1)	136.09 (1)	Standpipe	Logger
DD1015	(2)	(2)	(2)	(2)	Standpipe	Logger
DD1016	142.08	(1)	(1)	142.08 (1)	Standpipe	Logger
DD1025	(3)	(3)	(3)	(3)	Standpipe	Logger
DD1027	(4)	(4)	(4)	(4)	Standpipe	Logger
DD1032	128.32	(1)	(1)	128.27	Standpipe	Logger
DD1043	128.74	(1)	(1)	128.24	Standpipe	Logger
DD1052	118.28	(1)	(1)	119.63	Standpipe	Logger

Site (with seam names for VWPs)	Jul	Aug	Sept	Rolling average	Type of bore	Type of measurement as of Sept 24
DD1057	123.41	(1)	(1)	123.31 (1)	Standpipe	Logger
MB03	114.85 (5)	(1)	(1)	114.82 (1)	Standpipe	Logger
MB04	129.12	(1)	(1)	128.59 (1)	Standpipe	Logger
MB05	93.75	(1)	(1)	93.49 (1)	Standpipe	Logger
MB06D	121.53	(1)	(1)	121.46 (1)	Standpipe	Logger
MB06S	119.25	(1)	(1)	119.13 (1)	Standpipe	Logger
MB07	123.62	(1)	(1)	123.47 (1)	Standpipe	Logger
MB1-Alluvial	72.93	(1)	(1)	72.93 (1)	Standpipe	Logger
MB1-Redbank	75.35	(1)	(1)	75.20 (1)	Standpipe	Logger
MB1-Whybrow	74.55	(1)	(1)	74.55 (1)	Standpipe	Logger
MB2-Alluvial	113.54	(1)	(1)	113.49 (1)	Standpipe	Logger
MB2-Regolith	115.76	(1)	(1)	115.75 (1)	Standpipe	Logger
MB3-Alluvial	129.68	(1)	(1)	129.36 (1)	Standpipe	Logger
MB3-Regolith	129.18	(1)	(1)	128.90 (1)	Standpipe	Logger
MB4-Alluvial	70.76	(1)	(1)	70.53 (1)	Standpipe	Logger
MB4-Coal	70.65	(1)	(1)	70.43 (1)	Standpipe	Logger
MW1	129.42	(1)	(1)	129.15 (1)	Standpipe	Logger
MW2	112.60	(1)	(1)	112.53 (1)	Standpipe	Logger
MW3	(6)	(6)	(6)	(6)	Standpipe	Manual
RBD1 – VW1 (WB)	148.59	(1)	(1)	148.75 (1)	VWP	Logger
RBD1 – VW2 (RB)	144.96	(1)	(1)	145.15 (1)	VWP	Logger
RBD1 – VW3 (WN)	128.50	(1)	(1)	128.14 (1)	VWP	Logger
RBD1 – VW4 (BK)	88.52	(1)	(1)	88.78 (1)	VWP	Logger
RD1189 – VWP1 (WH)	(7)	(7)	(7)	(7)	VWP	Logger

Site (with seam names for VWPs)	Jul	Aug	Sept	Rolling average	Type of bore	Type of measurement as of Sept 24
RD1189 – VWP2 (AZZBF)	(7)	(7)	(7)	(7)	VWP	Logger
RD1189 – VWP3 (WW12)	(7)	(7)	(7)	(7)	VWP	Logger
RD1189 – VWP4 (Mt Arthur seam)	(7)	(7)	(7)	(7)	VWP	Logger
RD1189 – VWP5 (PF2)	(7)	(7)	(7)	(7)	VWP	Logger
RD1189 – VWP6 (BY)	(7)	(7)	(7)	(7)	VWP	Logger
RD1189 – VWP7 (WY)	(7)	(7)	(7)	(7)	VWP	Logger
RD1192- VWP1 (WB)	(7)	(7)	(7)	(7)	VWP	Logger
RD1192- VWP2 (RB)	(7)	(7)	(7)	(7)	VWP	Logger
RD1192-VWP3 (BK)	(7)	(7)	(7)	(7)	VWP	Logger
MB1VWP (VWP1) (INT)	(8)	(8)	(8)	75.35 (8)	VWP	Logger
MB1VWP (VWP2) (INT)	(8)	(8)	(8)	86.74 (8)	VWP	Logger
MB1VWP (VWP3) (INT)	(8)	(8)	(8)	95.31 (8)	VWP	Logger
MB1VWP (VWP4) (WB)	(8)	(8)	(8)	96.27 (8)	VWP	Logger
MB1VWP (VWP5) (WN)	(8)	(8)	(8)	99.80 (8)	VWP	Logger
WND16 (VWP1) (WB)	111.63	(1)	(1)	112.48 (1)	VWP	Logger
WND16 (VWP2) (WN)	(9)	(9)	(9)	(9)	VWP	Logger

Site (with seam names for VWPs)	Jul	Aug	Sept	Rolling average	Type of bore	Type of measurement as of Sept 24
WND16 (VWP3) (BK)	(8)	(8)	(8)	(8)	VWP	Logger
WND16 (VWP4) (BK)	109.99	(1)	(1)	109.60 (1)	VWP	Logger
WND26 (VWP1) (WY)	136.66	(1)	(1)	136.74 (1)	VWP	Logger
WND26 (VWP2) (RB)	134.49	(1)	(1)	134.41 (1)	VWP	Logger
WND26 (VWP3) (WB)	140.80	(1)	(1)	141.02 (1)	VWP	Logger
WND26 (VWP4) (WN)	(8)	(8)	(8)	(8)	VWP	Logger

Notes

1. Measurements for Q3-2024 taken during July 2024. All remaining data to be downloaded as part of Q4-2024.
2. DD1015 is reported blocked during the reporting period; DD1027 is deemed to bring no significant value to future groundwater assessments as it monitors the Edderton Seam which is not targeted by the Maxwell UG Mine. As per the recommendations in the 2022 Annual Review, these monitoring locations will be removed from the reporting, once the next version of the Management Plan is approved.
3. DD1025 was decommissioned in December 2022 for safety reasons (to prevent inrush to the upcoming underground mining operations). As per the recommendations in the 2022 and 2023 Annual Reviews, it is proposed that this site will be replaced by a replacement bore] for the purposes of the TARP assessment in Appendix A, once a revised GWMP has been approved.
4. Bore not accessible for safety reasons.
5. Bore reported as dry during monitoring period from manual measurements. Readings most likely reflects stagnant water level in bore and not true water level.
6. MW3 are recorded dry during the reporting period. As per the recommendations in the 2022 and 2023 Annual Reviews, it is proposed that MW3 will be removed from the reporting, once the next version of the Management Plan is approved.
7. Groundwater levels at RD1189 VWP2, VWP7 & VWP8 appear unstable hence are not reported. As per the recommendations in the 2022 Annual Review, these monitoring datasets will be removed from the reporting, once the next version of the Management Plan is approved. Logger stopped recording in RD1189 and RD111192 13 June 2024 and site will conduct a VWP inspection study to determine if loggers can be repaired/replaced.
8. MB1VWP logger stopped recording up to 16 May 2024 – battery replaced in logger during Q3-2024. Next scheduled data download scheduled during Q4-2024.
9. The following VWPs wires are considered disabled: WND16-VWP2 and WND16-VWP3 (unstable and disabled respectively), WND26-VWP4 (disabled).

Acronyms: DD = diamond drill hole. mAHD = meters above Australian Height Datum (the elevation of the water level is calculated by subtracting the Depth to Water from the reference elevation). n/a = not available. NS = not sampled. RH = rotary drill hole. VWP = Vibrating wire piezometer and logger. Seam acronyms: BK = Blakefield seam; BY = Bayswater seam; MA = Mt Arthur seam; PF = Piercefield seam; INT = Interburden; WB = Wambo seam; RB = Redbank Creek seam; WA = tbc; WH = Woodlands Hill seam; WN = Whynot seam; WY = Wynn seam. WW = Warkworth seam; ZZ = indicates that the seam is intruded or heat affected.

APPENDIX 1 – AIR QUALITY MONITORING LOCATIONS

APPENDIX 2 – SURFACE WATER MONITORING LOCATIONS

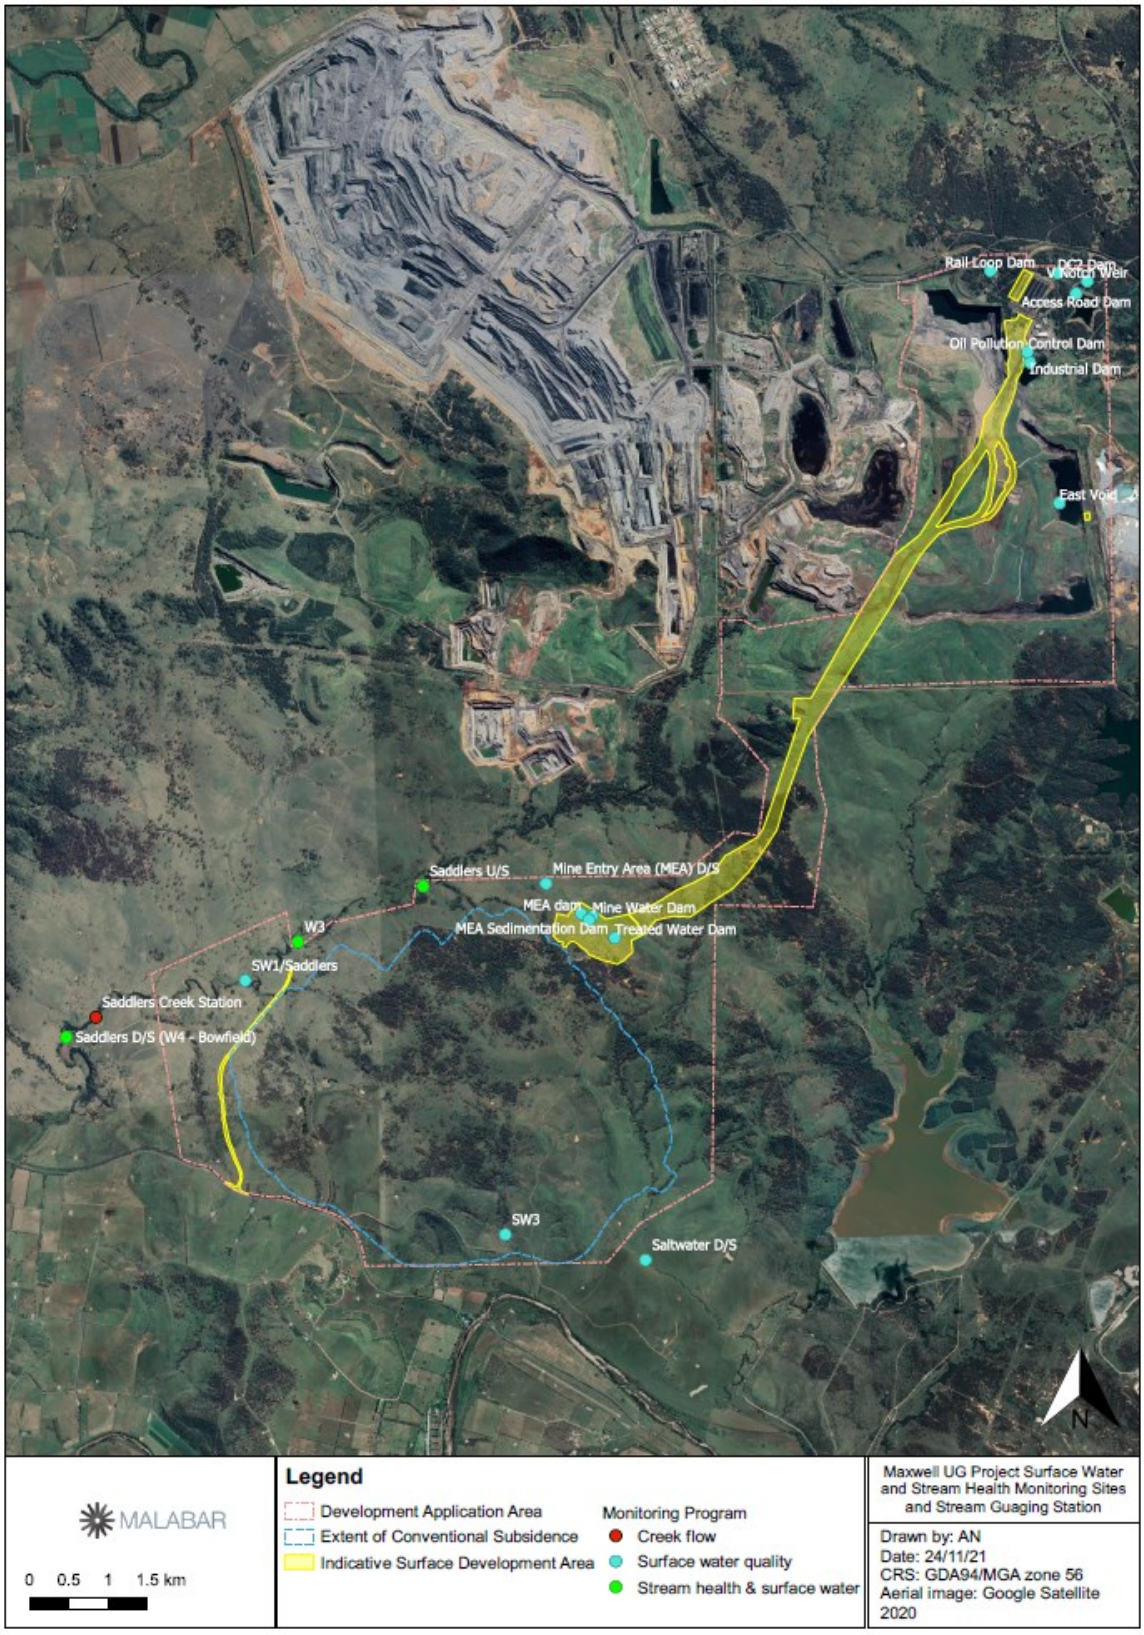

APPENDIX 3 – GROUNDWATER MONITORING LOCATIONS

APPENDIX 4 – CONSULTANT HYDROGEOLOGIST REPORT PROVIDING HYDROGRAPHS AND DATA ANALYSIS

Maxwell Underground Mine

Groundwater Monitoring Report – Quarter 3 – 2024

Malabar Resources Pty Ltd

PMB9 Thomas Mitchell Drive
Muswellbrook NSW 2333

Prepared by:

SLR Consulting Australia

Tenancy 202 Submarine School, Sub Base
Platypus, 120 High Street, North Sydney NSW
2060, Australia

SLR Project No.: 610.031830.00001

Client Reference No.: ANE145 Maxwell Quarterly Groundwater Reviews 2024

28 November 2024

Revision: 1

Revision Record

Revision	Date	Prepared By	Checked By	Authorised By
1	22 November 2024	Raymond Minnaar	David Western	David Western
2	28 November 2024	Raymond Minnaar	David Western	David Western

Basis of Report

This report has been prepared by SLR Consulting Australia (SLR) with all reasonable skill, care and diligence, and taking account of the timescale and resources allocated to it by agreement with Malabar Resources Pty Ltd (the Client). Information reported herein is based on the interpretation of data collected, which has been accepted in good faith as being accurate and valid.

This report is for the exclusive use of the Client. No warranties or guarantees are expressed or should be inferred by any third parties. This report may not be relied upon by other parties without written consent from SLR.

SLR disclaims any responsibility to the Client and others in respect of any matters outside the agreed scope of the work.

Table of Contents

Basis of Report ..... **i**
Acronyms and Abbreviations ..... **iv**
1.0 Introduction **1**
1.1 Groundwater Data Limitations 1
1.2 Groundwater Monitoring Parameters and Frequency 1
2.0 Groundwater Level Trigger Review **3**
2.1 Normal Level 6
2.2 TARP Level 1 7
2.3 TARP Level 2 7
2.4 General Observations 7
3.0 Groundwater Quality Trigger Review **8**
3.1 Normal Level 8
3.2 TARP Level 1 9
3.3 TARP Level 2 9
3.4 General Observations 9
4.0 Recommendations **10**
4.1 Actions – Reporting 10
4.2 Actions – Monitoring and Sampling 10
5.0 References **11**
6.0 Feedback **11**

Tables in Text

Table 1 Groundwater Monitoring Bore Network – Maxwell Underground (MXU) and Maxwell Infrastructure (MI) 3
Table 2 Groundwater Level TARP Criteria Exceedance Status – Shallow and Deep Open Bores 6
Table 3 TARP Criteria Exceedances for pH and EC for the Period July – September 2024 8

Figures in Text

Figure 1 Maxwell Underground Project and Groundwater Monitoring Network 2

Appendices

Appendix A **Trigger Action Response Plan & Groundwater Level Triggers**

Appendix B **Groundwater and Trigger Levels**

Appendix C **Groundwater Quality and Trigger Levels (only sites within the TARP)**

Acronyms and Abbreviations

Cbased	Cbased Environmental Pty Ltd
EC	Electrical Conductivity
GWMP	Groundwater Management Plan
mAHD	Metres *above* Australian Height Datum
Malabar	Malabar Resources Pty Ltd
mbgl	Metres below ground level
mbTOC	Metres below top of casing
MI	Maxwell Infrastructure
MU	Maxwell Underground
SLR	SLR Consulting Australia Pty Ltd
TARP	Trigger Action Response Plan
VWP	Vibrating Wire Piezometer

1.0 Introduction

SLR Consulting Australia Pty Ltd (SLR) was engaged by Malabar Resources Pty Ltd (Malabar) to perform a quarterly groundwater review of data collected by Cbased Environmental Pty Ltd (CBased) for the Maxwell Underground (MXU) mine and Maxwell Infrastructure (MI). The quarterly groundwater assessment supports the annual review compliance reporting conducted by Malabar Resources and acts as an early warning procedure for any performance trigger exceedances.

This quarterly report provides an overview of the groundwater data collected at the relevant monitoring bores for the period July–September 2024 and assesses this data against the Trigger Action Response Plan (TARP) threshold levels presented in the Groundwater Management Plan (GWMP) contained within the Maxwell Water Management Plan (December 2023). The groundwater monitoring network is illustrated in **Figure 1**.

1.1 Groundwater Data Limitations

The following outlines any data gaps in groundwater levels or quality identified for the review period:

- Groundwater levels and quality results for private bores were not available and therefore not presented.

1.2 Groundwater Monitoring Parameters and Frequency

The groundwater monitoring parameters and the frequency of monitoring as per the GWMP is presented below:

- Standpipes – *Bores without automatic dataloggers*
  - Groundwater level – monthly manual measurements.
    - Automatic dataloggers have been installed in all monitoring standpipes/ bores (except bore DS1). Data recording frequency varies between 1 to 4 times per day depending on the individual bore. Manual groundwater level measurements are also taken to supplement the automatic dataloggers biannually (depending on the site).
  - pH, electrical conductivity, redox potential, temperature – quarterly.
  - Total dissolved solids, total suspended solids, major cations/anions, total alkalinity, dissolved and total metals – biannually (twice per year).
- Bore DS1 (in accordance with EPL 1323 Condition U1.1)
  - Reduced standing water level, pH, electrical conductivity, total dissolved solids, salinity – monthly.
- Data loggers and VWPs – *Bores installed with automatic dataloggers or VWPs*
  - Reduced standing water level from VWP data loggers – downloaded quarterly.

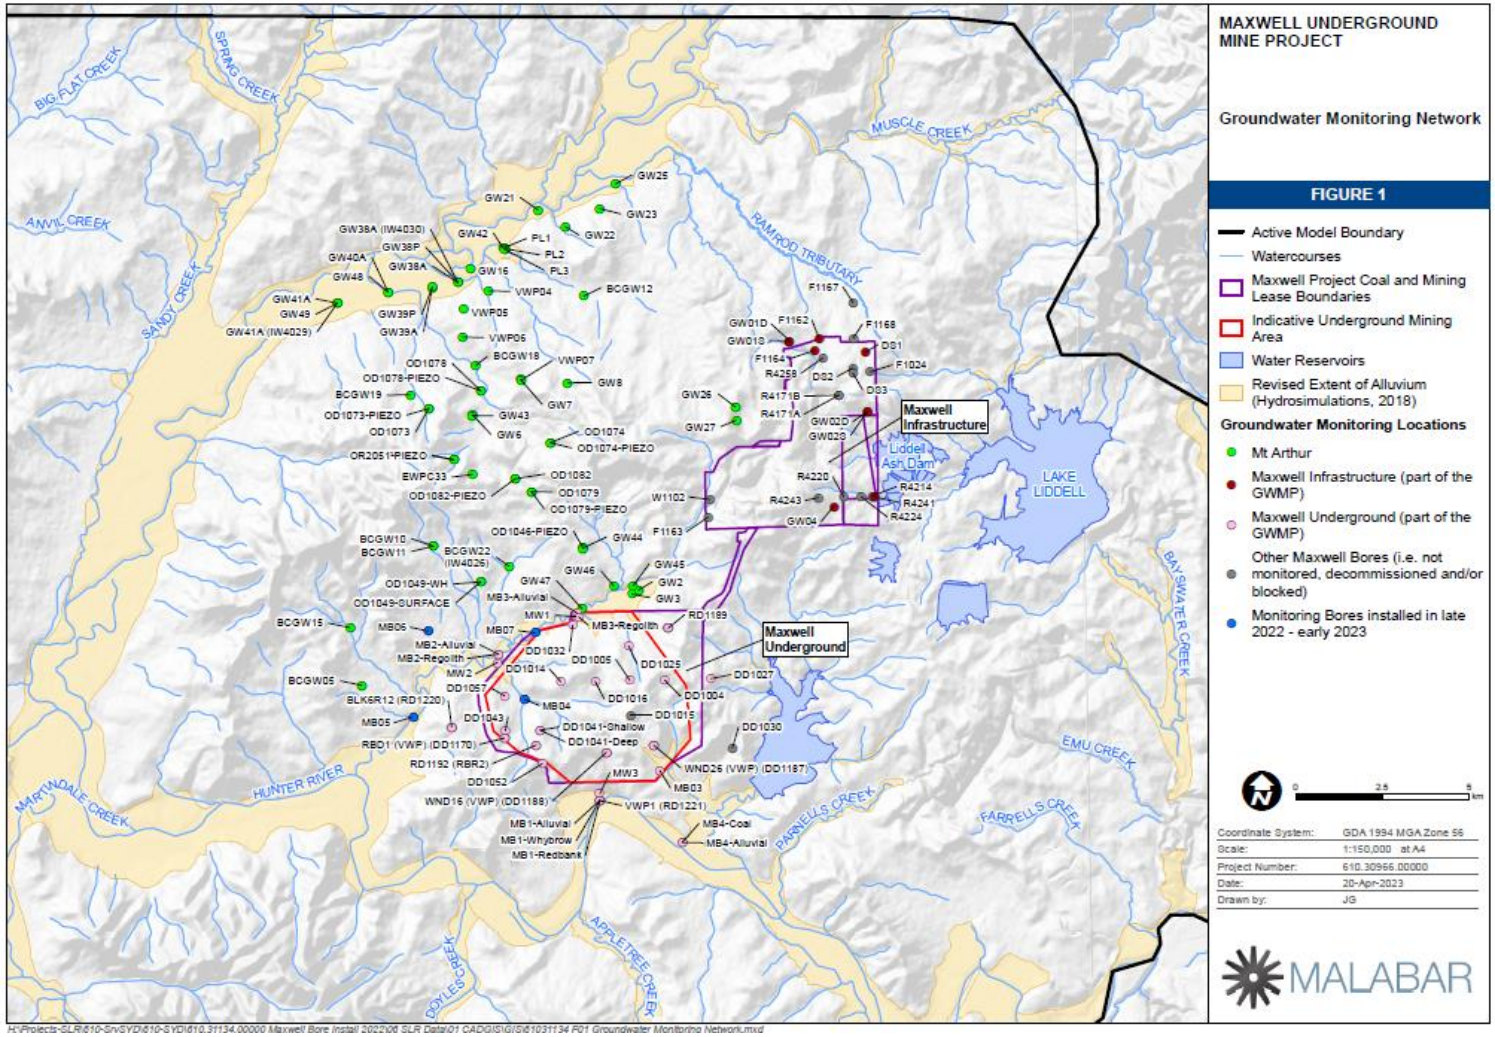

Figure 1 Maxwell Underground Project and Groundwater Monitoring Network

2.0 Groundwater Level Trigger Review

This section addresses the compliance of groundwater levels during the reporting period in relation to a trigger analysis.

Groundwater level monitoring bores and VWPs in the vicinity of the Maxwell Project, and their available completion details, are listed in **Table 1** below.

Table 1 Groundwater Monitoring Bore Network – Maxwell Underground (MXU) and Maxwell Infrastructure (MI)

Monitoring Bore or VWP ID	Easting [1] (GDA94)	Northing [1] (GDA94)	Geology	Bore Screen or VWP Sensor Depth (mBGL)	Status
Maxwell Infrastructure - MI (standpipe)					
DS1	305592	6420380	Shallow bedrock aquifer	15	Open
F1162	301045	6420755	Greta Coal Measures	274	Open
F1164	304223	6420406	Greta Coal Measures	190.5	Open
R4241	305793	6416224	Jurassic Volcanics	150	Open
GW01S	303386	6420691	Base Regolith	12–15	Problem [2]
GW01D	303391	6420683	Greta Coal Measures	29–32	Open
GW02S	305592	6420380	Base Regolith	8–14	Open
GW02D	301045	6420755	Greta Coal Measures	69–72	Open
GW04	304223	6420406	Permian Sequence	101–104	Open
Maxwell Underground (MUG) – standpipes					
MB1 - Redbank	297930	6407453	Redbank Seam	51–57	Open
MB1 - Whybrow	297928	6407448	Whybrow Seam	25–28	Open
MB1A	297933	6407459	Hunter River Alluvium	8–11	Open
MB2R	295004	6411675	Regolith	20–29	Open
MB2A	294998	6411669	Saddlers Creek Alluvium	5–7	Open
MB3R	297328	6412729	Regolith	27–30	Open
MB3A	297269	6412850	Saddlers Creek Alluvium (upslope)	8.5–14.5	Open
MB4 - Coal	300302	6406234	JPS-Coal	42–47	Open
MB4A	300307	6406231	Hunter River Alluvium	10–18	Open
MB03	299649	6408297	Saltwater Creek Alluvium	5–8	Problem [2]
MW1	297254	6412760	Saddlers Creek Alluvium (upslope)	6–9	Open
MW2	294977	6411419	Saddlers Creek Alluvium	4–9.5	Open
MW3	297904	6407652	Hunter River Alluvium	2.9–6.9	Problem [3]
MB04	295755	6410371	Unnamed Creek Regolith	10-13	Open
MB05	292546.7	6409857	Saddlers Creek alluvium	1.8-3.8	Open

Monitoring Bore or VWP ID	Easting [1] (GDA94)	Northing [1] (GDA94)	Geology	Bore Screen or VWP Sensor Depth (mBGL)	Status
MB06_S	292980.2	6412335	Woodland Hill Overburden	29-32	Open
MB06_D	292980.2	6412335	Bowfield Seam	95-101	Open
MB07	296070.3	6412297	Saddlers Creek Alluvium	3-5.5	Open
DD1005	298799	6410901	Blakefield Overburden	138.6	Open
DD1014	296799	6410864	Blakefield Overburden	90.5	Open
DD1015	298815	6409900	Blakefield Overburden	162.5	Problem [4]
DD1016	297801	6410882	Blakefield Overburden	126.4	Open
DD1025	298764	6411901	Blakefield Overburden	44.6	Problem [5]
DD1027	301133	6410960	Edderton Seam	252.8	Problem [6]
DD1032	297143	6412495	Piercefield Overburden	276.5	Open
DD1043	295200	6409458	Woodlands Hill Overburden	182–203	Open
DD1052	296274	6408513	Whynot Seam Overburden	105–127	Open
DD1057	295181	6410458	Arrowfield Overburden	164–188	Open
Maxwell Underground (MUG) – Vibrating Wire Piezometers (VWPs)					
RD1189 (SD1_DD001)	299896	6412419	Woodlands Hill Seam	78.9	Problem [7]
			AZZBF	145.5	Problem [7]
			WW12	186.2	Problem [7]
			MAL	230	Problem [7]
			PF2	255.5	Problem [7]
			BY2	315	Problem [7]
			WY2	322	Problem [7]
RD1192 (RBR2)	296092	6409038	Wambo Seam	61.2	Problem [7]
			Redbank Seam	80	Problem [7]
			Blakefield Seam	148.5	Problem [7]
BLK6R12 (RD1220)	293653	6409558	WB2 Seam	25	Normal
			Redbank Seam	40.5	Normal
			Whynot Seam	86.5	Normal
			Blakefield Seam	148.5	Normal
VWP1 (RD1221) (RDW006A) (MB01 VWP)	297926	6407444	Interburden	21	Normal
			Interburden	40	Problem [8]
			Interburden	73	Problem [8]
			Whybrow Seam	87	Problem [8]
			Whynot Seam	109.2	Problem [8]
			Blakefield Seam	138	Problem [8]
RBD1 (DD1170)	295178	6409246	Whybrow Seam	24.65	Normal
			Redbank Seam	33.55	Normal

Monitoring Bore or VWP ID	Easting [1] (GDA94)	Northing [1] (GDA94)	Geology	Bore Screen or VWP Sensor Depth (mBGL)	Status
			Whynot Seam	79.5	Normal
			Blakefield Seam	103.3	Normal
WND16 (DD1188)	298122	6408842	Wambo Seam	33.75	Normal
			Whynot Seam	59.25	Problem [9]
			Blakefield Seam	90.15	Problem [9]
			Blakefield Seam	110.5	Normal
WND26 (DD1187)	299487	6409044	Whybrow Seam	77.3	Normal
			Redbank Seam	84.6	Normal
			Wambo Seam	123.45	Normal
			Whynot Seam	144.25	Problem [9]

Notes:

1 Coordinates in metres (GDA 1994 MGA Zone 56).

2 GW01S did not have sufficient water present within bore during Q3-2024 to take a water quality sample. MB03 was reported as dry during Q3-2024.

3 MW3 was last recorded dry; as per the recommendations in the 2022 Annual Review, it is proposed that MW3 will be removed from the reporting, once the next version of the Management Plan is approved.

4 DD1015 is reported blocked during the reporting period; DD1027 is deemed to bring no significant value to future groundwater assessments as it monitors the Edderton Seam which is not targeted by the Maxwell UG Mine. As per the recommendations in the 2022 Annual Review, these monitoring locations will be removed from the reporting, once the next version of the GWMP is approved. The site is reviewing the GWMP, as it requires incorporation of the recommendations made in the 2022 and 2023 Annual Reviews, not currently included in the current GWMP.

5 DD1025 was decommissioned in December 2022 for safety reasons (to prevent inrush to the upcoming underground mining operations). As per the recommendations in the 2023 Annual Review, it is proposed that this site will be replaced by DD1014 for the purposes of the TARP assessment in Appendix A, once a revised GWMP has been approved. The site is reviewing the GWMP, as it requires incorporation of the recommendations made in the 2023 Annual Reviews, not currently included in the current GWMP.

6 DD1027 Access to this bore poses safety concerns for sampling as it is in an isolated location, across a steep gully. The 2023 Annual Review recommended the removal of DD1027 from the Groundwater Monitoring Plan.

7 Historically groundwater levels at RD1189 VWP2, VWP5 & VWP7 appear unstable and are not reported. As per the recommendations in the 2022 Annual Review, these monitoring datasets will be removed from the reporting, once the next version of the GWMP is approved. The site is reviewing the GWMP, as it requires incorporation of the recommendations made in the 2022 and 2023 Annual Reviews, not currently included in the current GWMP. The site is planning a VWP Investigation to determine if the sensors could possible be fixed since loggers have stopped recording readings since 13 June 2024.

8 VWP1 sensor 6 indicates no data and not reported. VWP2-5 indicated erratic spikes in data readings. VWPs inspected during May 2024 and found that logger box was corroded and potentially affecting data readings. A recommendation was made to replace the logger box during a follow up VWP study.

9 The following VWPs wires are considered disabled: WND16-VWP2 and WND16-VWP3 (unstable and disabled respectively), WND26-VWP4 (disabled).

Definitions:

VWP – vibrating wire piezometer mBGL – metres below ground level EX – Existing

A – Alluvium R – Regolith JPS – Jerry's Plain Subgroup

Open – Functional for pressure/water level measurements and/or quality sampling

Closed – Decommissioned/ To be removed

Problem – Blocked/Dry/Issue detected during monitoring period

Table 2 outlines the groundwater level trigger exceedance status for each monitored bore during the review period and indicates where TARP level 1 and 2 exceedances have occurred . The approved trigger levels and TARP level criteria are presented in **Appendix A**. Hydrographs for all groundwater monitoring locations including those with approved groundwater level trigger levels are presented in **Appendix B**.

Section 2.1 – Section 2.3 discusses briefly any TARP groundwater level criteria exceedances observed during the reporting period only, as identified in **Table 2**.

Table 2 Groundwater Level TARP Criteria Exceedance Status – Shallow and Deep Open Bores

Bore	TARP Criteria – GW Level [mAHD]	Previous Monitoring Period Q2-2024			Current Monitoring Period Q3-2024		
		Apr 24	May 24	Jun 24	Jul 24	Aug 24	Sept 24
Maxwell Infrastructure		**Water Management Plan (Dec 2023)**					
R4241	173.6	N	N	N	N	N	N
GW01D	198.2	N	N	N	N	N	N
GW01S	197.0	N	N	N	N	N	N
GW02D	135.7	Y	N	N	Y	Y	Y
GW02S	187.7	N	N	N	N	N	N
Maxwell Underground		**Water Management Plan (Dec 2023)**					
DD1025 [1]	157.3	*Decommissioned*			*Decommissioned*		
DD1032	130.6	Y	Y	Y	Y	*	*
MB3-Alluvial	127.7	N	N	N	N	*	*
MB3-Regolith	127.3	N	N	N	N	*	*

mAHD – metres above Australian Height Datum

N:Normal Level TARP Level 1 TARP Level 2

Y: "Yes", short-term exceedance, less than 3 consecutive exceedances.

"" no groundwater level data available for this period – logger data downloaded quarterly – next download scheduled for Q4-2024.*

1 DD1025 - As per the recommendations in the 2023 Annual Review, it is proposed that this site will be replaced by DD1014 for the purposes of the TARP assessment in Appendix A, once a revised GWMP has been approved. The site will undertake a TARP criteria assessment to determine applicable water level TARP criteria for groundwater level.

2.1 Normal Level

Groundwater levels at the Maxwell Infrastructure groundwater monitoring sites R4241, GW01D, GW01S, and GW02S and at the Maxwell Underground sites MB3-Alluvial and MB3-Regolith were observed to be above the groundwater level trigger criteria over the reporting period and hence were within the Normal Level TARP criteria (**Appendix A**).

2.2 TARP Level 1

DD1032 continued to exceed the TARP Level 1 groundwater level trigger criteria over the reporting period. This exceedance is discussed in more detail in the SLR (2024) study that evaluated TARP exceedances, including DD1032. SLR (2024) found that the observed decline in groundwater levels at bore DD1032 pre-dates the commencement of mining activities at Maxwell UG, which began in early 2023. Given the extensive and long-term mining activities in the surrounding area, particularly those at Mt Arthur Mine, it was more likely that regional mining operations have influenced the groundwater levels at DD1032 rather than the recent activities at Maxwell UG or changes in climatic conditions. SLR (2024) recommended the removal of DD1032 from the TARP. Additionally, DD1032 is expected to be decommissioned in 2024 due to mining progression and its location within the indicative Maxwell UG mining area. Existing monitoring bores pair MB06S and MB06D was recommended as replacement of DD1032.

GW02D exceeded the TARP Level 1 groundwater level trigger criteria during Q3-2024 with three consecutive exceedances of the criteria being observed between July – September 2024. During Q2-2024 the TARP criteria was exceeded during April 2024 and observations returned to above the criteria during May and June 2024. GW02D was evaluated by SLR (2024) for exceedance of the TARP EC criteria. Additionally, GW02D groundwater level monitoring data were also evaluated. SLR (2024) noted that groundwater levels in GW02D have gradually decreased over the monitoring period, with limited groundwater responses to rainfall (CRD) being observed. An issue identified in GW02D was the accumulation of sediment at the bottom of the bore. Field sampling throughout 2023 noted that the logger was covered in mud. SLR (2024) concluded that the generally decreasing groundwater levels trends, increasing EC concentration over the monitoring period, sediment and mud observations in the bore, and limited-to-no response to rainfall, that it was expected the groundwater quality and levels may not be representative of actual aquifer conditions in the vicinity of GW02D. SLR (2024) recommended the removal of GW02D from the TARP. Therefore, no additional action is required due to the TARP Level 1 groundwater level exceedance observed during Q3-2024.

Apart from DD1032 and GW02D, there were no other TARP groundwater level criteria or Level 1 exceedances over the reporting period.

2.3 TARP Level 2

A TARP Level 2 exceedance is defined as where a Level 1 trigger review indicates trigger exceedances are caused by site activities and this has resulted in an exceedance of a Water Management Performance Measure in Table 4 of Development Consent SSD 9526. There were no TARP Level 2 groundwater level trigger exceedances over the reporting period.

2.4 General Observations

- MB03 was reported as dry during July 2024.
- GW01S was close to the bottom of the bore with the average groundwater level measured during the reporting period being 0.56 metres above the bottom of the bore.
- Groundwater levels in DD1005 showed a relatively large decline between Q2-2024 (143.17 mAHD) and Q3-2024 (141.19 mAHD). It is noted that groundwater levels in this bore have shown a steady decline since 2011, no groundwater level response to rainfall was observed, and the bore is located within the Maxwell Underground mining area.

3.0 Groundwater Quality Trigger Review

Trigger Action Response Plan (TARP) levels are defined for five sites for the Maxwell Infrastructure area and four sites for the Maxwell Underground area (Malabar Resources, December 2023) and presented in **Appendix A**.

An assessment of groundwater quality (EC and pH) at each of the monitored bore locations against the TARP criteria has been completed. EC and pH plots for groundwater monitoring locations with approved groundwater quality criteria are presented in **Appendix C**. A summary of the groundwater quality (electrical conductivity and pH) trigger levels during the reporting period at the monitored bores are presented in **Table 3**.

No groundwater quality results were available for the private bores for the reporting period. Results for the private bores are reviewed annually.

Table 3 TARP Criteria Exceedances for pH and EC for the Period July – September 2024

Bore	Period [Month Sampled - Analysis]	TARP Level		Q2 2024			Q3 2024		
		EC (µS/cm)	pH min/ max	EC (µS/cm)	pH lower	pH upper	EC (µS/cm)	pH lower	pH upper
R4241	Q3-2024 [Sept 24 – Field]	6,253	6 / 8.5	N	N	N	N	N	N
GW01S	-	9,260		*	*	*	*	*	*
GW01D	Q3-2024 [Sept 24 – Field]	5,680		Y	N	N	Y	N	N
GW02S	Q3-2024 [Sept 24 – Field]	9,480		N	N	N	N	N	N
GW02D	Q3-2024 [Sept 24 – Field]	10,500		Y	N	N	Y	N	N
DD1025[1]	*Decommissioned*			-	-	-	-	-	-
DD1032	Q3-2023 [Jul 24 – Lab]	7,170	6 / 8.5	N	N	N	N	N	N
MB3-Alluvial	Q3-2023 [Jul 24 – Lab]	9,009		N	N	N	N	N	N
MB3-Regolith	Q3-2023 [Jul 24 – Lab]	6,327		N	N	N	Y	N	N

N: Normal Level TARP Level 1 TARP Level 2

Y: "Yes", short-term exceedance, less than 3 consecutive exceedances.

"" no groundwater quality data available for this period – Not enough water present in bore for sampling.*

1 DD1025 - As per the recommendations in the 2023 Annual Review, it is proposed that this site will be replaced by DD1014 for the purposes of the TARP assessment in Appendix A, once a revised GWMP has been approved. The site will undertake a TARP criteria assessment to determine applicable TARP criteria for pH and EC concentration.

3.1 Normal Level

Groundwater quality at the Maxwell Infrastructure groundwater monitoring sites R4241 and GW02S (**Appendix C**) and at the Maxwell Underground sites DD1032 and MB3-Alluvial (**Appendix C**) were observed below the trigger criteria over the reporting period hence are within the Normal Level of the TARP criteria (**Appendix A** - **Table A1**).

3.2 TARP Level 1

During Q3-2024 GW02D continued to exceed the TARP Level 1 EC trigger criteria. SLR (2024) evaluated the TARP Level 1 EC trigger criteria exceedance at GW02D and concluded that when considering the generally decreasing groundwater levels trends over the monitoring period, increasing EC concentration over the monitoring period, sediment and mud observations in the bore, and limited-to-no response to rainfall, it was expected the groundwater quality and groundwater levels may not be representative of actual aquifer conditions in the vicinity of GW02D. Consequently, from the available monitoring data, SLR (2024) concluded that the rising EC levels in GW02D were likely more associated with localised factors rather than external influences such as nearby mining activities. SLR (2024) recommended the removal of GW02D from the TARP. No further action is required.

Apart from GW02D, there were no other TARP Level 1 quality trigger criteria exceedances over the reporting period.

3.3 TARP Level 2

There were no TARP Level 2 groundwater quality trigger exceedances over the reporting period.

3.4 General Observations

- GW01D exceeded the TARP EC trigger limit criteria during Q3-2024. The TARP EC trigger criteria were exceeded during Q2-2024 but did not exceed the criteria in Q1-2024. This is a short-term exceedance as it is less than 3 consecutive exceedances and does not result in TARP Level 1 exceedance.
- GW01D exceeded the TARP EC trigger criteria during Q3-2024. The TARP Level 1 EC trigger criteria were exceeded during Q1-2024 but did not exceed the criteria in Q2-2024. This is a short-term exceedance as it is less than 3 consecutive exceedances and does not result in TARP Level 1 exceedance.
- GW01S could not be sampled during Q3-2024 due to insufficient volume of water present in the bore for sampling. It is noted that this is the third concurrent sampling round where a sample could not be taken.

4.0 Recommendations

Based on the trigger exceedances assessed in **Section 2.0** and **Section 3.0** and the TARP criteria presented in **Appendix A**, the following actions are recommended:

4.1 Actions – Reporting

- Update the GWMP to incorporate recommended changes to the monitoring network recommended in the site's 2022 and 2023 Annual Reviews.

4.2 Actions – Monitoring and Sampling

- Incorporate any mine dewatering volume and mining floor elevations into the quarterly groundwater monitoring database and reporting as this data will be useful when interpreting groundwater level responses due to mining activities.

Sincerely,

SLR Consulting Australia



Raymond Minnaar
Associate Hydrogeologist

David Western
Technical Director – Hydrology and Hydrogeology

5.0 References

Malabar Resources, 2023. Water Management Plan. MXC_MP_EC_08 (13 December 2023), Version 3, Review 0.

SLR, 2023. Maxwell Underground Coal Mine Project. Annual Review 2023. Prepared for Malabar Resources, Report No: 630.030952.00001. March 2023.

SLR, 2024. Maxwell Groundwater Trigger Investigation 2024. Prepared for Malabar Resources, Report No: 610.031922.00001. July 2024.

6.0 Feedback

At SLR, we are committed to delivering professional quality service to our clients. We are constantly looking for ways to improve the quality of our deliverables and our service to our clients. Client feedback is a valuable tool in helping us prioritise services and resources according to our client needs.

To achieve this, your feedback on the team's performance, deliverables and service are valuable and SLR welcome all feedback via https://www.slrconsulting.com/en/feedback. We recognise the value of your time and we will make a $10 donation to our 2023 Charity Partner - Lifeline, for every completed form.

Appendix A Trigger Action Response Plan & Groundwater Level Triggers

Maxwell Underground Mine

Groundwater Monitoring Report – Quarter 3 – 2024

Malabar Resources Pty Ltd

SLR Project No.: 610.031830.00001

28 November 2024

Table A-1: Trigger Action Response Plan for the Maxwell Project monitoring bores – Groundwater Levels and Quality

Status	Trigger	Action	Response
Maxwell Infrastructure			
Normal	Groundwater level and quality below Maxwell Infrastructure Stage 1 groundwater triggers (*Table A3*).	Continue to minimise the long-term catchment areas of the mine voids and transfer water to and from voids. Continue water balance monitoring, groundwater monitoring, and assessment.	None
Level 1	Three consecutive groundwater level, pH or EC results exceed Maxwell Infrastructure Stage 1 groundwater triggers (*Table A3*).	A suitably qualified hydrogeologist reviews groundwater level or quality data to determine if trigger exceedances are caused by site activities and whether this has resulted in an exceedance of a Water Management Performance Measure in Table 4 of Development Consent SSD 9526.	If trigger exceedances are not caused by site activities and have not resulted in an exceedance of a Water Management Performance Measure in Table 4 of Development Consent SSD 9526, then review monitoring frequency. If trigger exceedances are caused by site activities and resulted in an exceedance of a Water Management Performance Measure in Table 4 of Development Consent SSD 9526, then undertake Level 2 Actions.
Level 2	Investigation following Level 1 trigger review indicates trigger exceedances are caused by site activities and this has resulted in an exceedance of a Water Management Performance Measure in Table 4 of Development Consent SSD 9526.	Undertake actions recommended by suitably qualified hydrogeologist which may include update to the groundwater model and/or review of monitoring program.	Report non-compliance. Undertake adaptive management strategies.
Maxwell Underground			
Normal	Groundwater level and quality below Maxwell Underground Stage 1 groundwater level triggers (*Table A3*).	Continue groundwater monitoring, and assessment.	None
Level 1	Three consecutive groundwater level, pH or EC results exceed Maxwell Underground Stage 1 groundwater level triggers (*Table A3*).	A suitably qualified hydrogeologist reviews groundwater level or quality data to determine if trigger exceedances are as a result of activities at the site and whether this has resulted in an exceedance of a Water Management Performance Measure in Table 4 of Development Consent SSD 9526.	If trigger exceedances are not caused by site activities and have not resulted in an exceedance of a Water Management Performance Measure in Table 4 of Development Consent SSD 9526, then review monitoring frequency.

Status	Trigger	Action	Response
			If trigger exceedances are caused by site activities and resulted in an exceedance of a Water Management Performance Measure in Table 4 of Development Consent SSD 9526, then undertake Level 2 Actions.
Level 2	Investigation following Level 1 trigger review indicates trigger exceedances are caused by activities at the Project and this has resulted in an exceedance of a Water Management Performance Measure in Table 4 of Development Consent SSD 9526.	Undertake actions recommended by suitably qualified hydrogeologist which may include update to the groundwater model and/or review of monitoring program.	Report non-compliance. Undertake adaptive management strategies. In consultation with suitably qualified hydrogeologist and other relevant specialists, undertake repair, mitigate and/or offset any adverse groundwater impacts of the development.

Table A-2: Trigger Action Response Plan for Privately-owned bores - Groundwater Levels and Quality

Status	Trigger	Action	Response
Groundwater levels			
Normal	Drawdown at privately-owned bores less than 2 m. No complaints about potential impacts of the site on privately- owned bores.	Continue regular monitoring and review of potentially impacted private bores (*refer to Section 5.2.2 of the GWMP*).	None
Level 1	Drawdown at privately-owned bores more than 2 m and/or complaint about potential impacts of the site on private bores.	A suitably qualified hydrogeologist reviews groundwater data to determine if 2 m drawdown is as a result of activities at the site (and/or MAC). Collect relevant data on privately-owned bores that are the subject of the complaint. Suitably qualified hydrogeologist to determine if privately-owned bore the subject of the complaint has been adversely and directly impacted as a result of the development (other than an impact that is minor or negligible).	If drawdown is not as a result of activities at the Project (and/or MAC) then review monitoring frequency. If privately-owned bore the subject of the complaint has not been adversely and directly impacted as a result of the development (other than an impact that is minor or negligible) then review monitoring frequency. If drawdown, or impacts the subject of the complaint, are due to site activities then undertake Level 2 actions.
Level 2	Investigation following Level 1 trigger review indicates drawdown is as a result of activities at the site.	Notify relevant bore owner and implement compensatory water supply actions. Undertake any other actions recommended by suitably qualified hydrogeologist which may include update to the groundwater model and/or review of monitoring program.	Review groundwater monitoring program.
Groundwater quality			
Normal	No change in beneficial use category	Continue regular monitoring and review of potentially impacted private bores (refer to *Section 5.2.2 of the GWMP*).	None
Level 1	Two consecutive monitoring results indicate a change in beneficial use category.	A suitably qualified hydrogeologist reviews groundwater data to determine if change in water quality is caused by activities at the site.	If a privately-owned bore has not been adversely and directly impacted as a result of the activities at the site, then review monitoring frequency. If change in water quality is changed by activities at the site, then undertake Level 2 actions.

Status	Trigger	Action	Response
Level 2	Investigation following Level 1 trigger review indicates change in water quality is caused by activities at the site.	Implement compensatory water supply actions. Undertake any other actions recommended by suitably qualified hydrogeologist which may include update to the groundwater model and/or review of monitoring program.	Review groundwater monitoring program.

Table A-3: Summary of groundwater level and quality triggers for alluvium and hard rock aquifers (Maxwell Project) – (GWMP – Malabar Resources, Dec 2023) and Annual Review 2023

Bore	Groundwater level, trigger level (mAHD)	pH trigger level - minimum	pH trigger level - maximum	EC trigger level (µS/cm)
Maxwell Infrastructure				
R4241	173.6	6.0	8.5	6,253
GW01D	198.2	6.0	8.5	5,680
GW01S	197.0	6.0	8.5	9,260
GW02D	135.7	6.0	8.5	10,500
GW02S	187.7	6.0	8.5	9,480
Maxwell Underground				
DD1025	157.3 (155.1 #) [1]	6.0	8.5	14,200
DD1032	130.6 (128.3 #)	6.0	8.5	7,170
MB3-A	127.7	6.0	8.5	9,009
MB3-R	127.3	6.0	8.5	6,327

 # Proposed levels in 2022 Annual Review and subject to approval of the GWMP

1 DD1025 to be replaced by DD1014 and TARP criteria for groundwater level, pH and EC concentration will be determined by a TARP criteria assessment

Table A-4: Groundwater Quality Categories: Electrical Conductivity - (GWMP – Malabar Resources, Nov 2021)

Beneficial use	Quality Range	Description
Marginal Potable	800 – 2,350 µS/cm (500 - 1,500 mg/L TDS)*	At the upper level this water is at the limit of potable water, but is suitable for watering of livestock, irrigation and other general uses
Irrigation	2,350 – 7,800 µS/cm (1,500 - 5,000 mg/L TDS)*	At the upper level, this water requires shandying for use as irrigation water or to be suitable for selective irrigation and watering of livestock
Saline	7,800 – 22,000 µS/cm (5,000 - 14,000 mg/L TDS)*	Generally unsuitable for most uses. It may be suitable for a diminishing range of salt-tolerant livestock up to about 6,500mg/L [~10,150 µS/cm] and some industrial uses
Highly Saline	>22,000 µS/cm (14,000 mg/L TDS)*	Suitable for coarse industrial processes up to about 20,000 mg/L [~31,000 µS/cm].

** Approximate EC ranges derived from TDS ranges, with conversion factor of 1.5625 applied. Source: National Land and Water Resources Audit (Murray Darling Basin Commission, 2005).*

Appendix B Groundwater and Trigger Levels

Maxwell Underground Mine

Groundwater Monitoring Report – Quarter 3 – 2024

Malabar Resources Pty Ltd

SLR Project No.: 610.031830.00001

28 November 2024

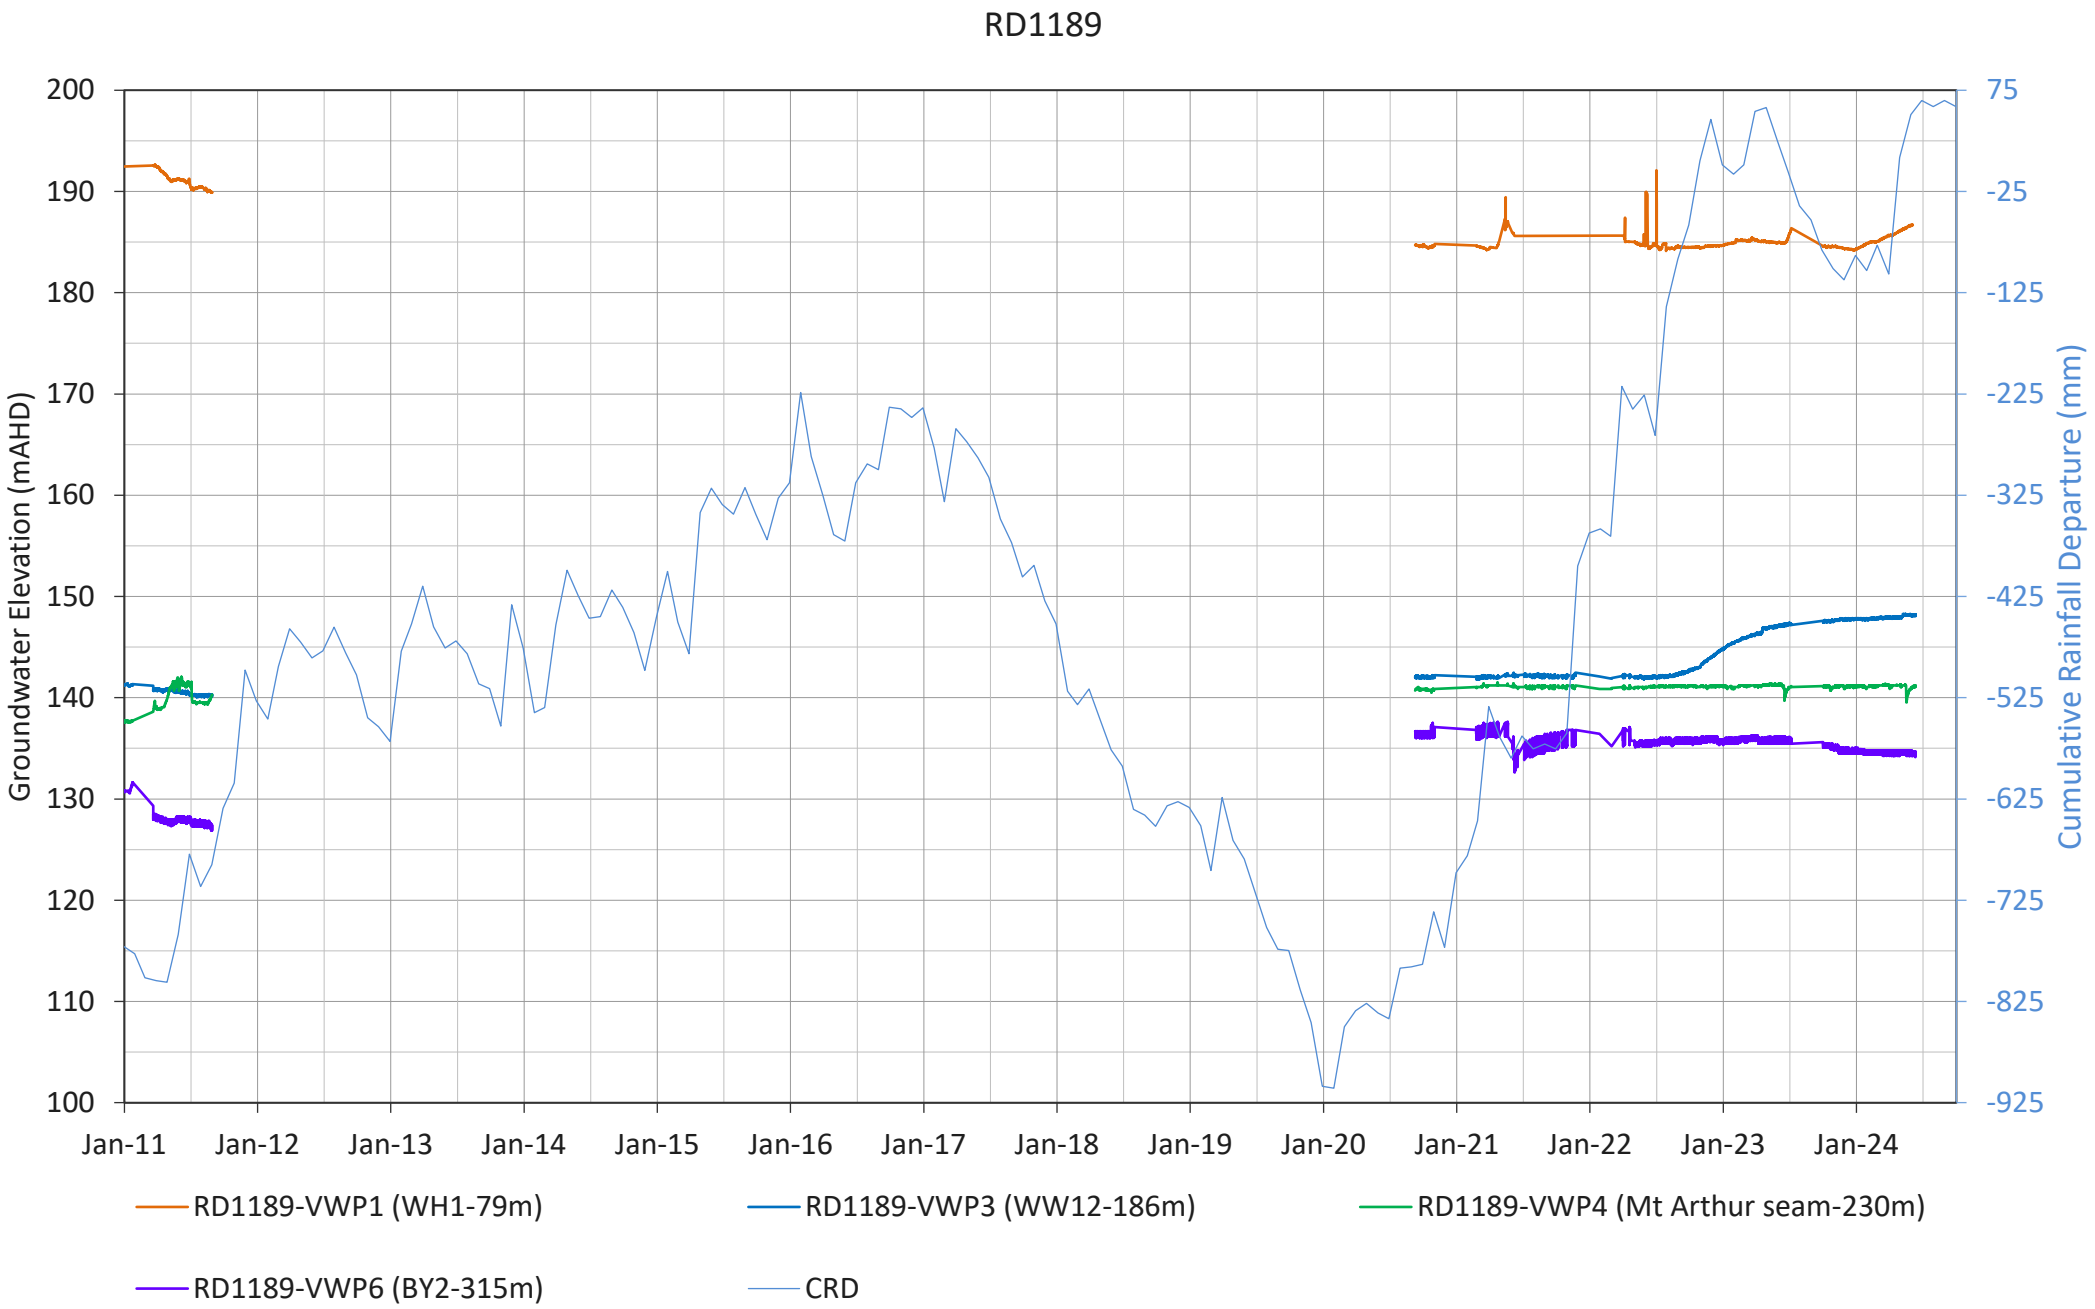
RD1189
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
200
190
180
170
160
150
140
130
120
110
100
75
-25
-125
-225
-325
-425
-525
-625
-725
-825
-925
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
RD1189-VWP1 (WH1-79m)
RD1189-VWP3 (WW12-186m)
RD1189-VWP4 (Mt Arthur seam-230m)
RD1189-VWP6 (BY2-315m)
CRD

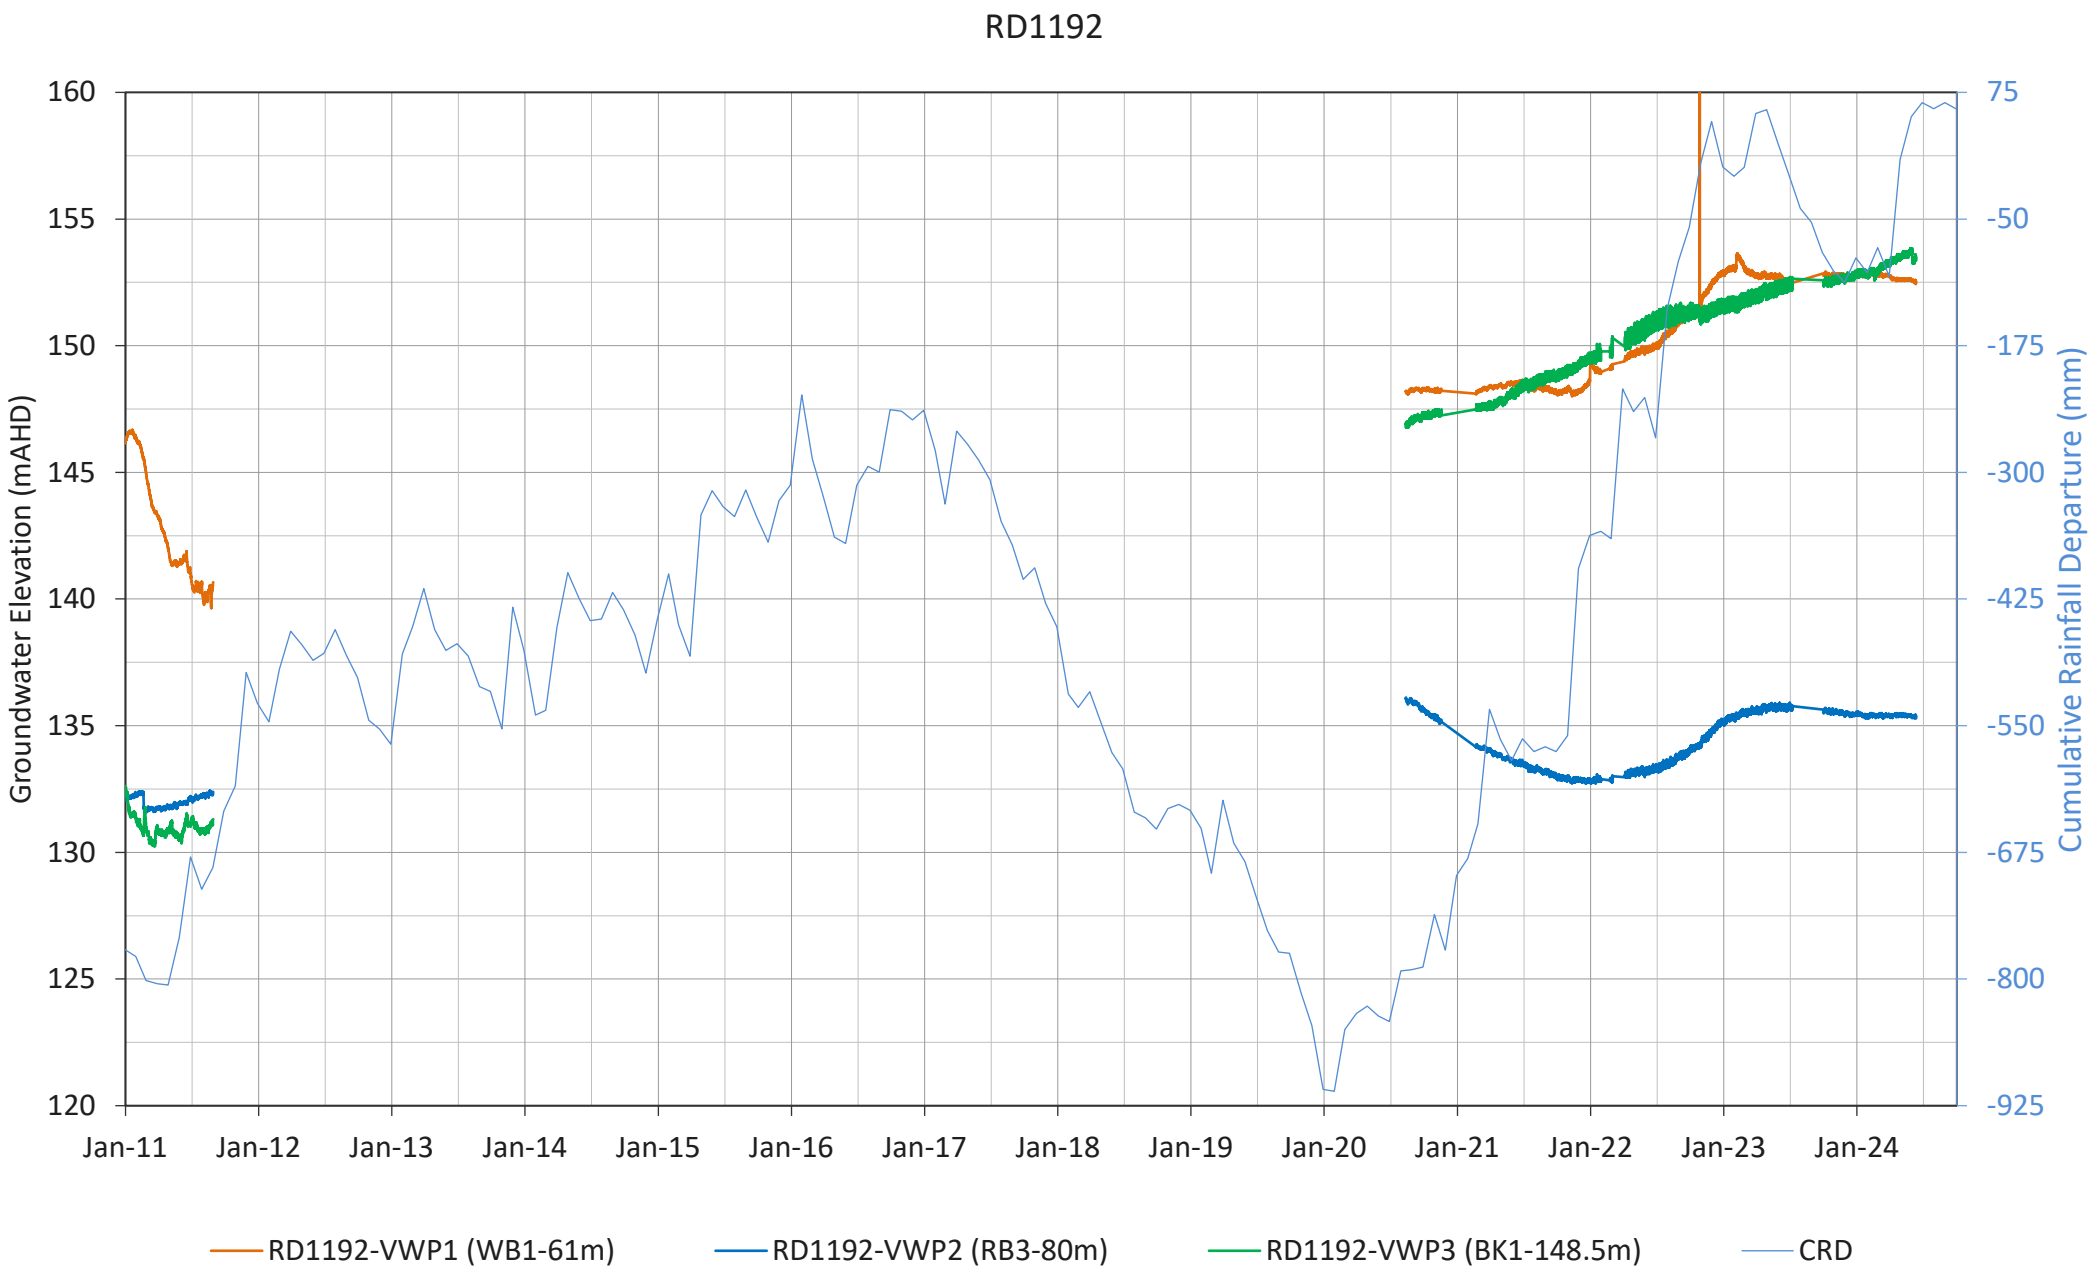
RD1192
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
160
155
150
145
140
135
130
125
120
75
-50
-175
-300
-425
-550
-675
-800
-925
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
RD1192-VWP1 (WB1-61m)
RD1192-VWP2 (RB3-80m)
RD1192-VWP3 (BK1-148.5m)
CRD

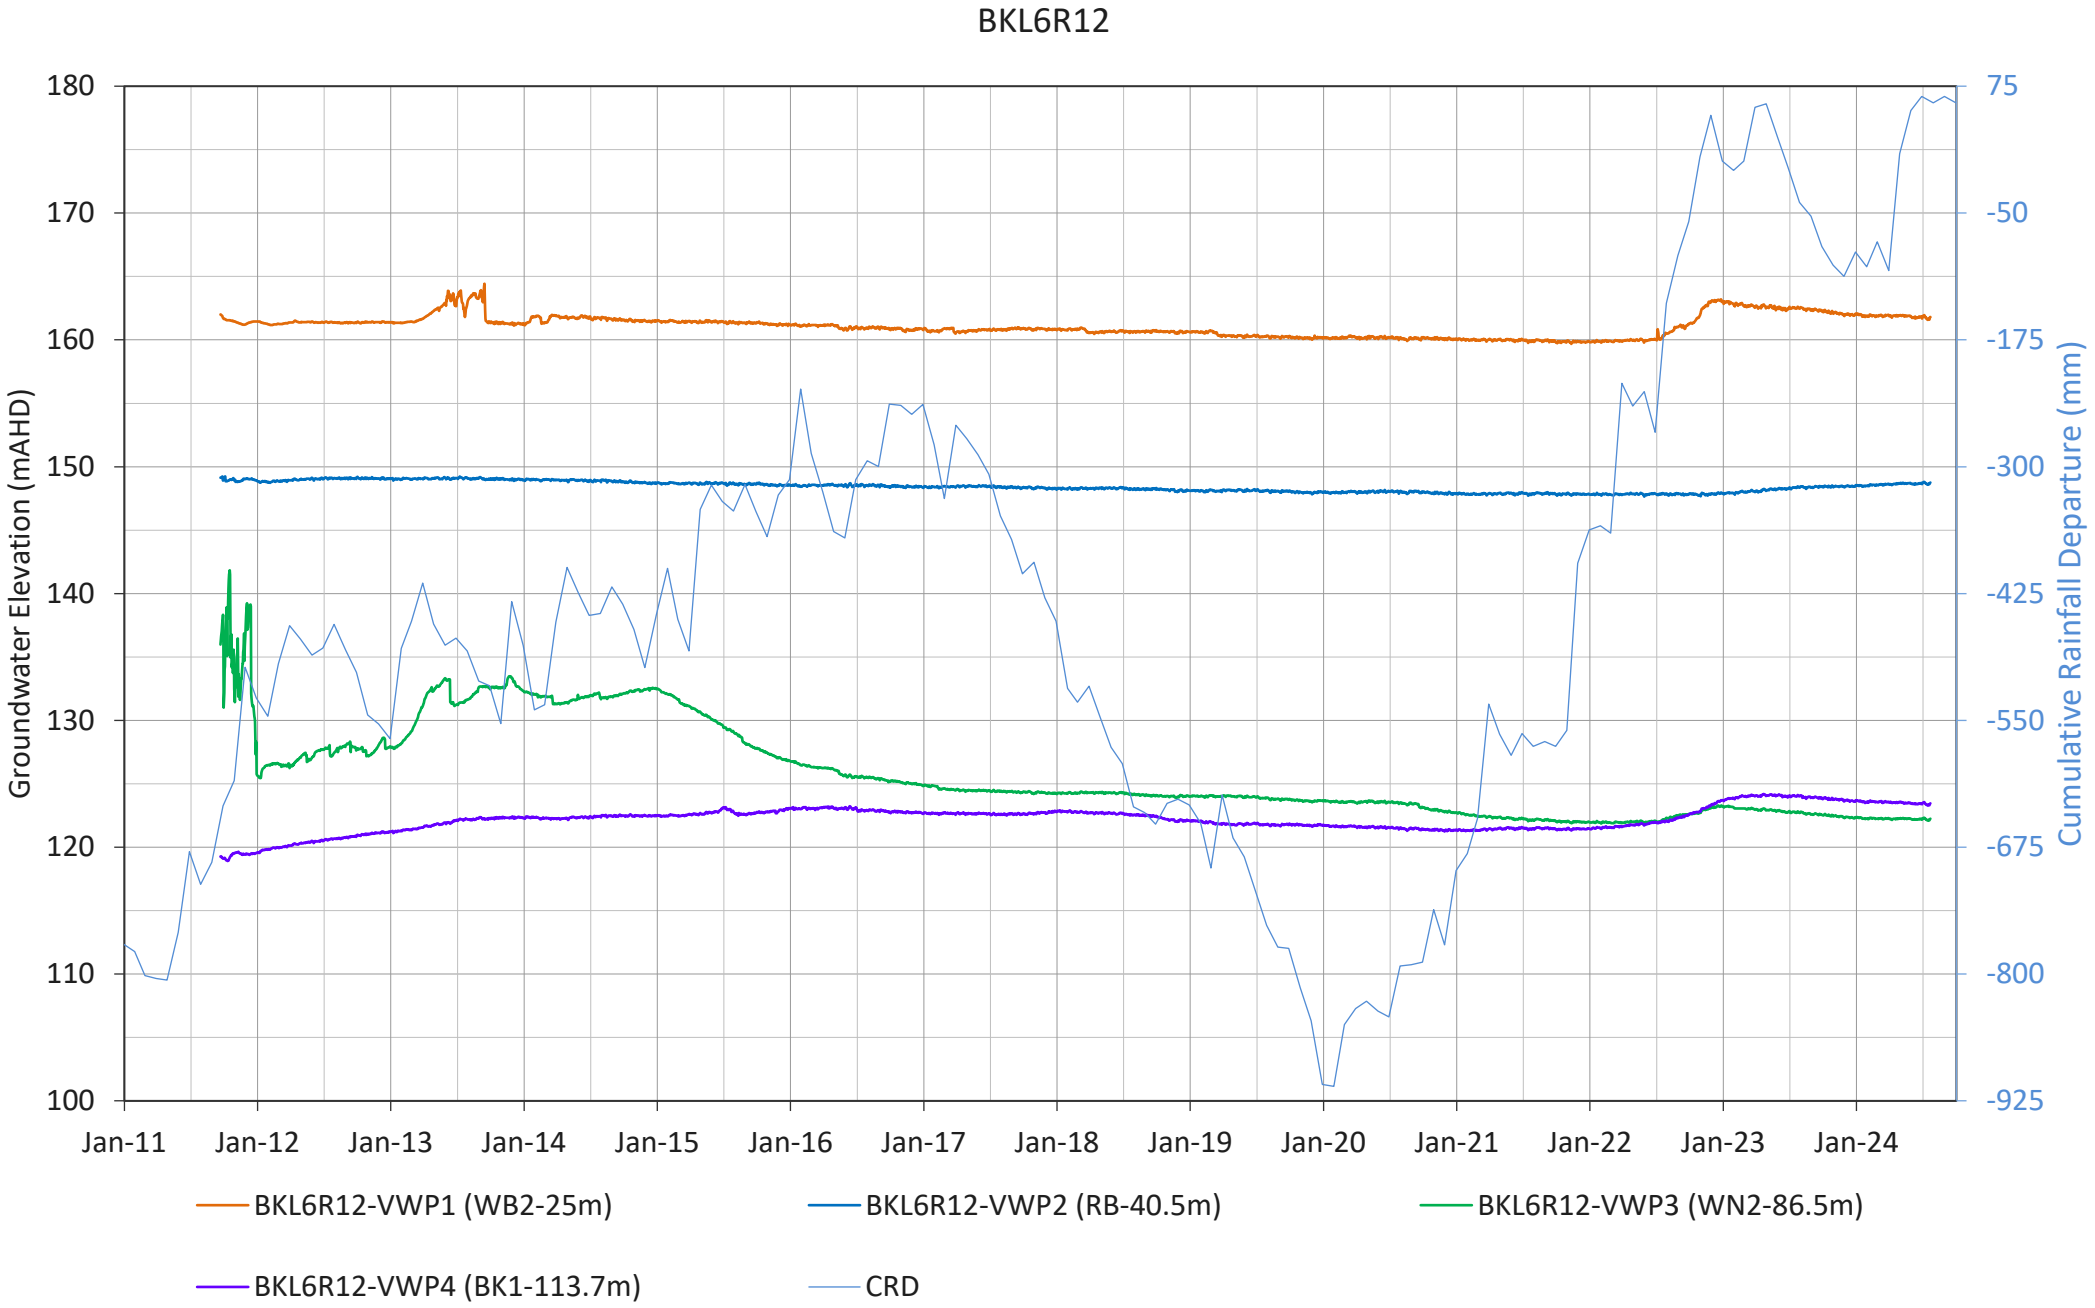
BKL6R12
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
180
170
160
150
140
130
120
110
100
75
-50
-175
-300
-425
-550
-675
-800
-925
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
BKL6R12-VWP1 (WB2-25m)
BKL6R12-VWP2 (RB-40.5m)
BKL6R12-VWP3 (WN2-86.5m)
BKL6R12-VWP4 (BK1-113.7m)
CRD

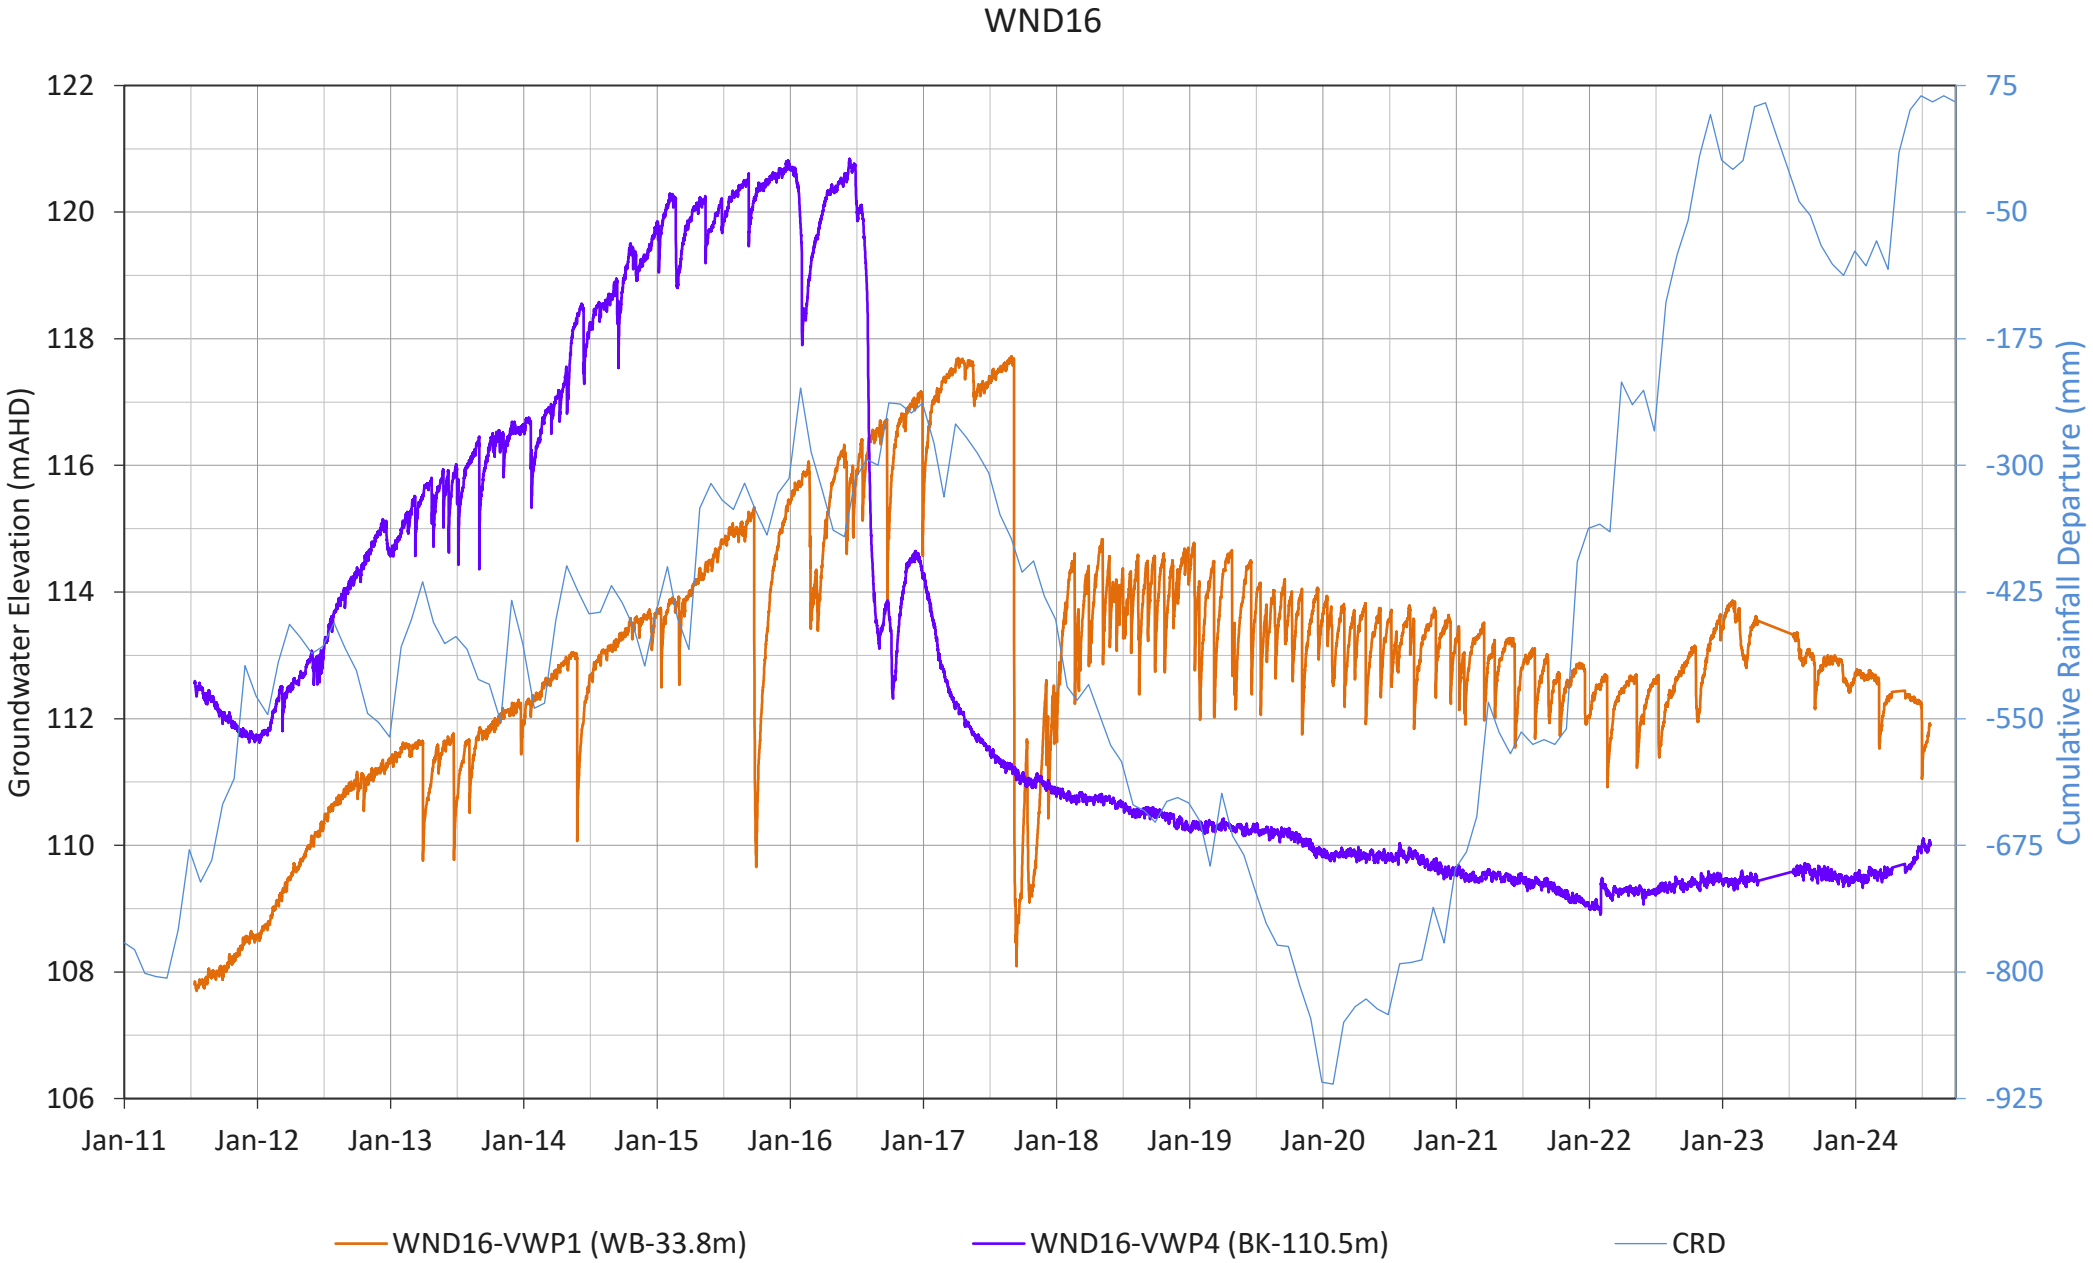
WND16
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
122
120
118
116
114
112
110
108
106
75
-50
-175
-300
-425
-550
-675
-800
-925
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
WND16-VWP1 (WB-33.8m)
WND16-VWP4 (BK-110.5m)
CRD

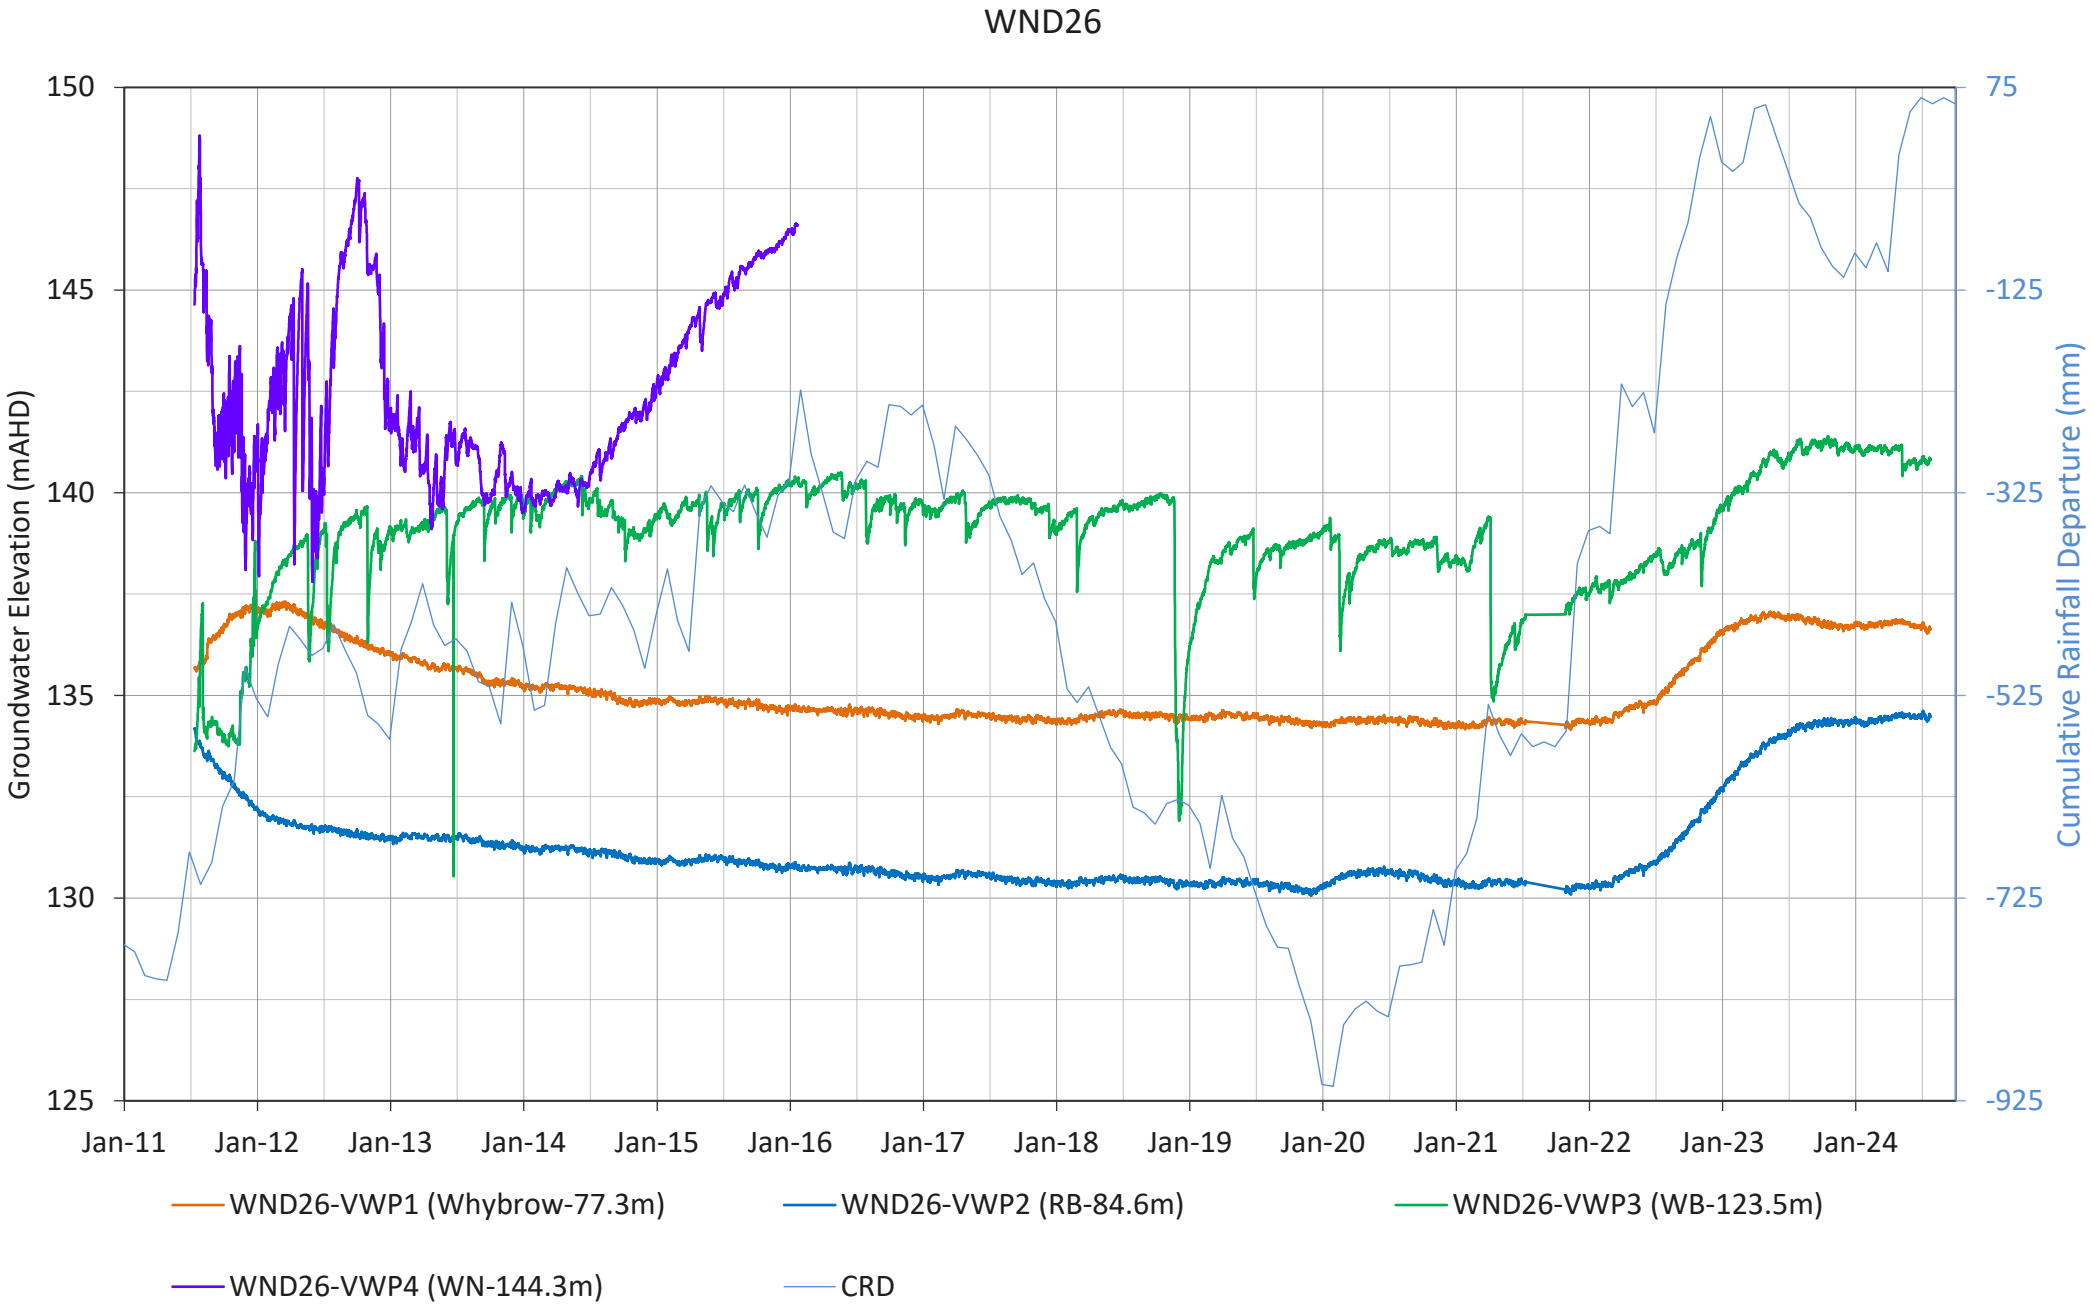
WND26
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
150
145
140
135
130
125
75
-125
-325
-525
-725
-925
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
WND26-VWP1 (Whybrow-77.3m)
WND26-VWP2 (RB-84.6m)
WND26-VWP3 (WB-123.5m)
WND26-VWP4 (WN-144.3m)
CRD

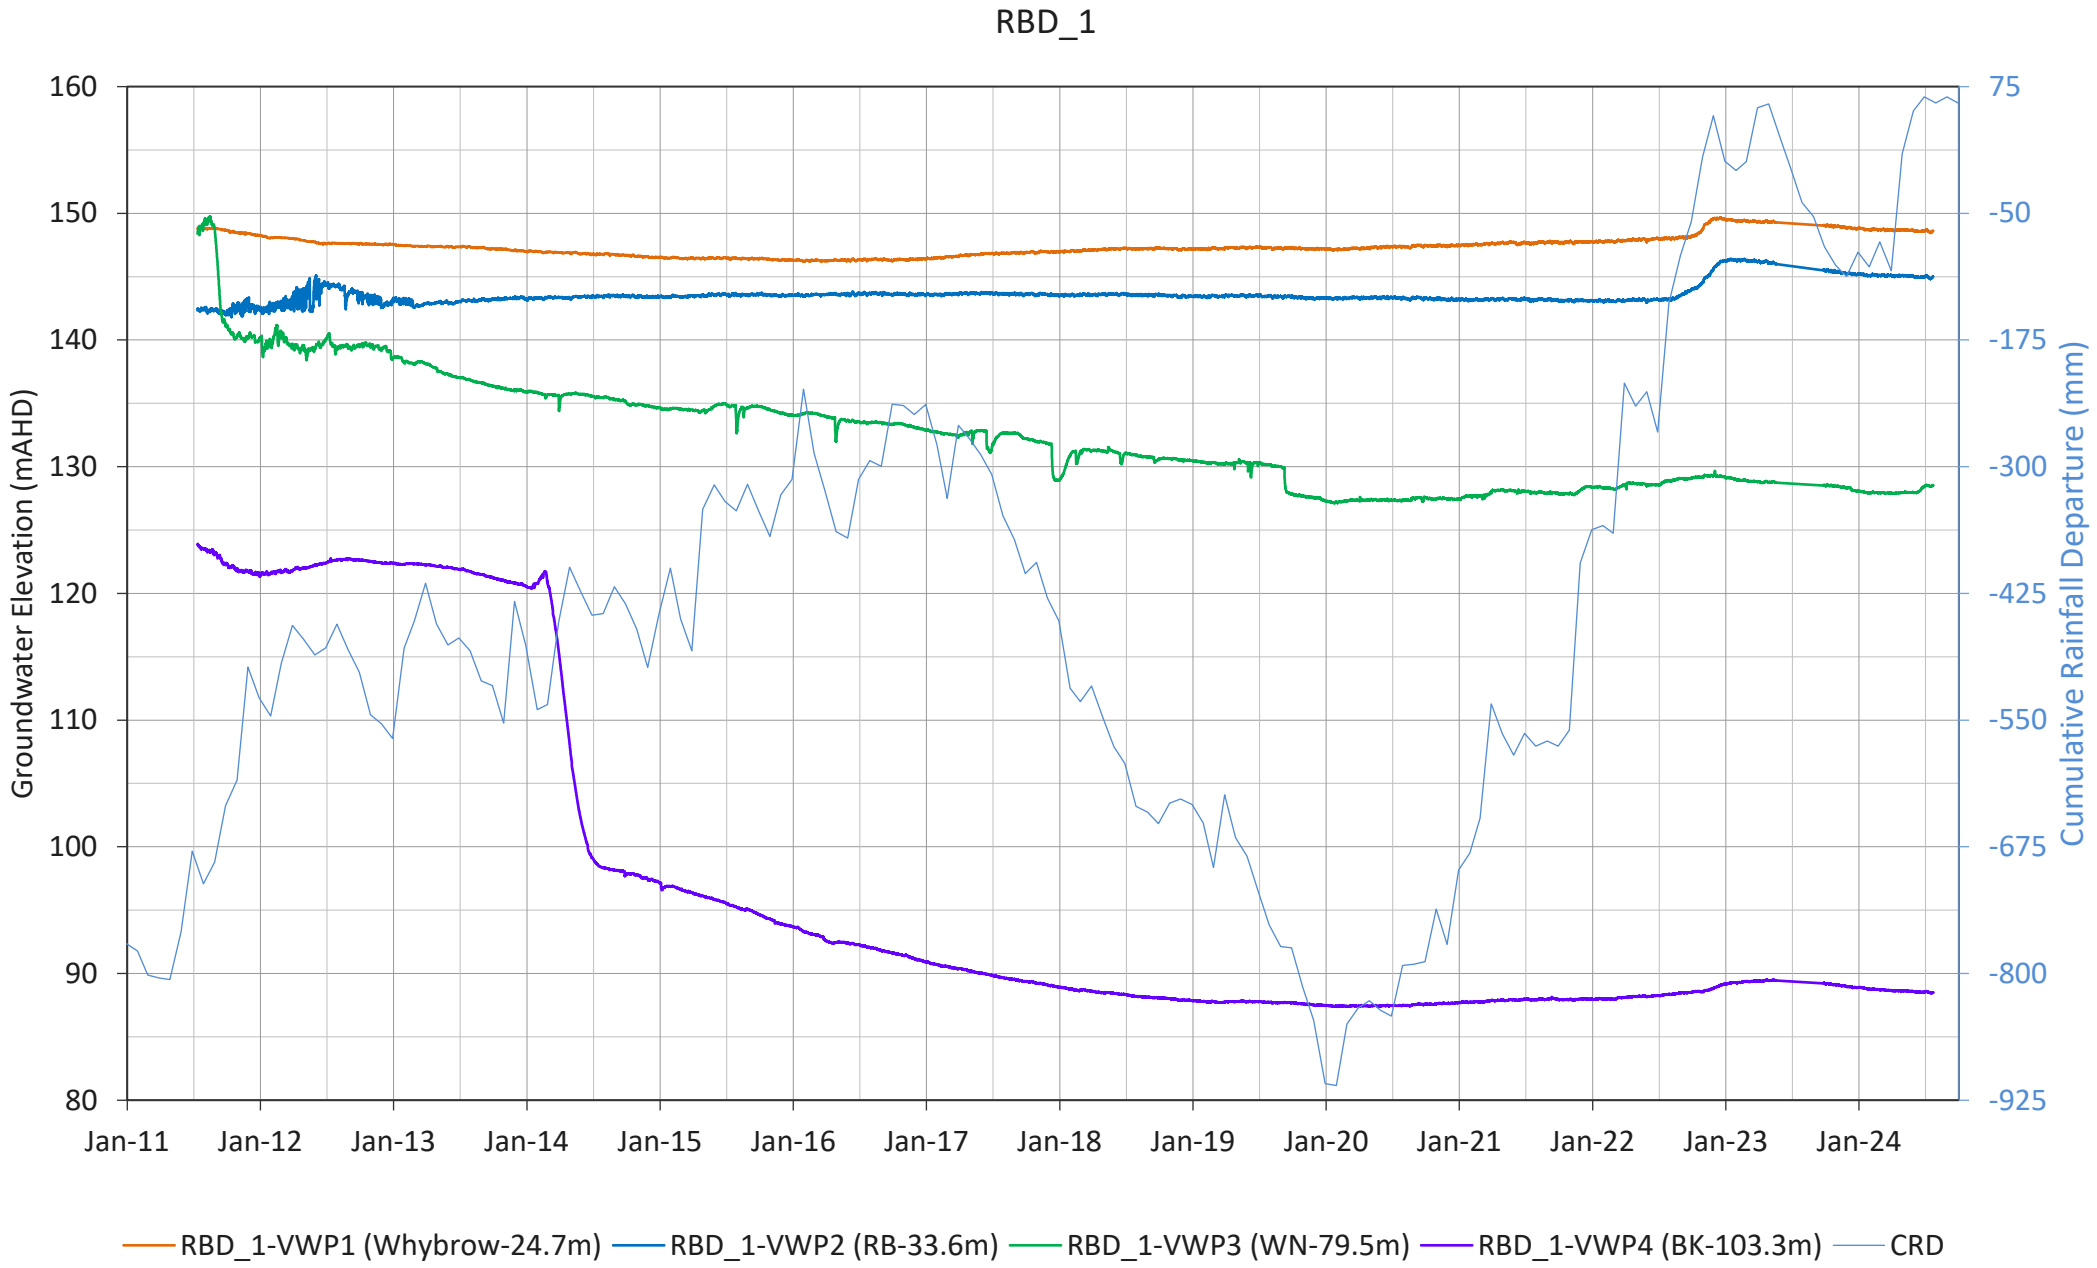
RBD_1
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
160
150
140
130
120
110
100
90
80
75
-50
-175
-300
-425
-550
-675
-800
-925
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
RBD_1-VWP1 (Whybrow-24.7m)
RBD_1-VWP2 (RB-33.6m)
RBD_1-VWP3 (WN-79.5m)
RBD_1-VWP4 (BK-103.3m)
CRD

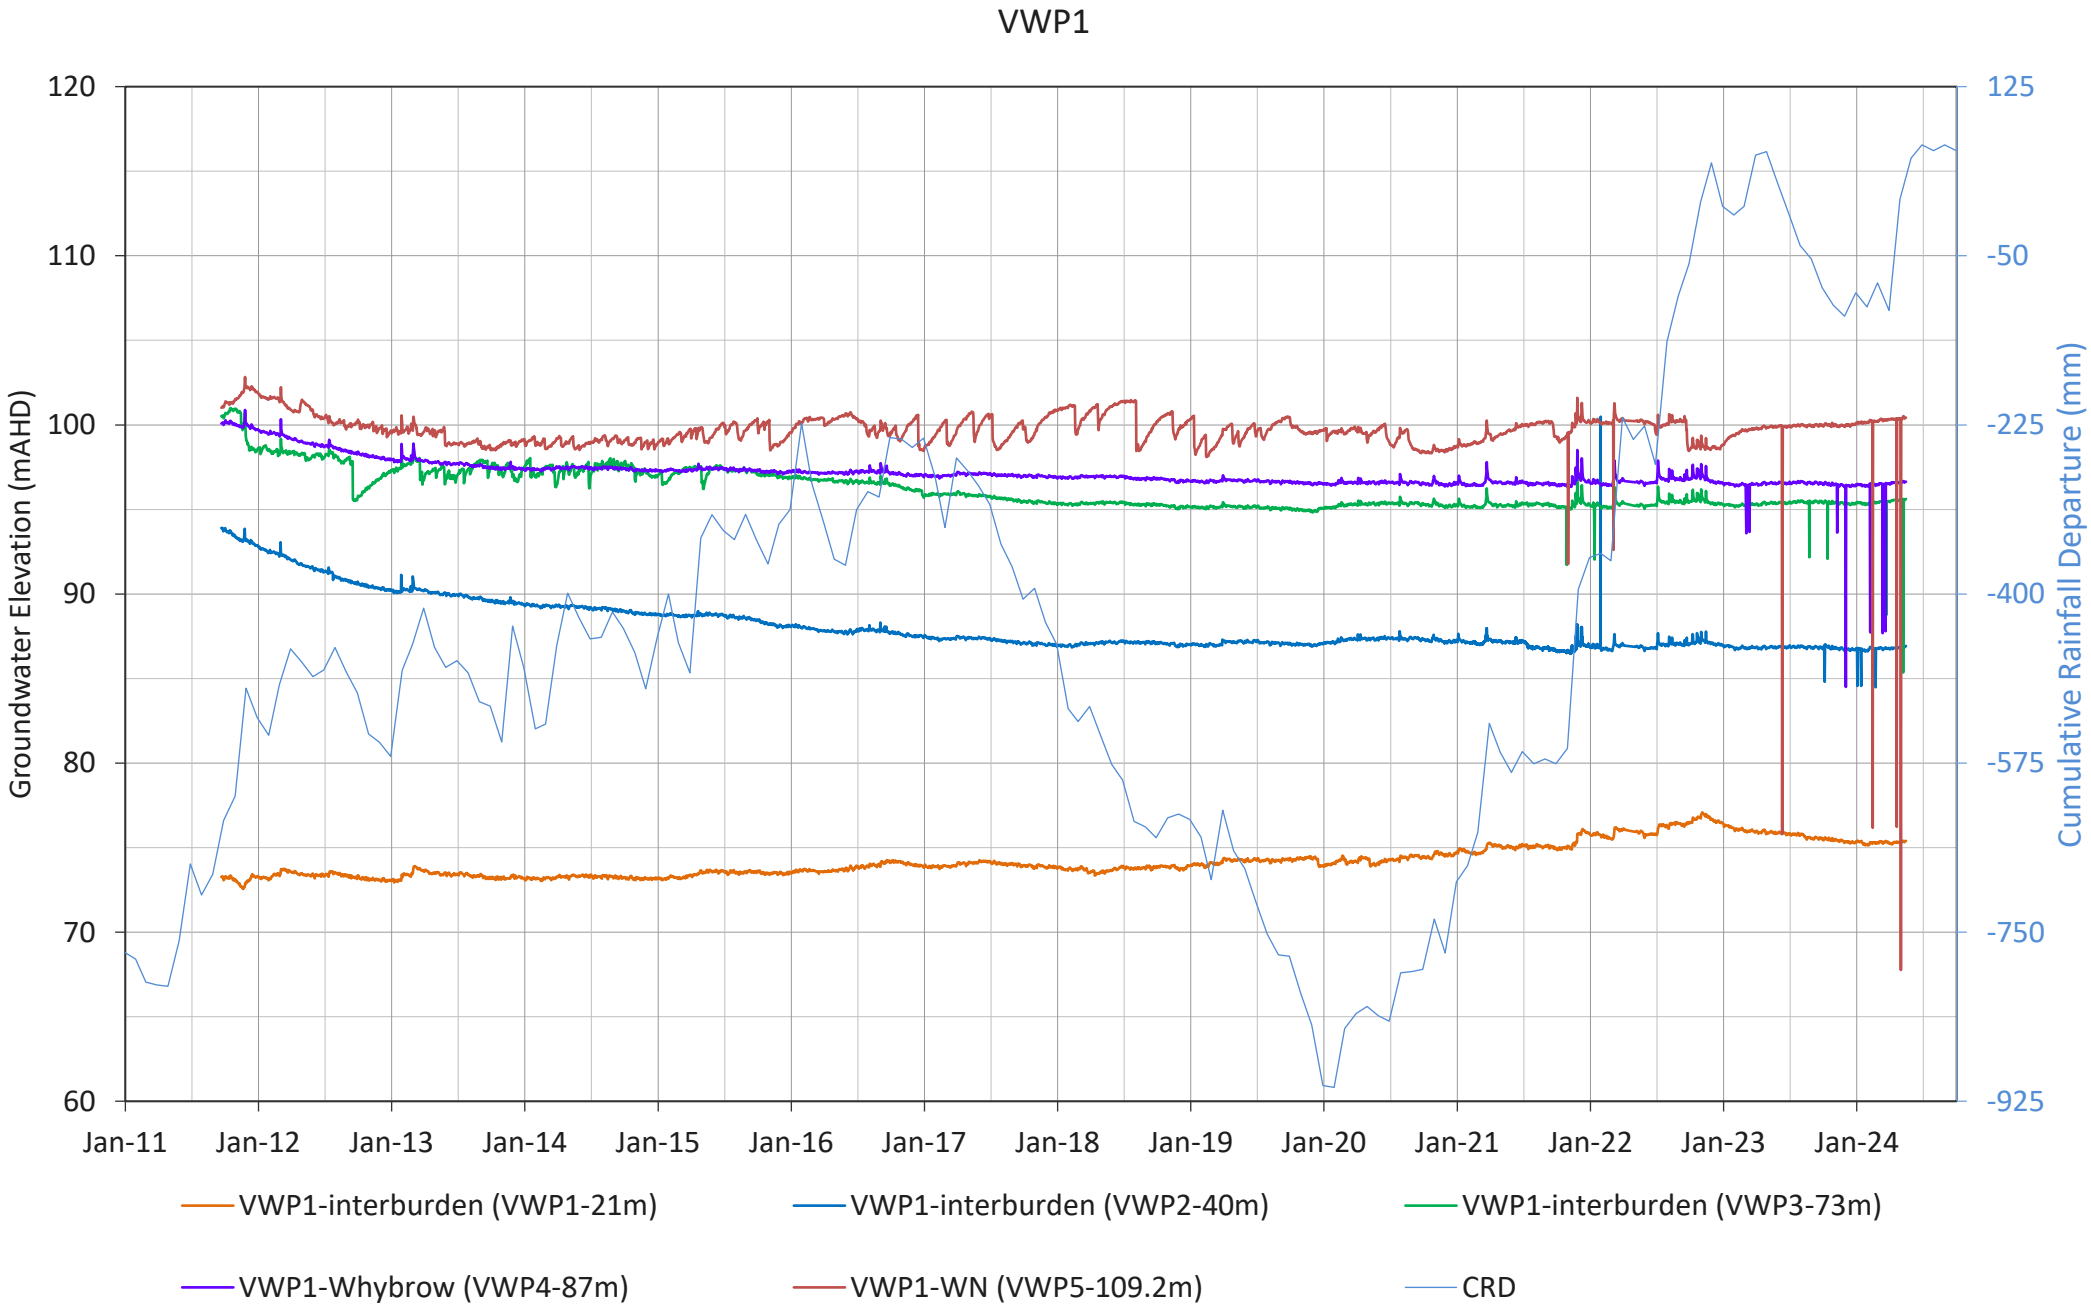
VWP1
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
120
110
100
90
80
70
60
125
-50
-225
-400
-575
-750
-925
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
VWP1-interburden (VWP1-21m)
VWP1-interburden (VWP2-40m)
VWP1-interburden (VWP3-73m)
VWP1-Whybrow (VWP4-87m)
VWP1-WN (VWP5-109.2m)
CRD

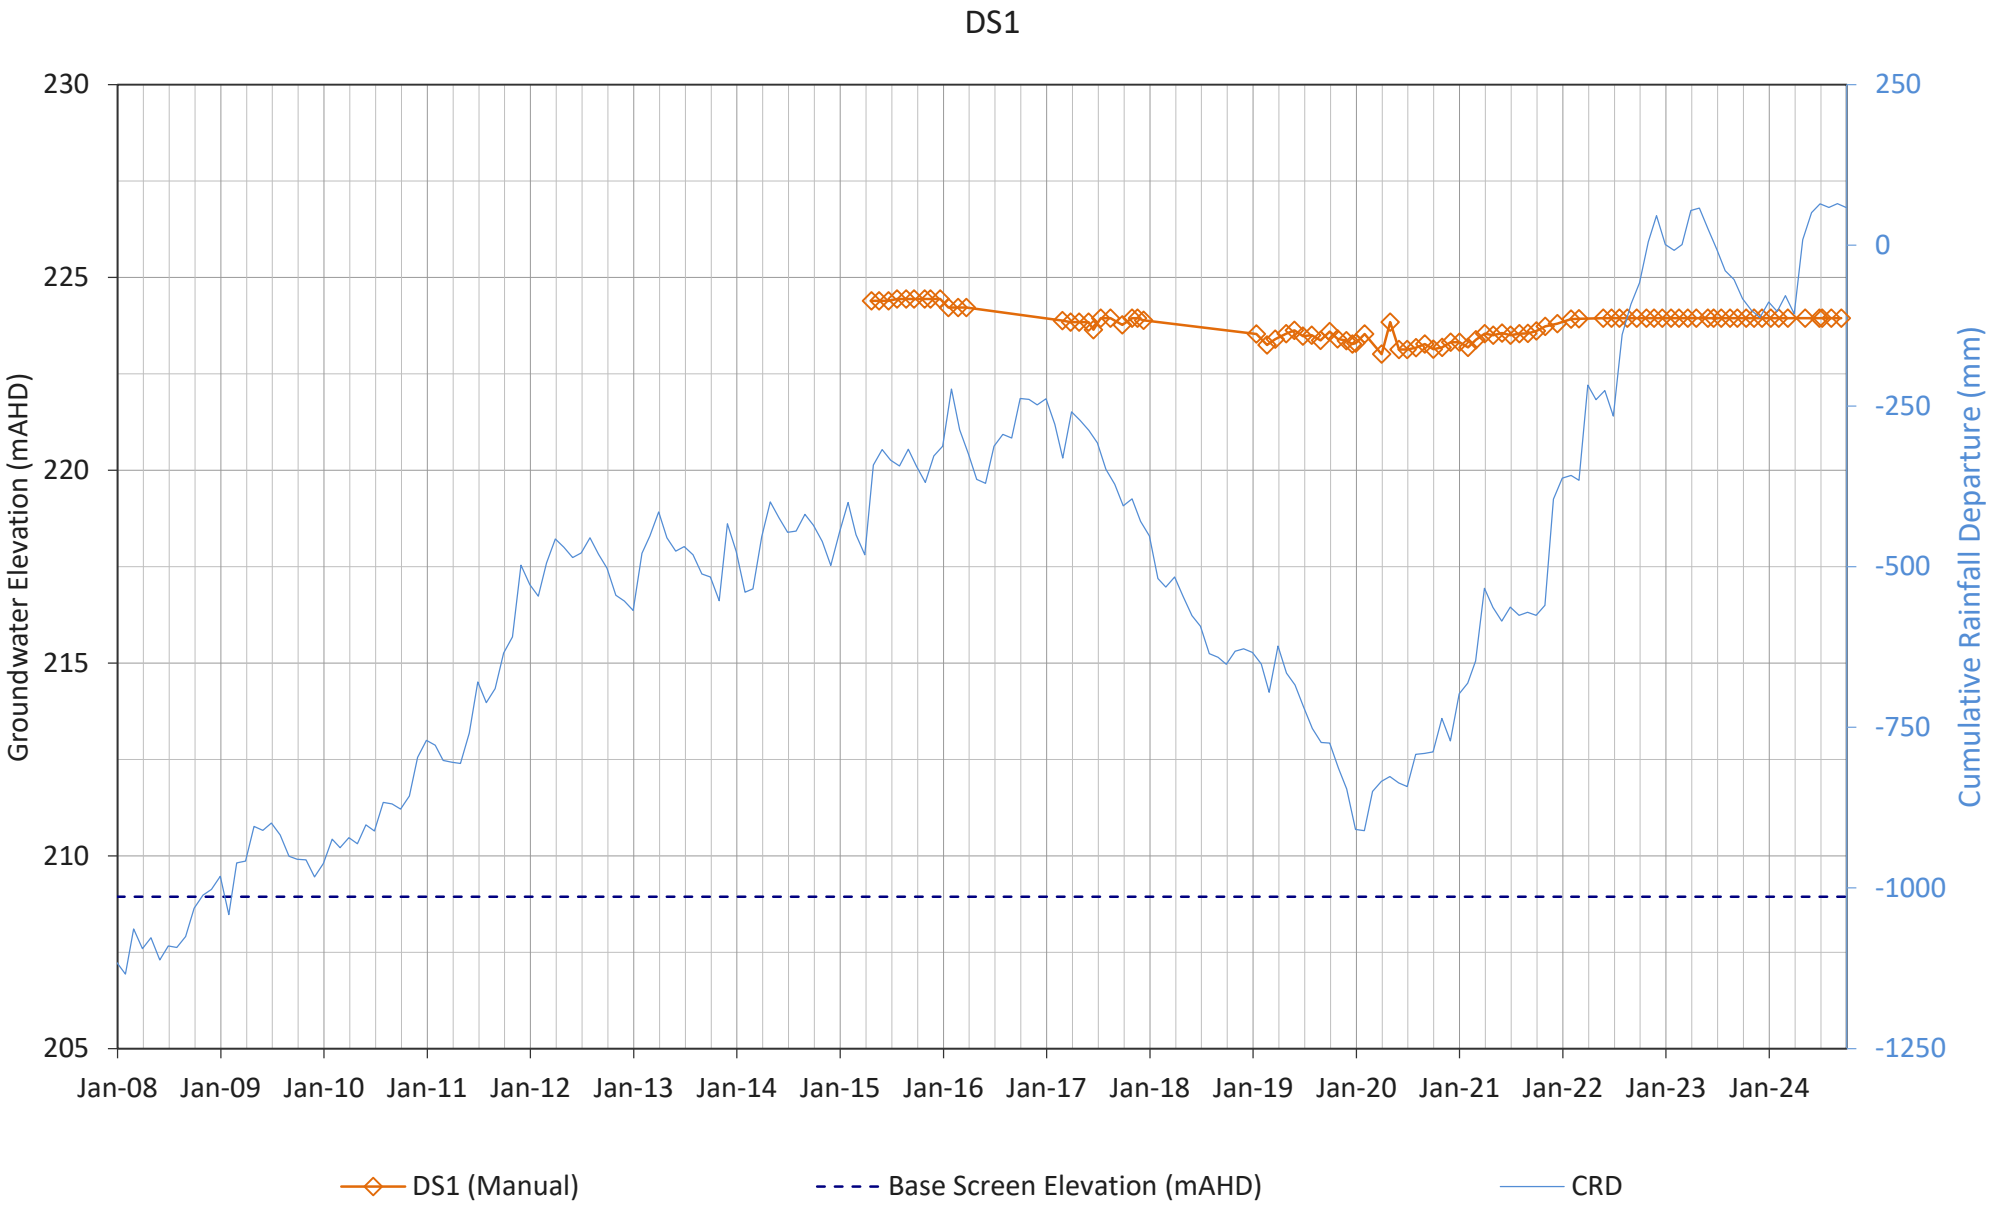
DS1
Groundwater Elevation (mAHD)
230
225
220
215
210
205
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
DS1 (Manual)
Base Screen Elevation (mAHD)
CRD

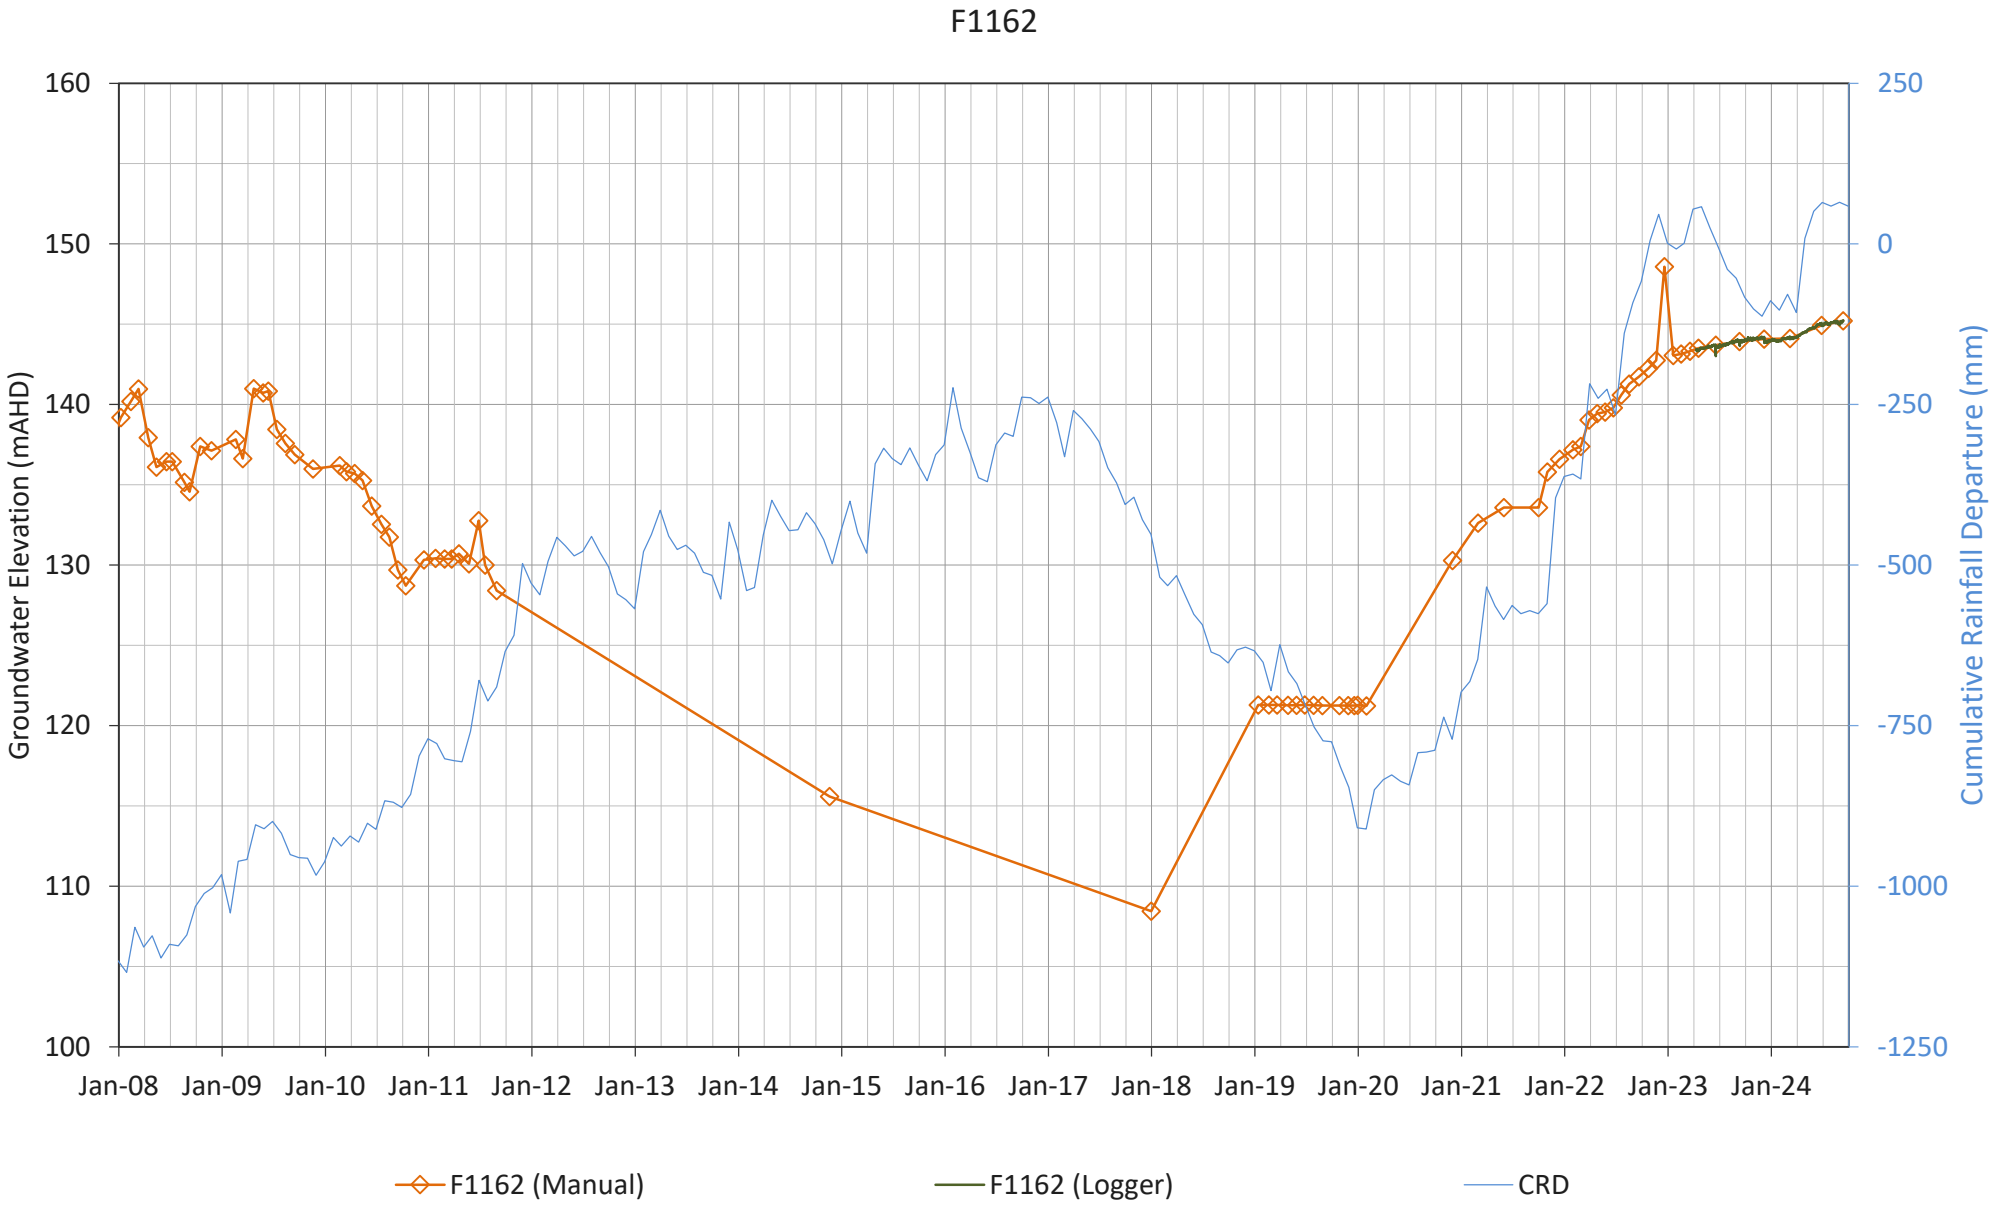
F1162
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
160
150
140
130
120
110
100
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
F1162 (Manual)
F1162 (Logger)
CRD

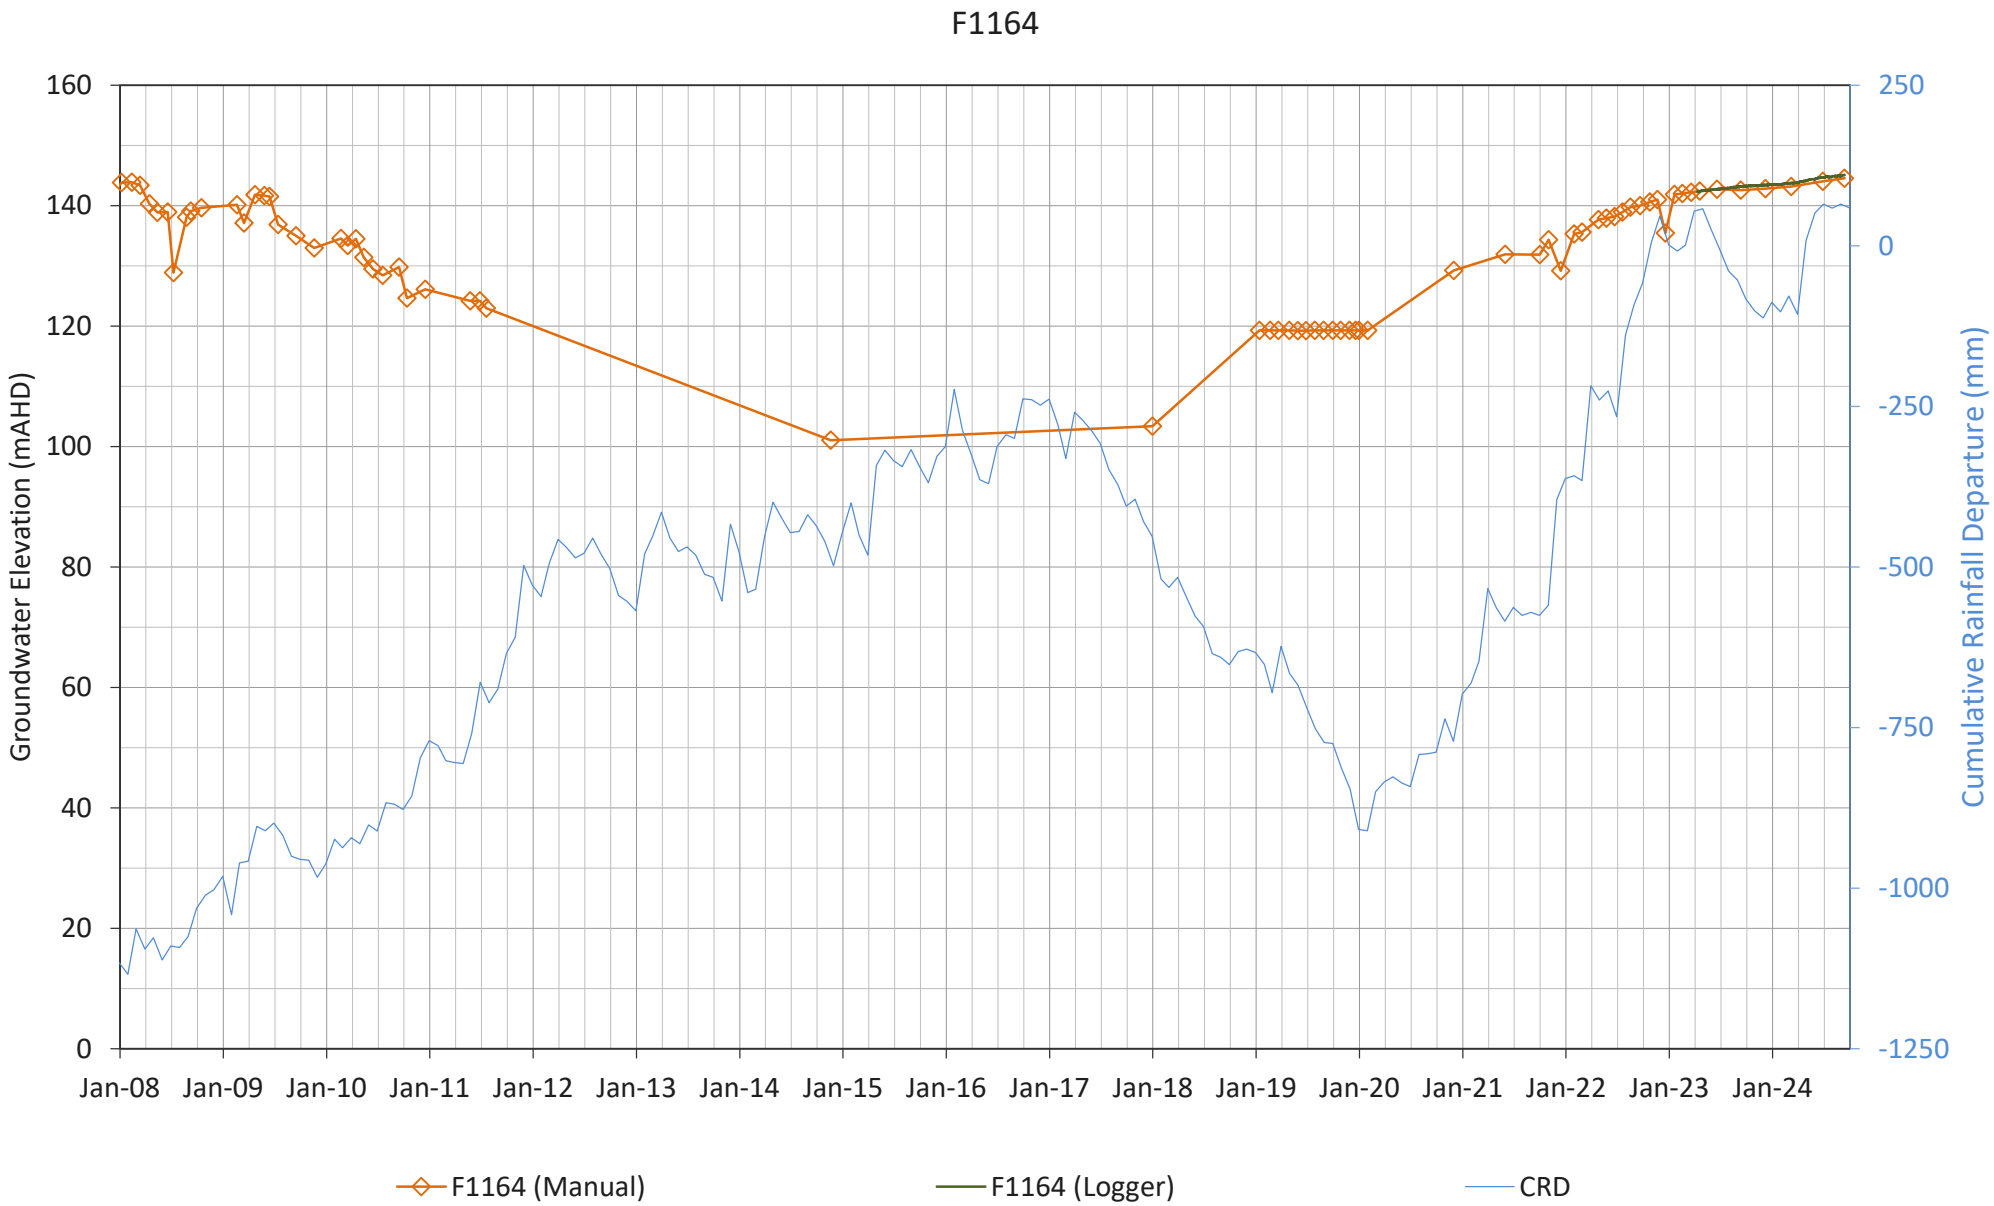
F1164
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
160
140
120
100
80
60
40
20
0
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
F1164 (Manual)
F1164 (Logger)
CRD

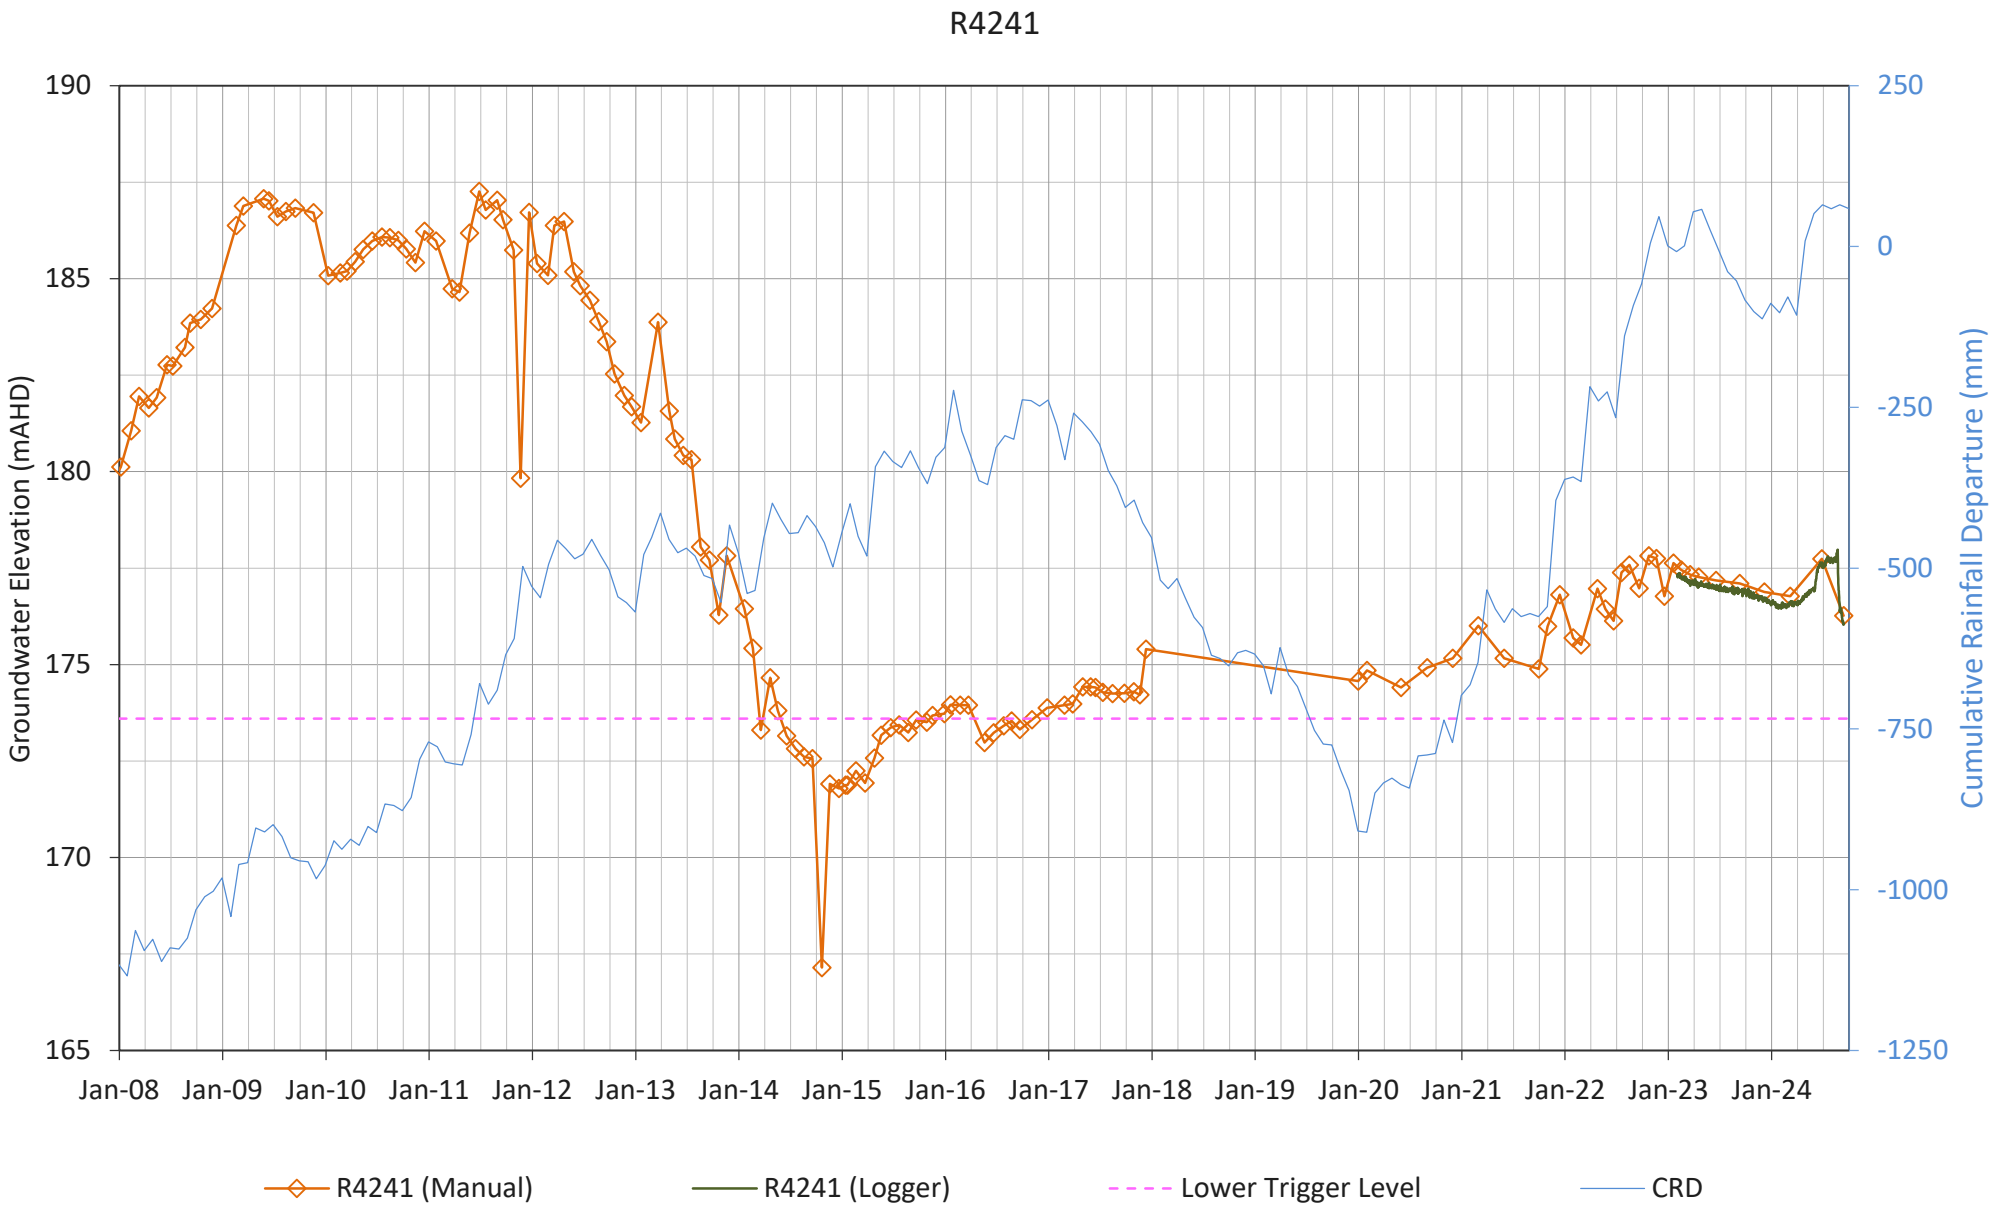
R4241
190
185
180
175
170
165
Groundwater Elevation (mAHD)
250
0
-250
-500
-750
-1000
-1250
Cumulative Rainfall Departure (mm)
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
R4241 (Manual)
R4241 (Logger)
Lower Trigger Level
CRD

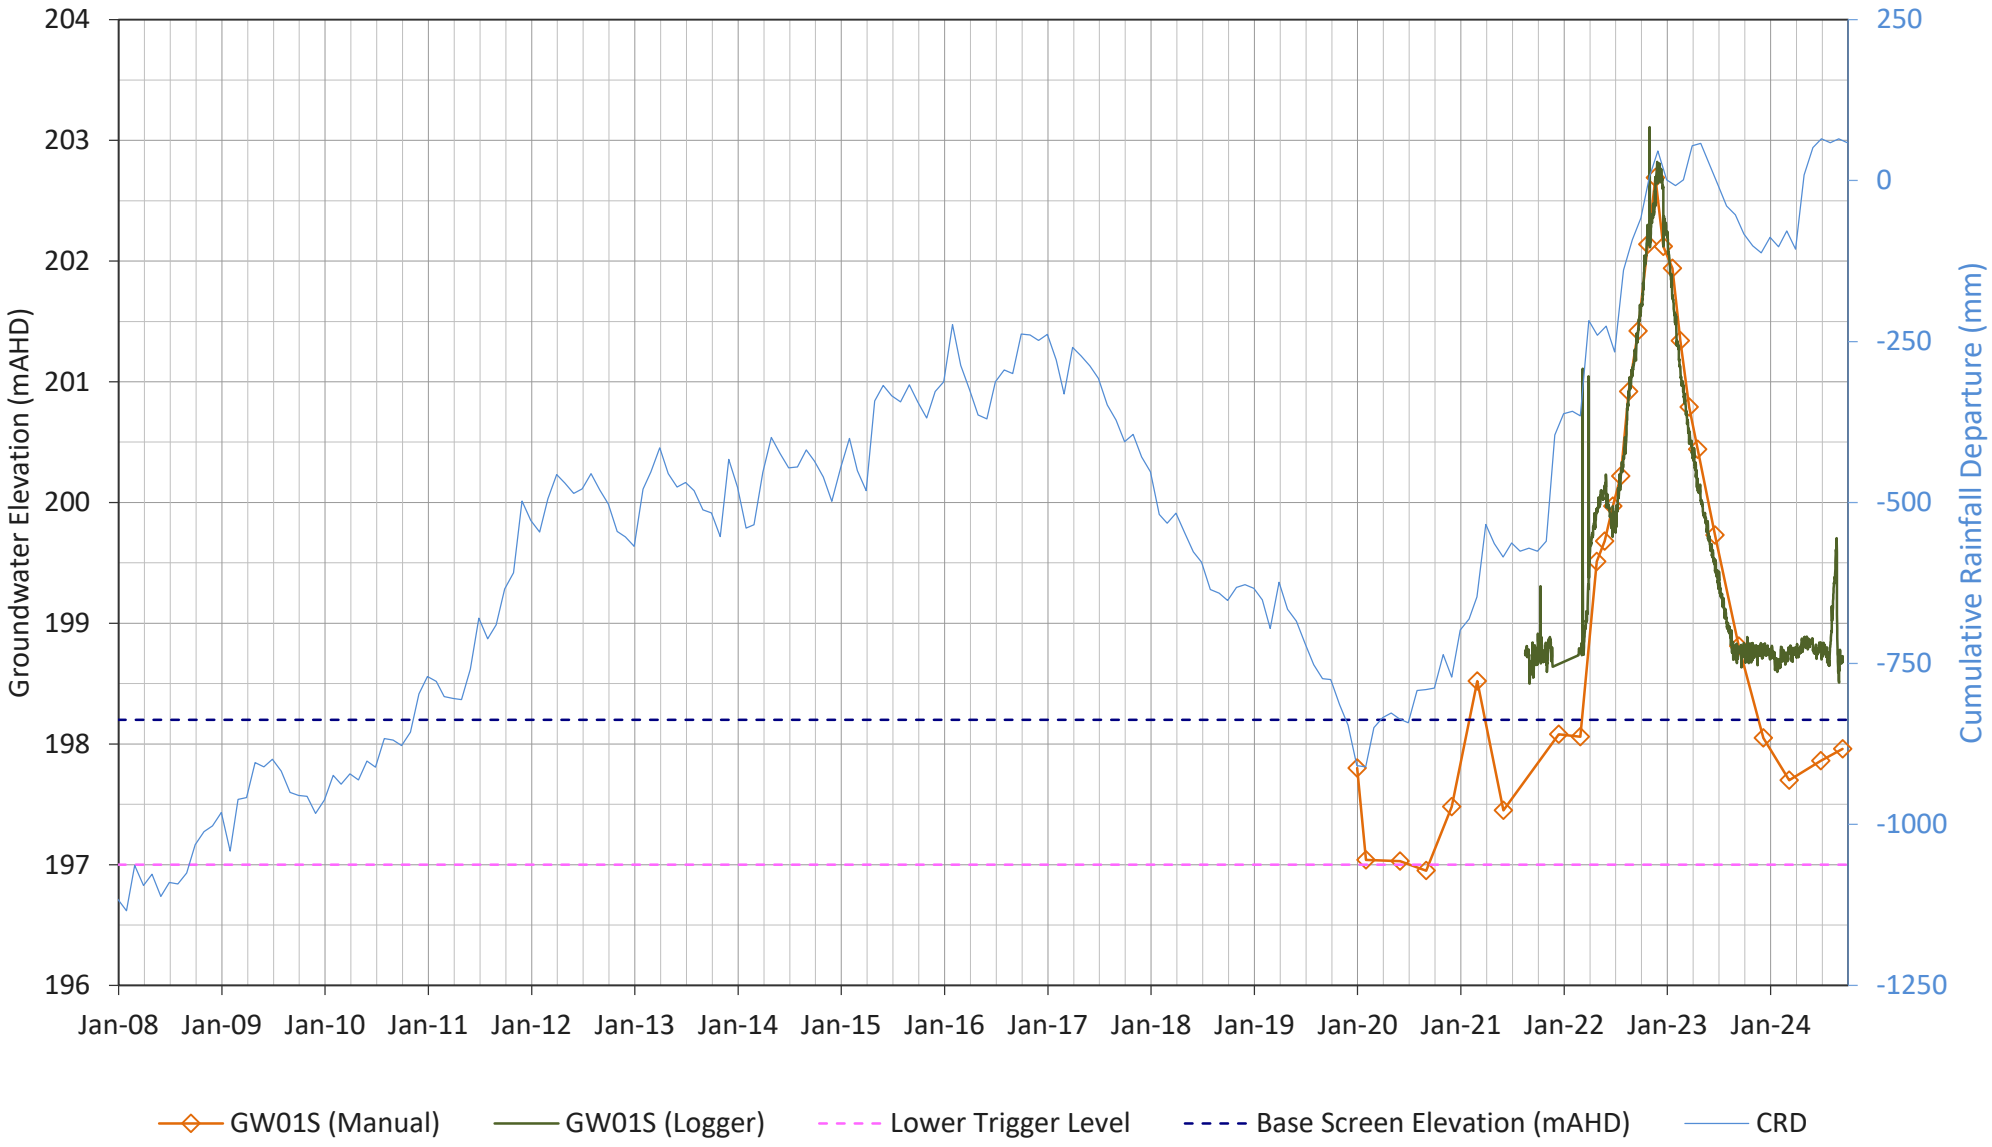
GW01S
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
204
203
202
201
200
199
198
197
196
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
GW01S (Manual)
GW01S (Logger)
Lower Trigger Level
Base Screen Elevation (mAHD)
CRD

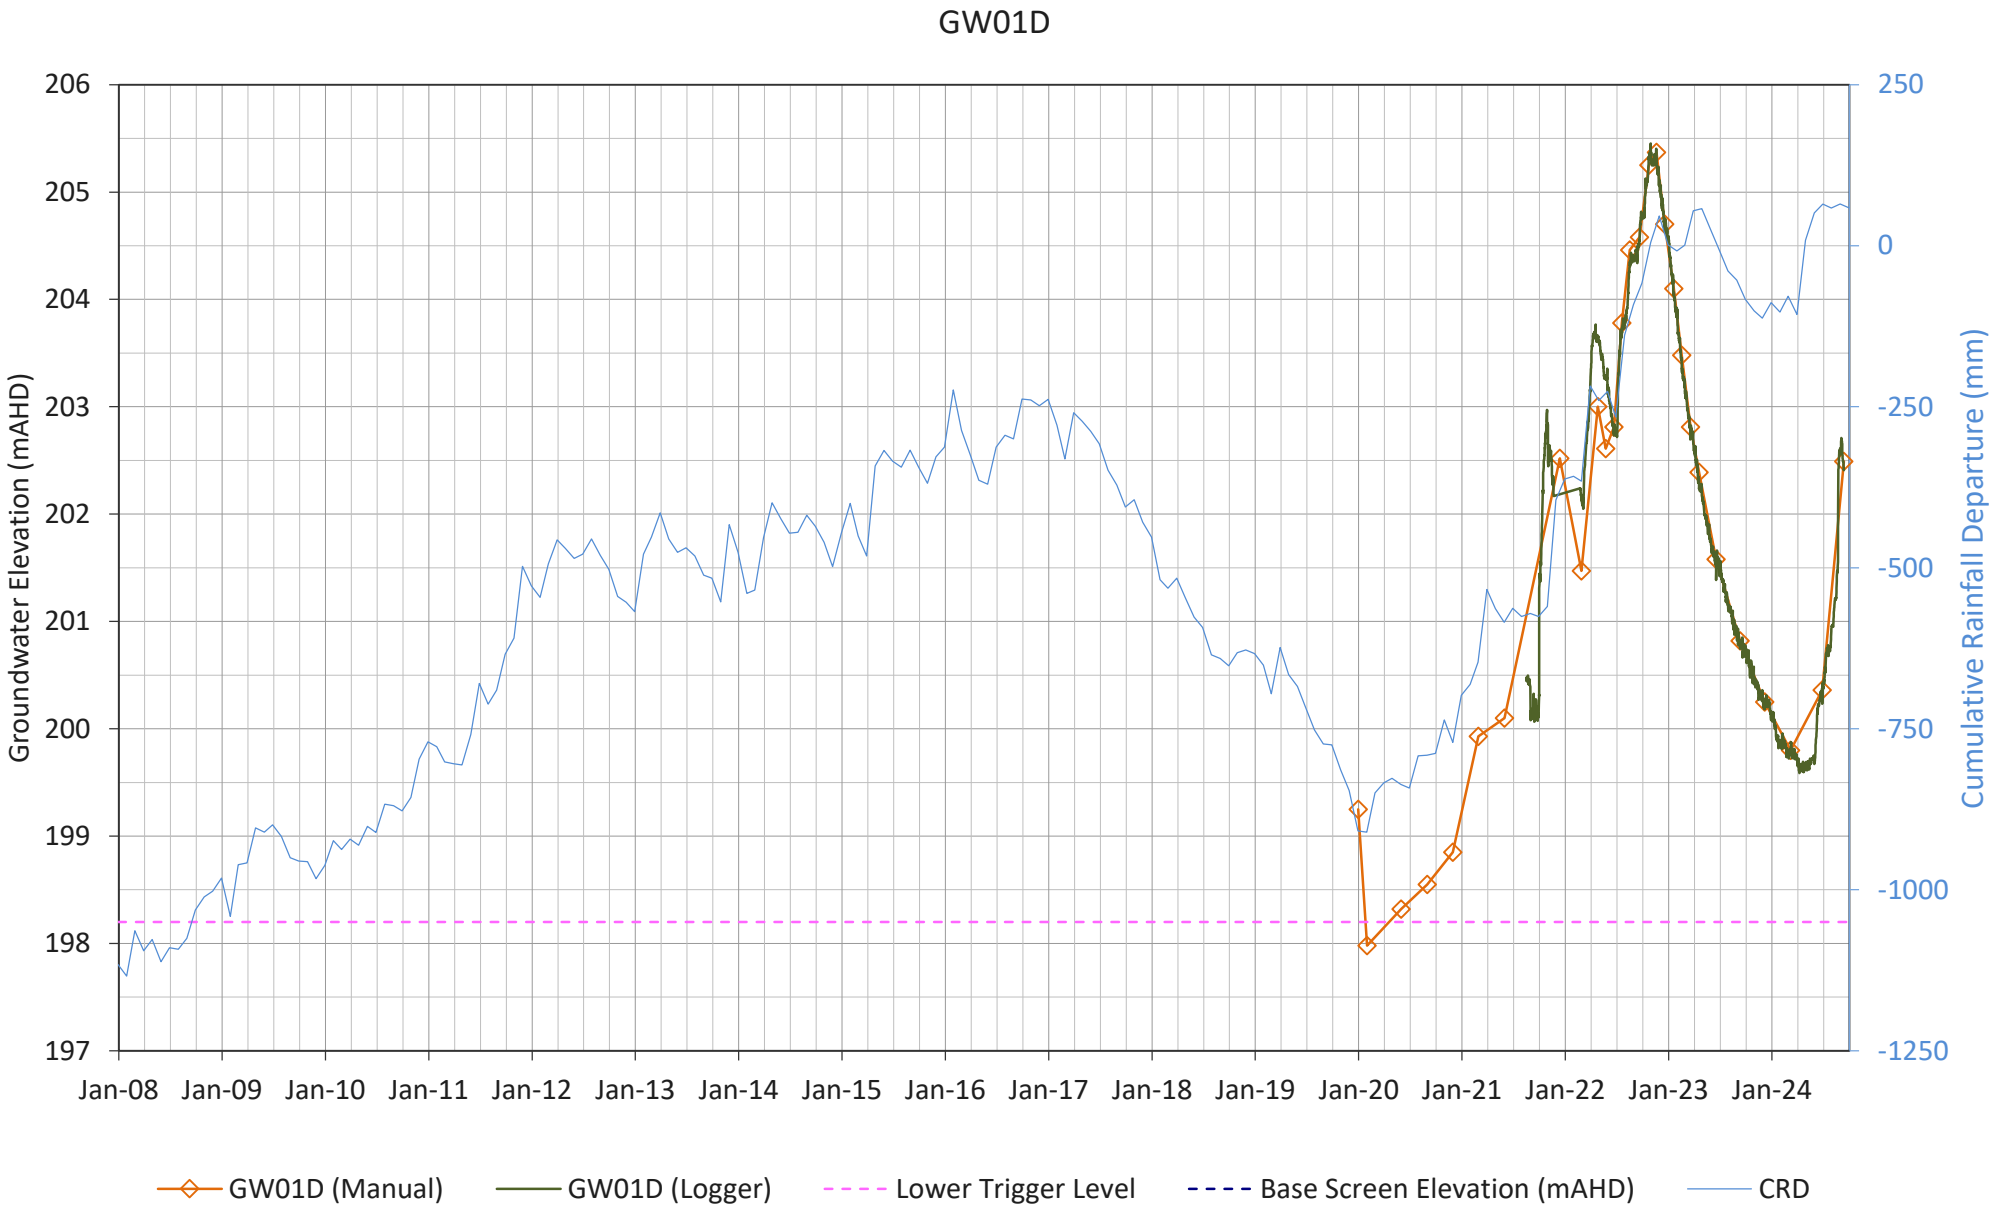
GW01D
Groundwater Elevation (mAHD)
206
205
204
203
202
201
200
199
198
197
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
GW01D (Manual)
GW01D (Logger)
Lower Trigger Level
Base Screen Elevation (mAHD)
CRD

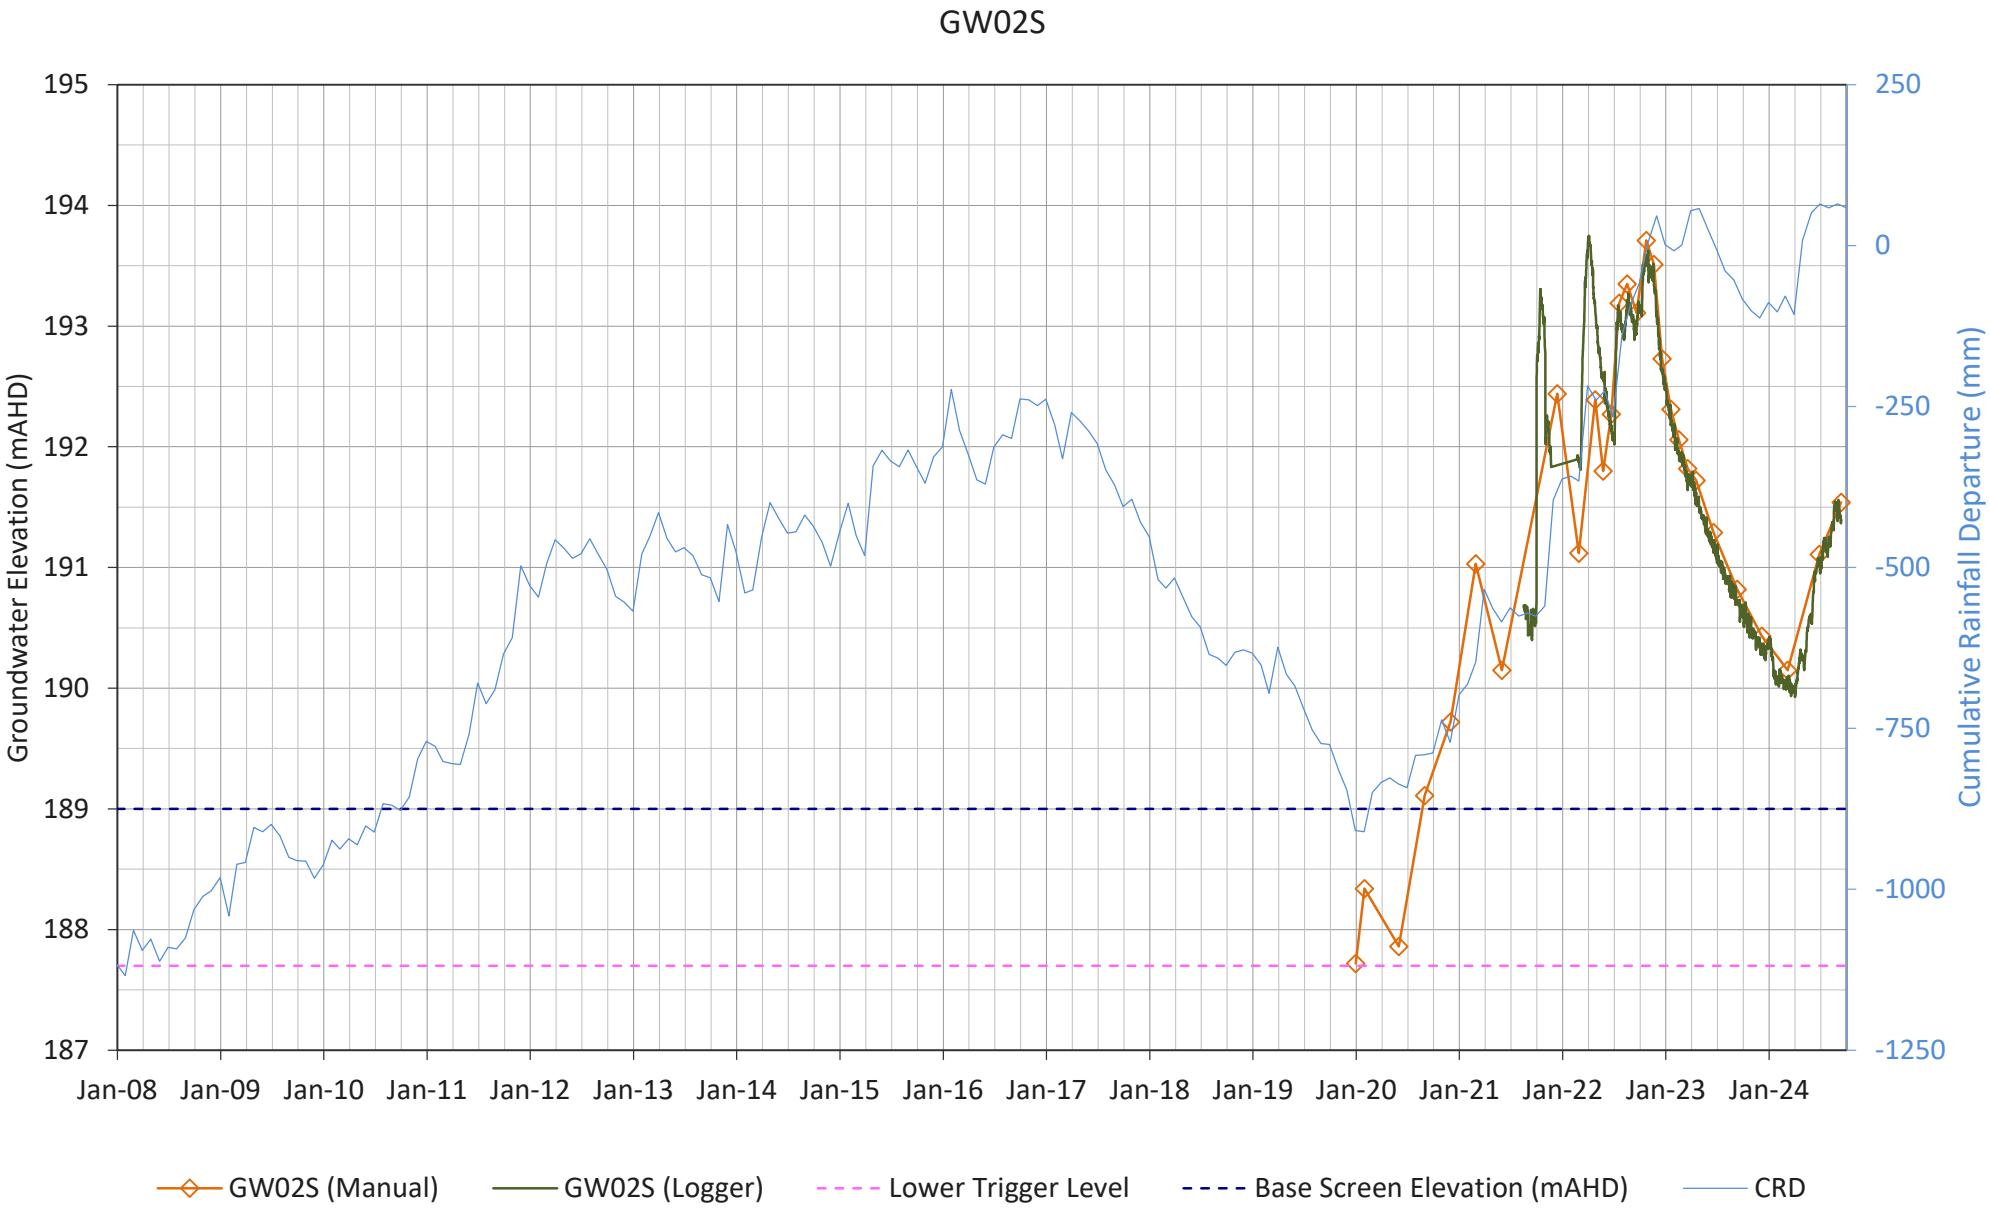
GW02S
Groundwater Elevation (mAHD)
195
194
193
192
191
190
189
188
187
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
GW02S (Manual)
GW02S (Logger)
Lower Trigger Level
Base Screen Elevation (mAHD)
CRD

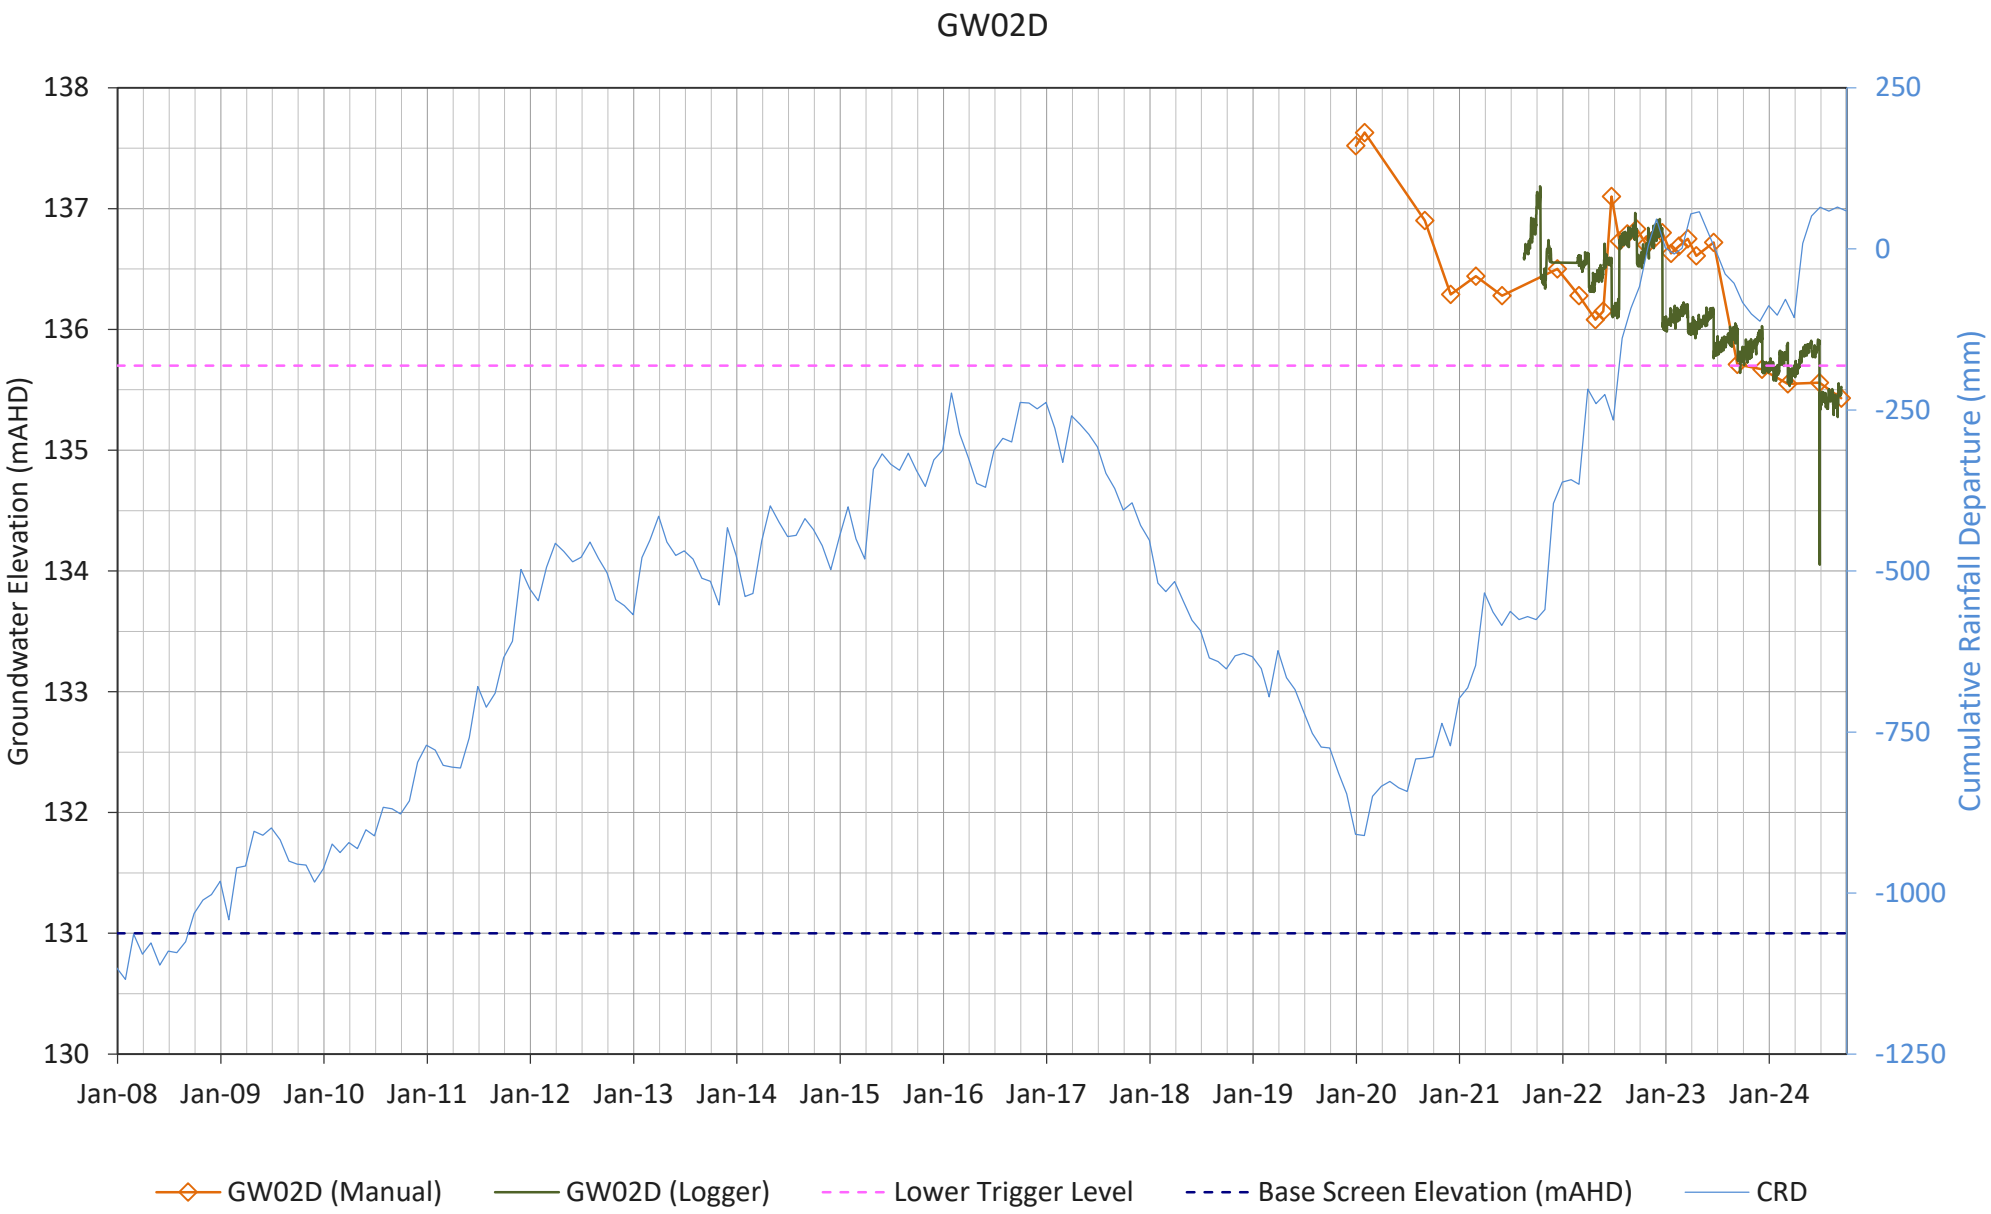
GW02D
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
138
137
136
135
134
133
132
131
130
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
GW02D (Manual)
GW02D (Logger)
Lower Trigger Level
Base Screen Elevation (mAHD)
CRD

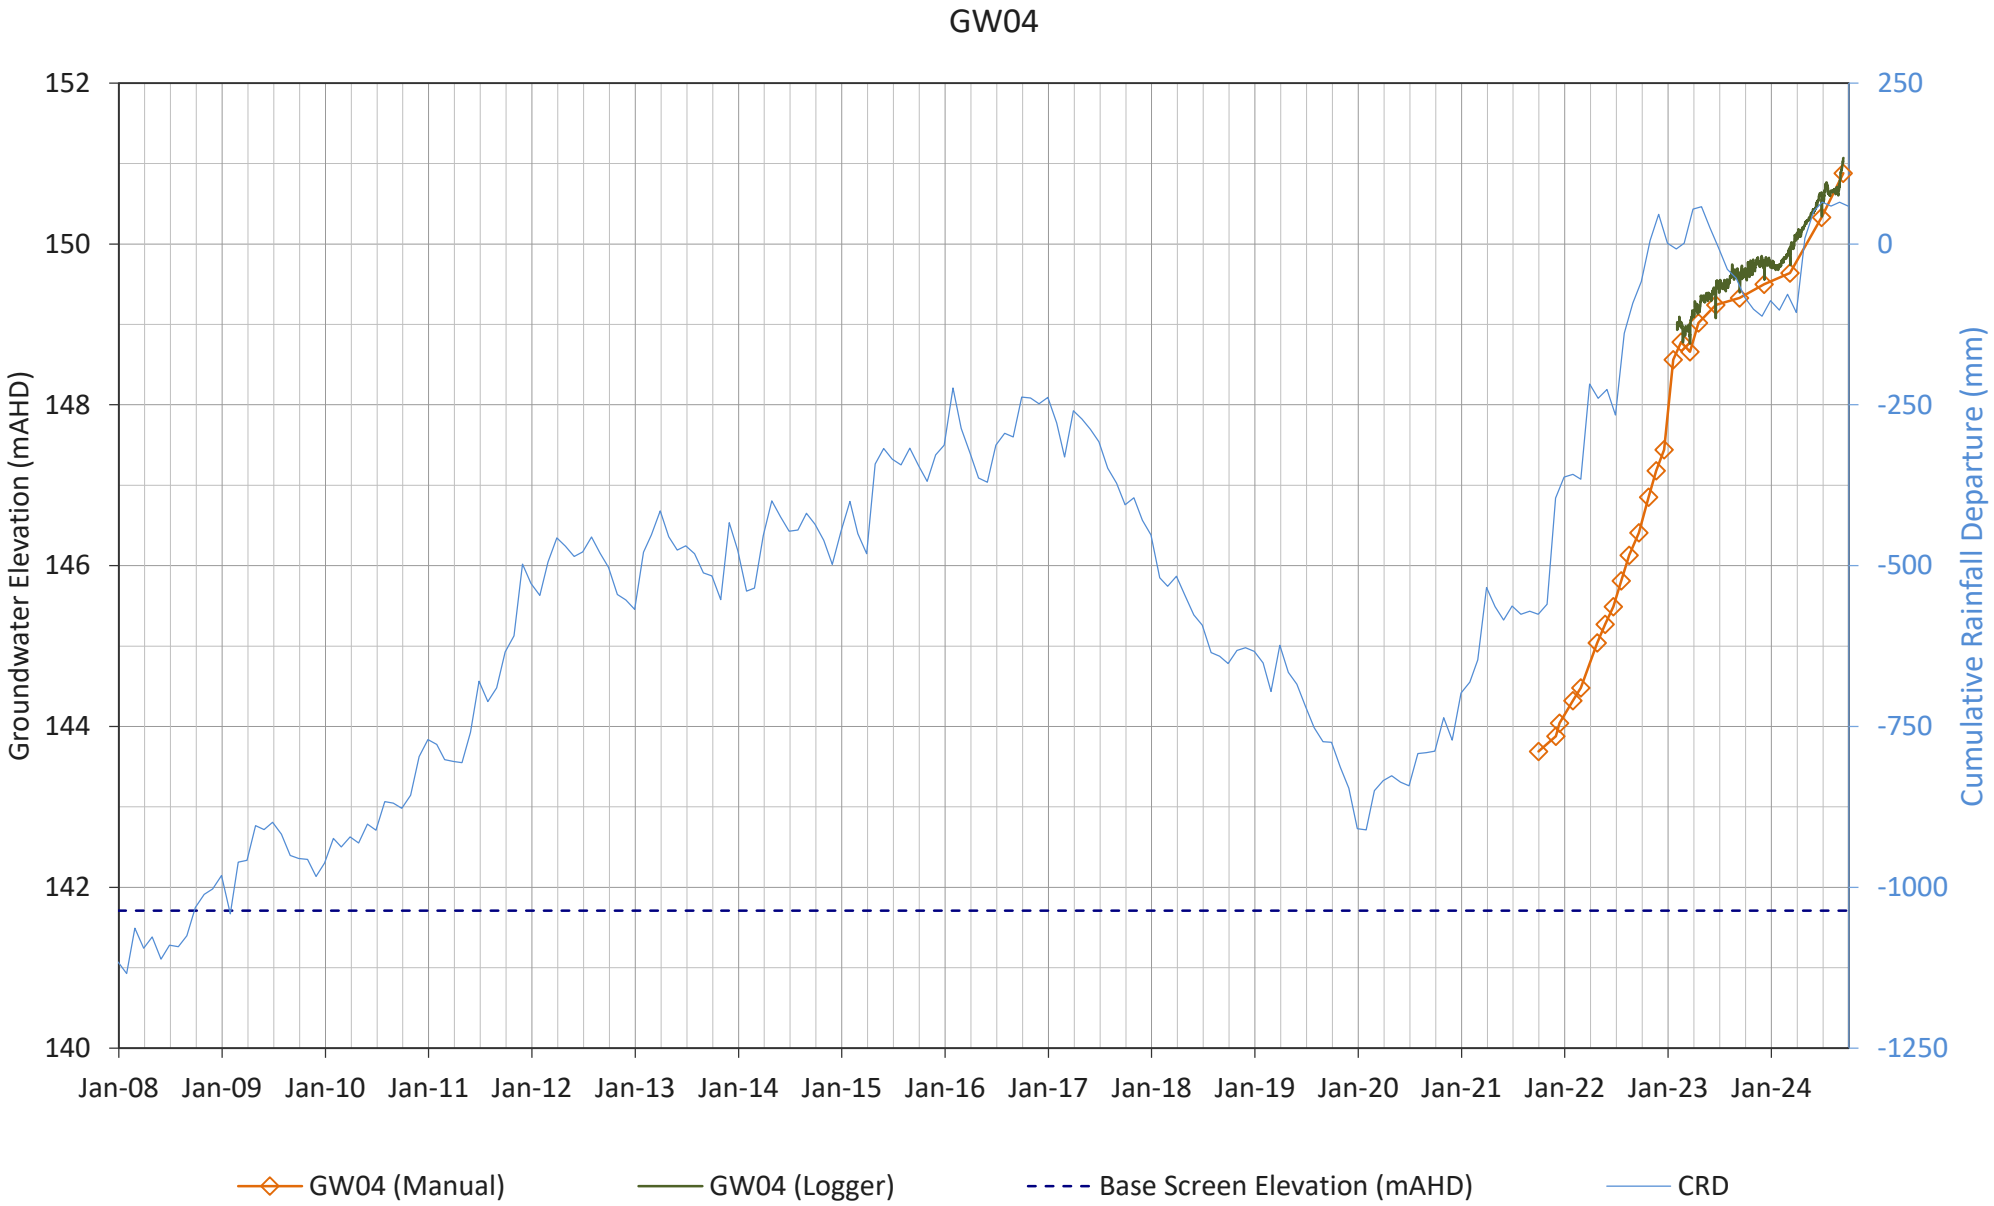
GW04
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
152
150
148
146
144
142
140
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
GW04 (Manual)
GW04 (Logger)
Base Screen Elevation (mAHD)
CRD

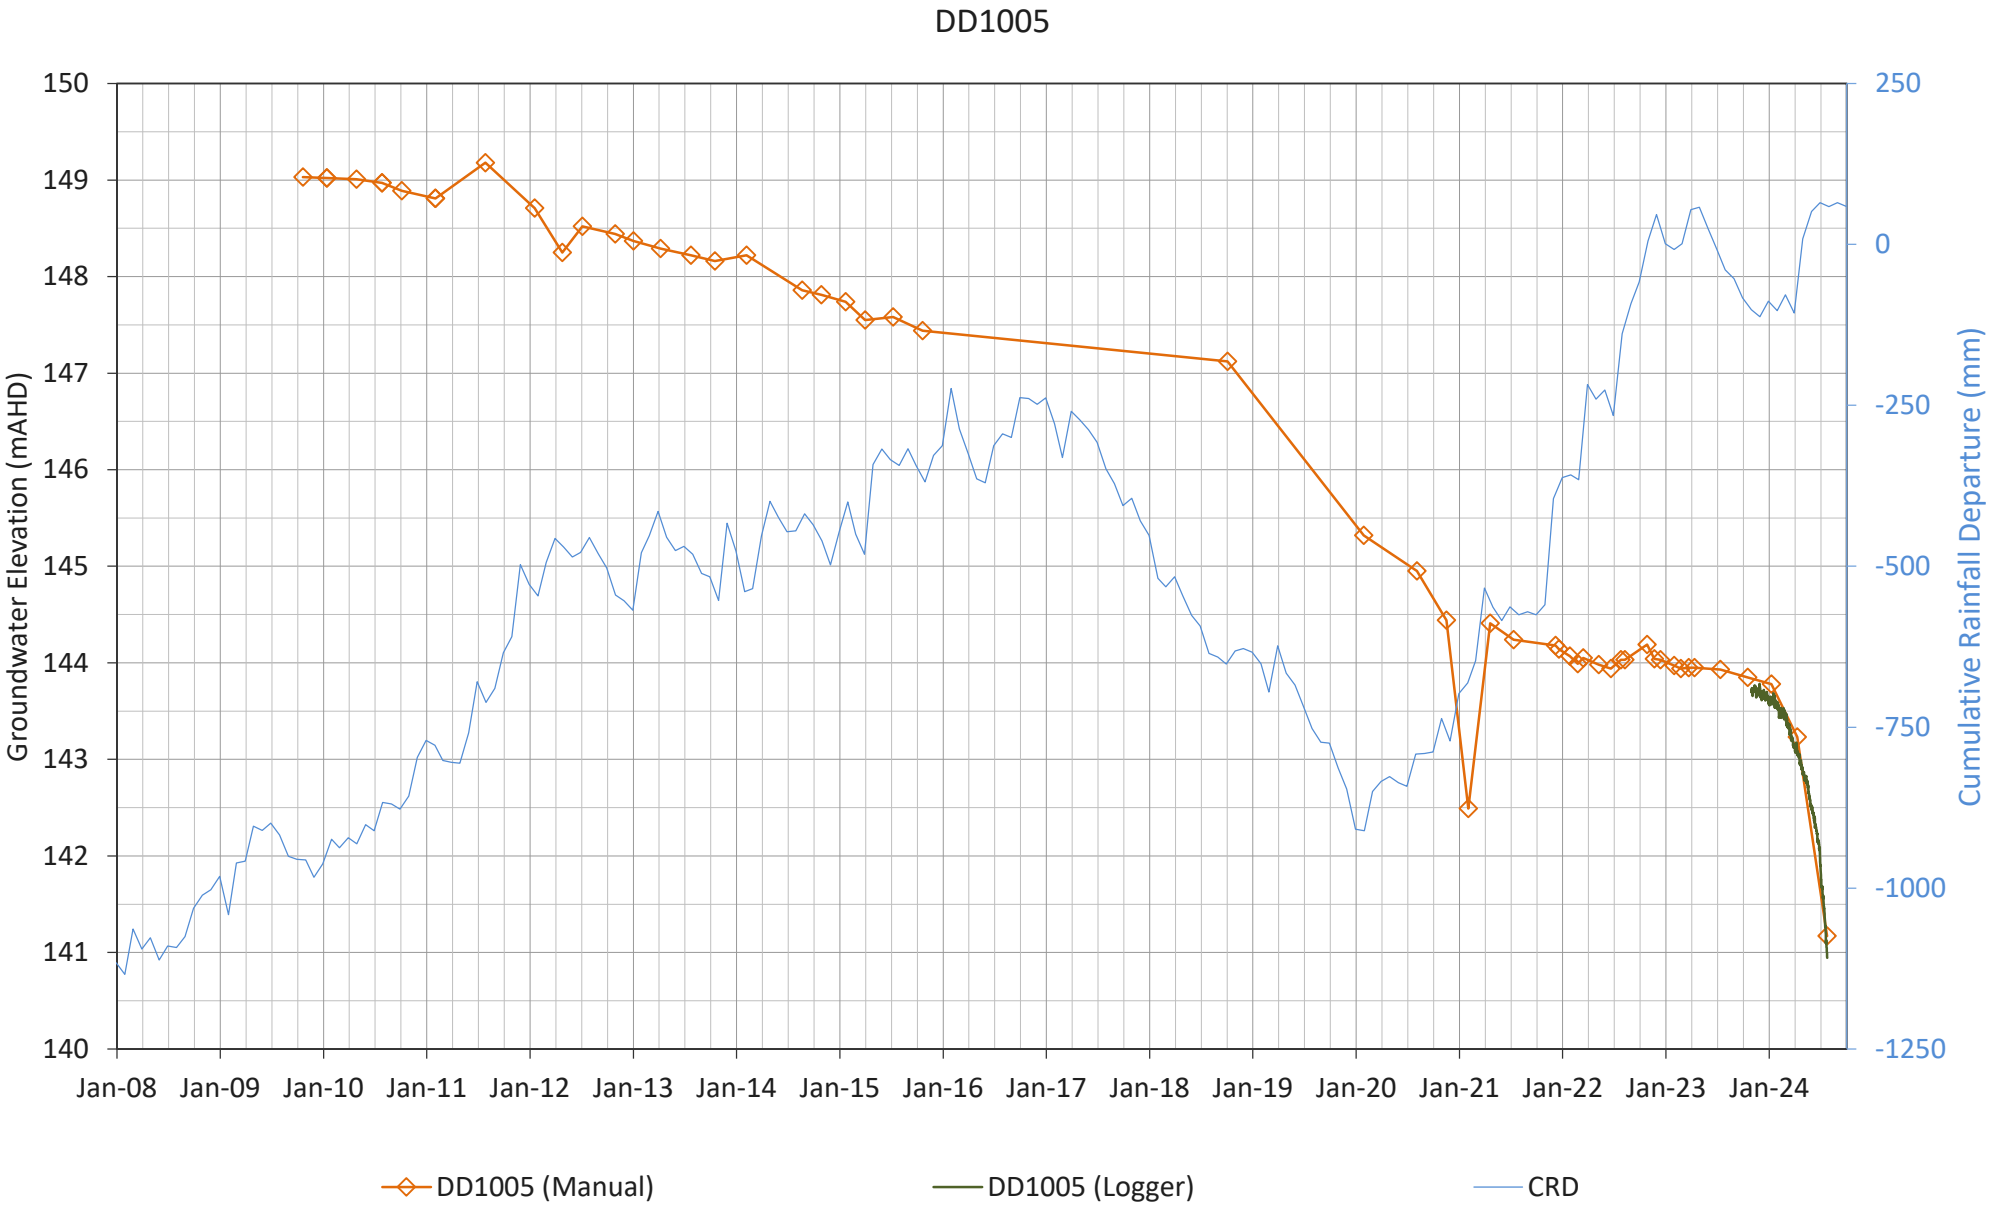
DD1005
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
150
149
148
147
146
145
144
143
142
141
140
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
DD1005 (Manual)
DD1005 (Logger)
CRD

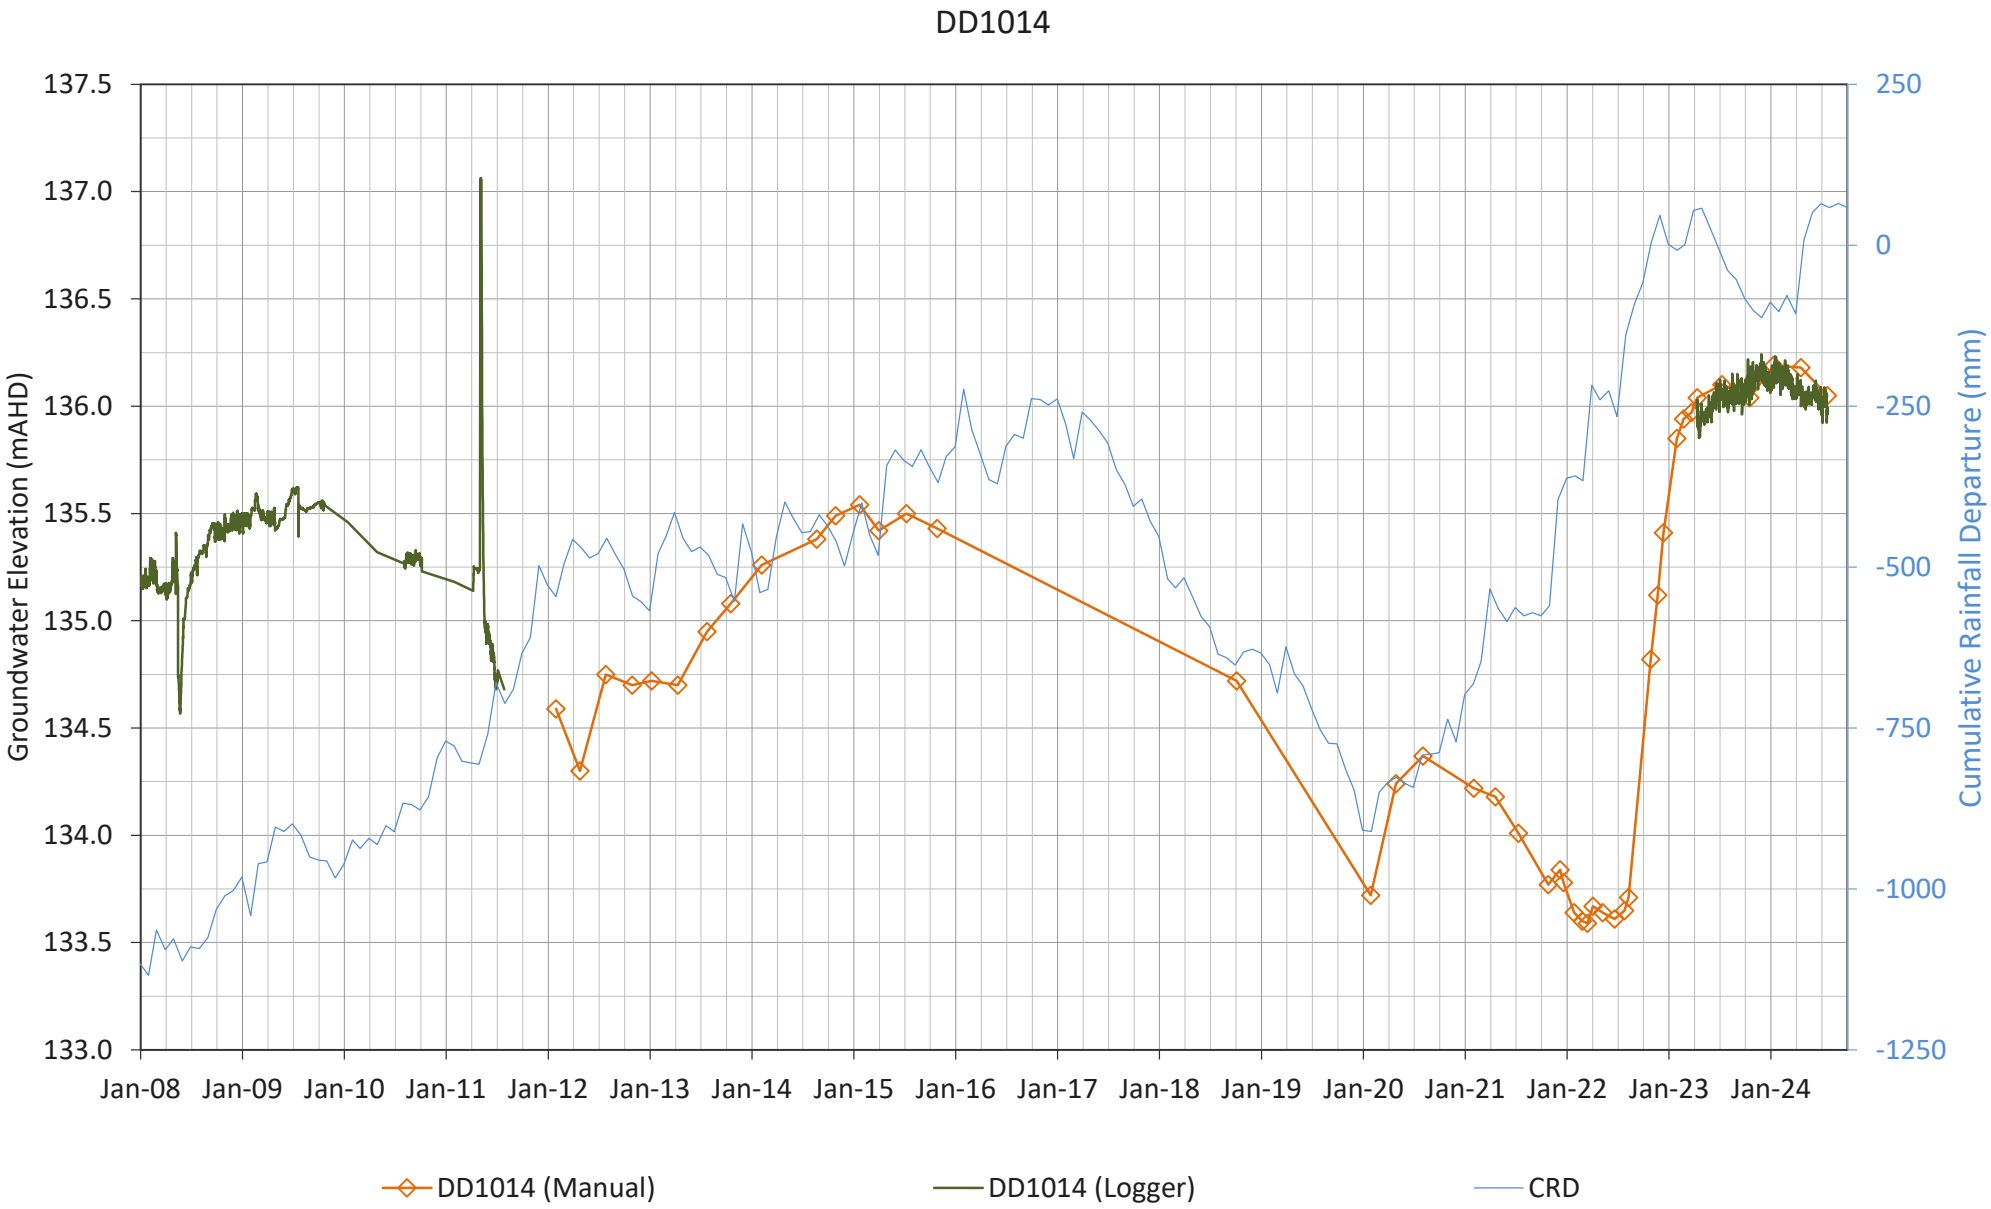
DD1014
Groundwater Elevation (mAHD)
137.5
137.0
136.5
136.0
135.5
135.0
134.5
134.0
133.5
133.0
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
DD1014 (Manual)
DD1014 (Logger)
CRD

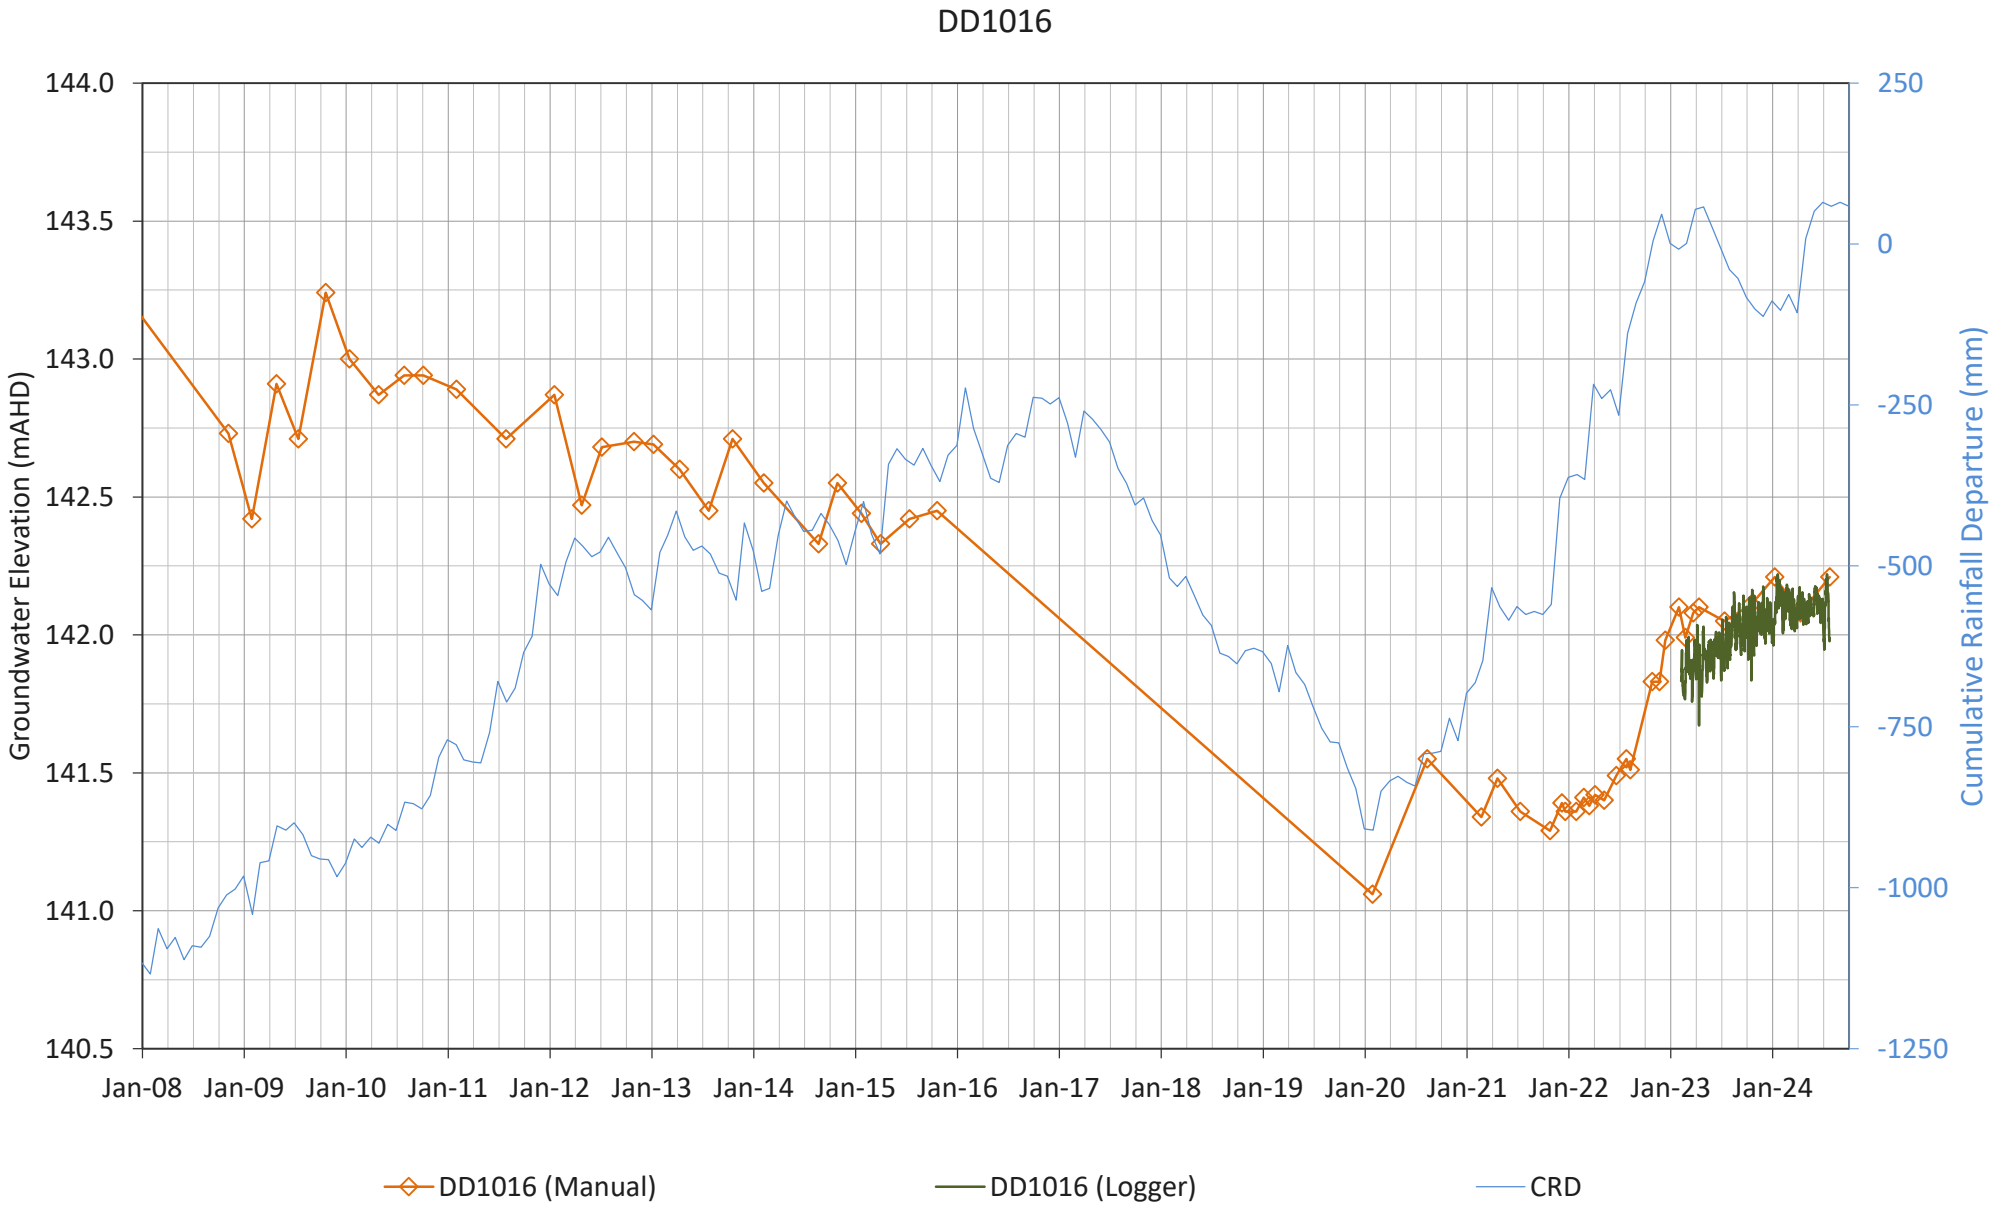
DD1016
144.0
143.5
143.0
142.5
142.0
141.5
141.0
140.5
Groundwater Elevation (mAHD)
250
0
-250
-500
-750
-1000
-1250
Cumulative Rainfall Departure (mm)
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
DD1016 (Manual)
DD1016 (Logger)
CRD

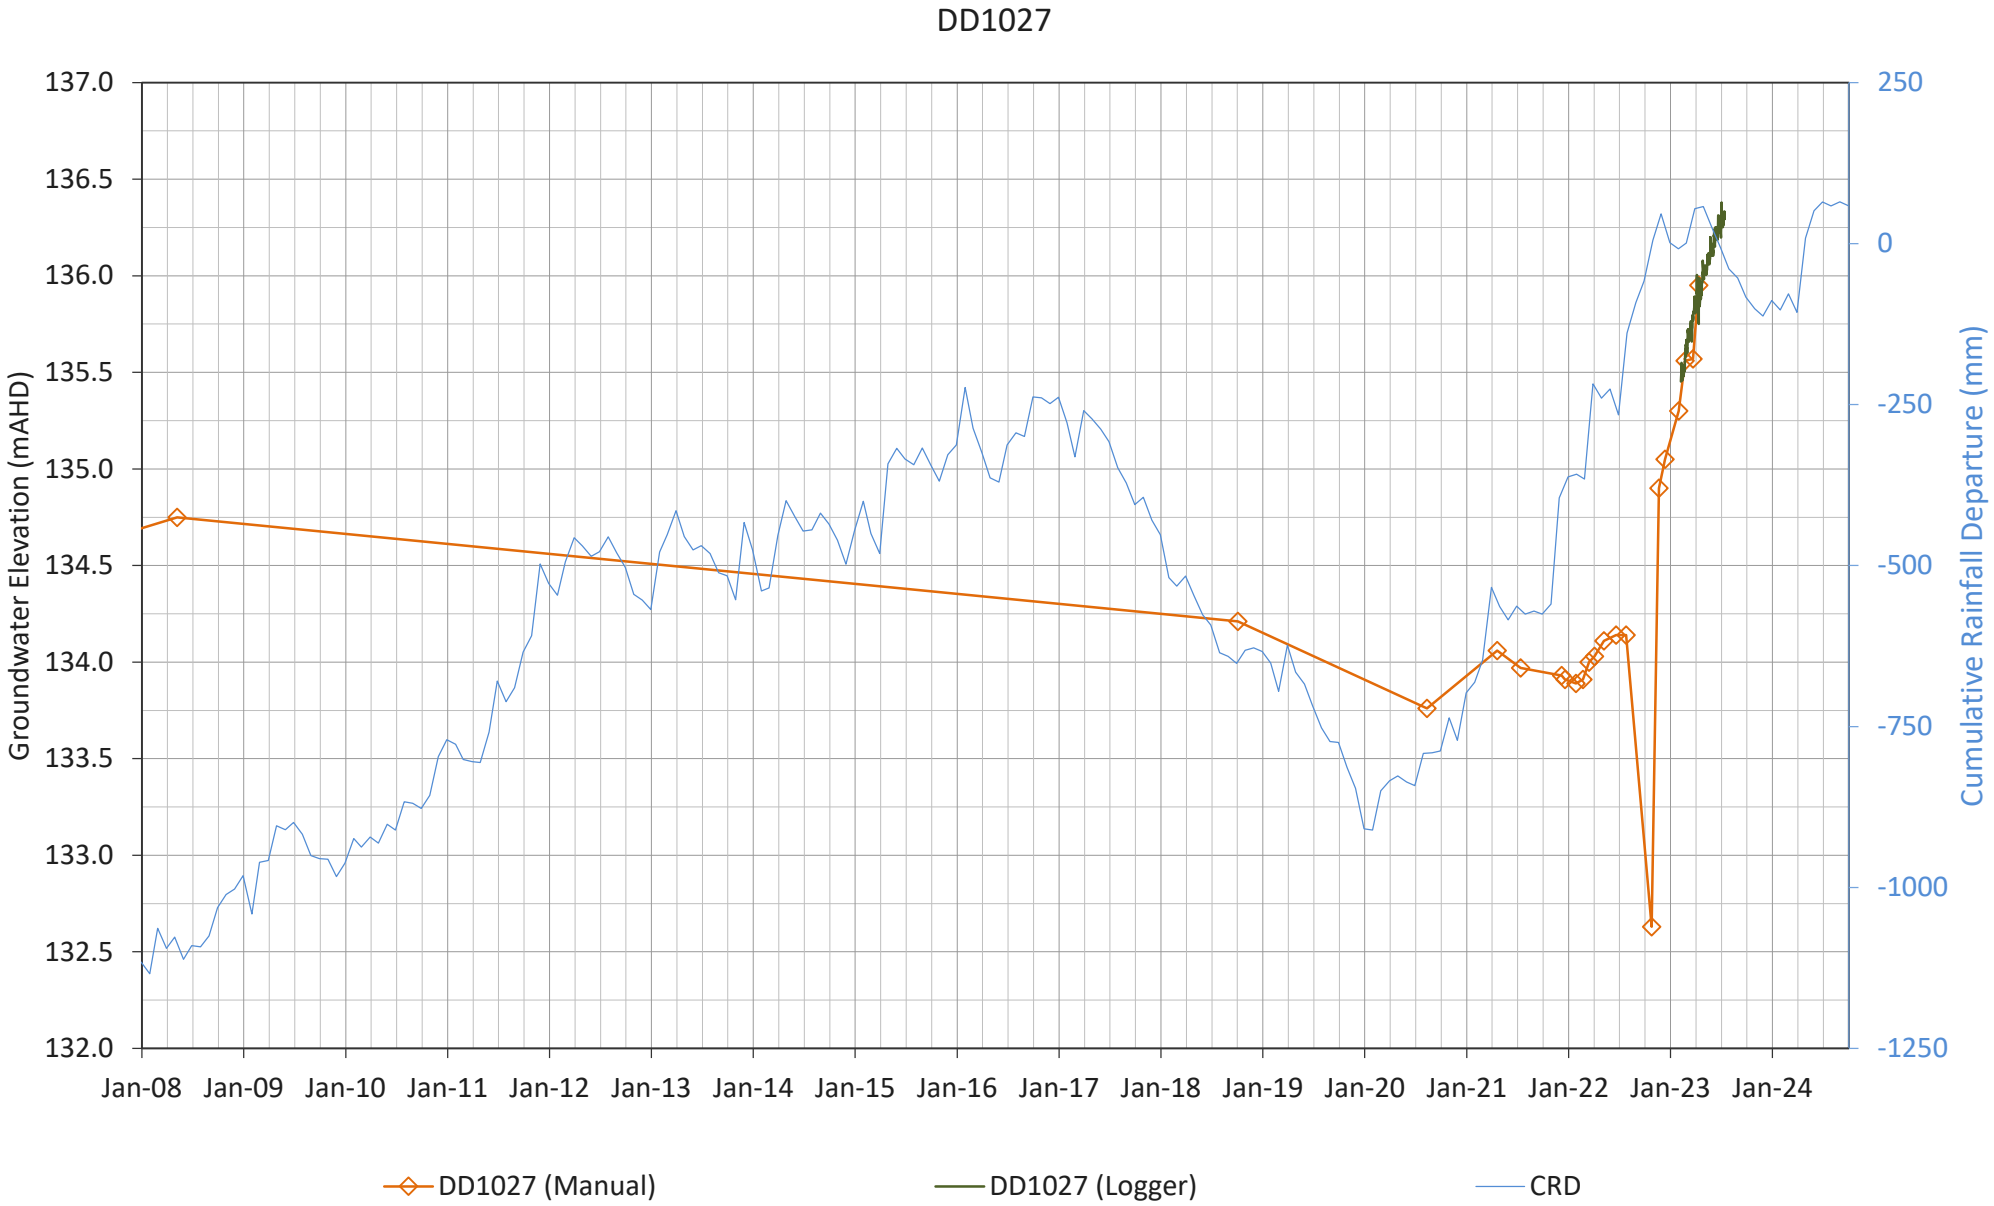
DD1027
Groundwater Elevation (mAHD)
137.0
136.5
136.0
135.5
135.0
134.5
134.0
133.5
133.0
132.5
132.0
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
DD1027 (Manual)
DD1027 (Logger)
CRD

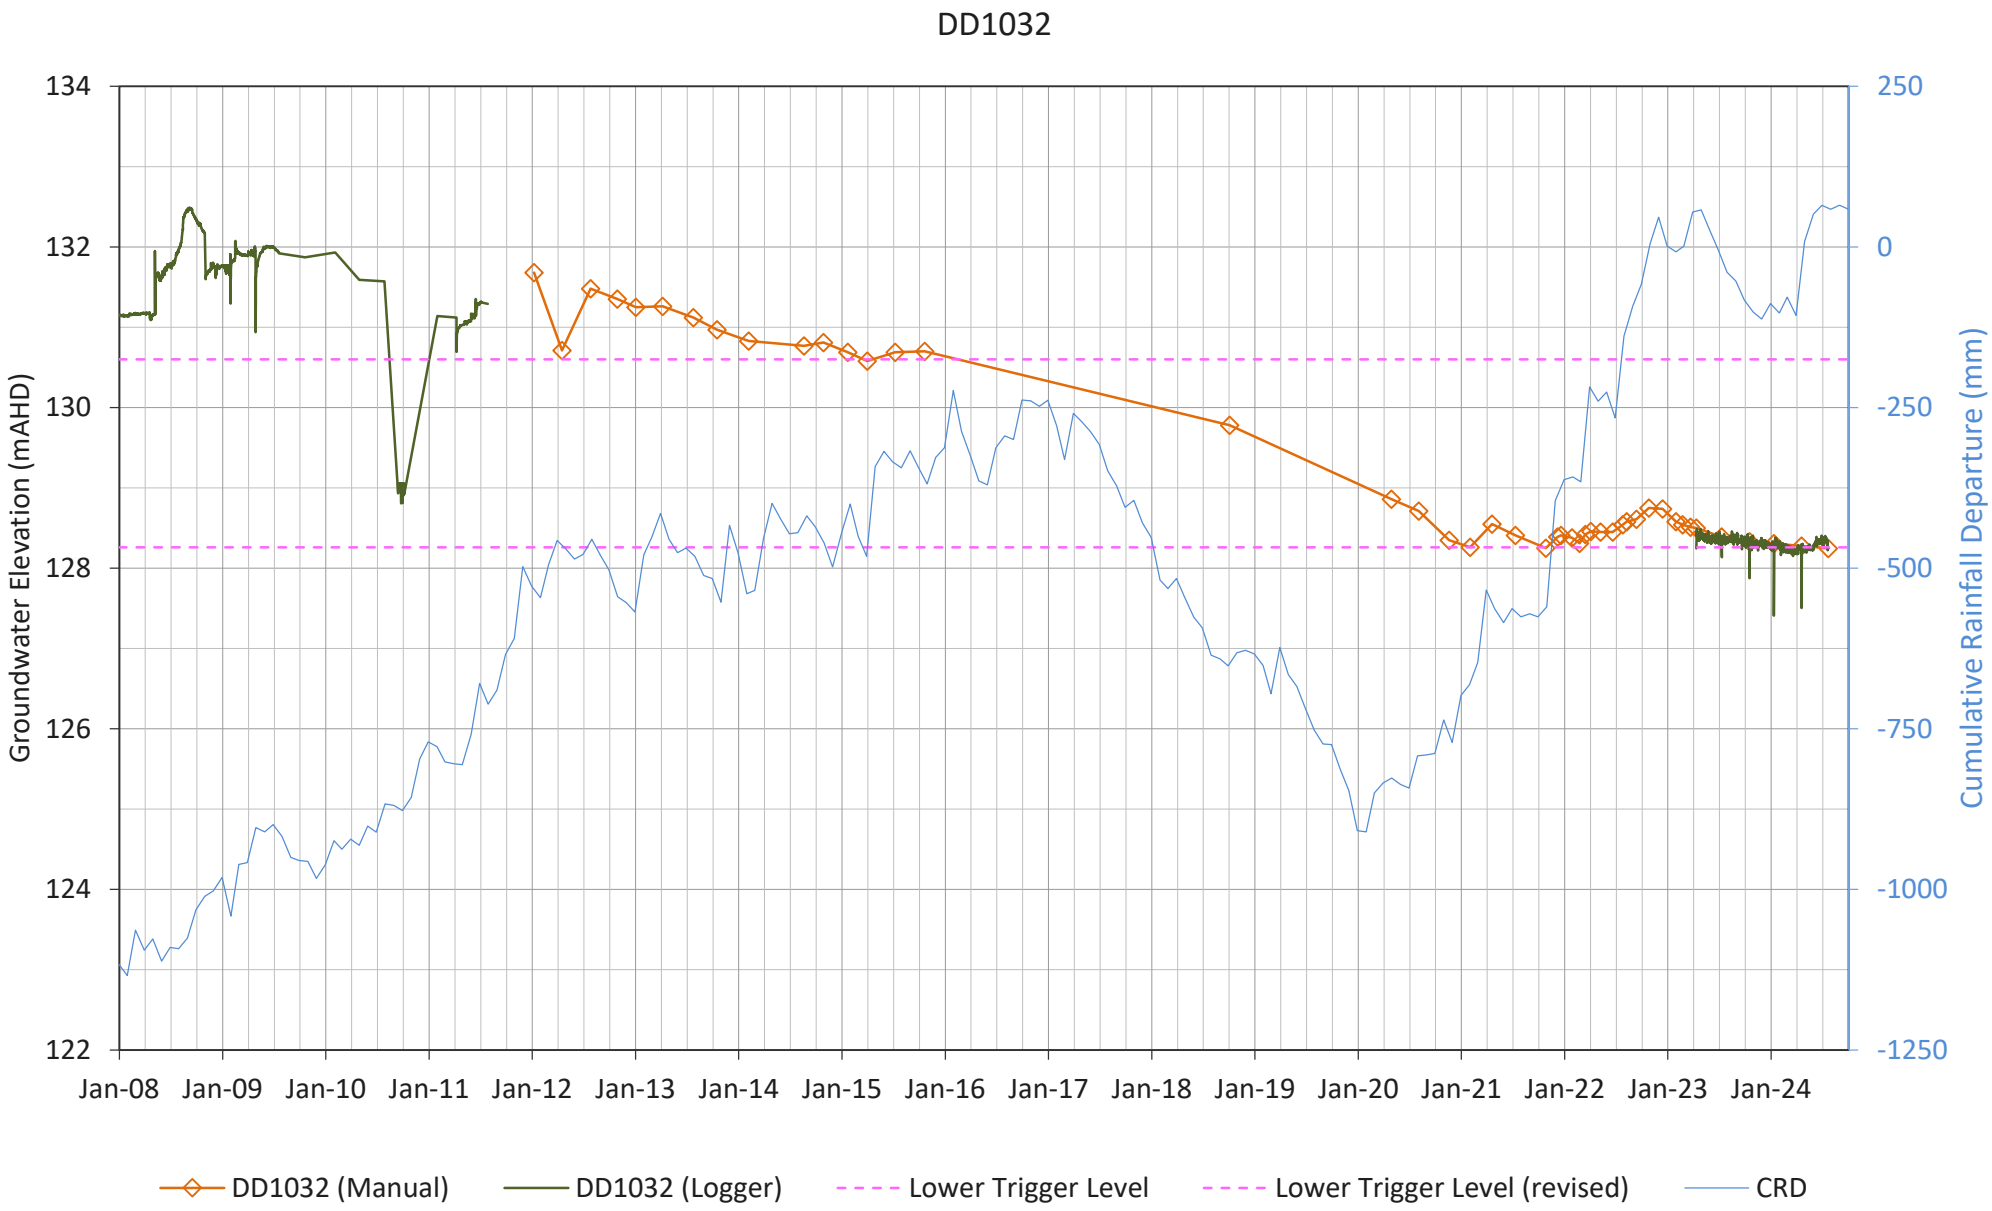
DD1032
Groundwater Elevation (mAHD)
134
132
130
128
126
124
122
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
DD1032 (Manual)
DD1032 (Logger)
Lower Trigger Level
Lower Trigger Level (revised)
CRD

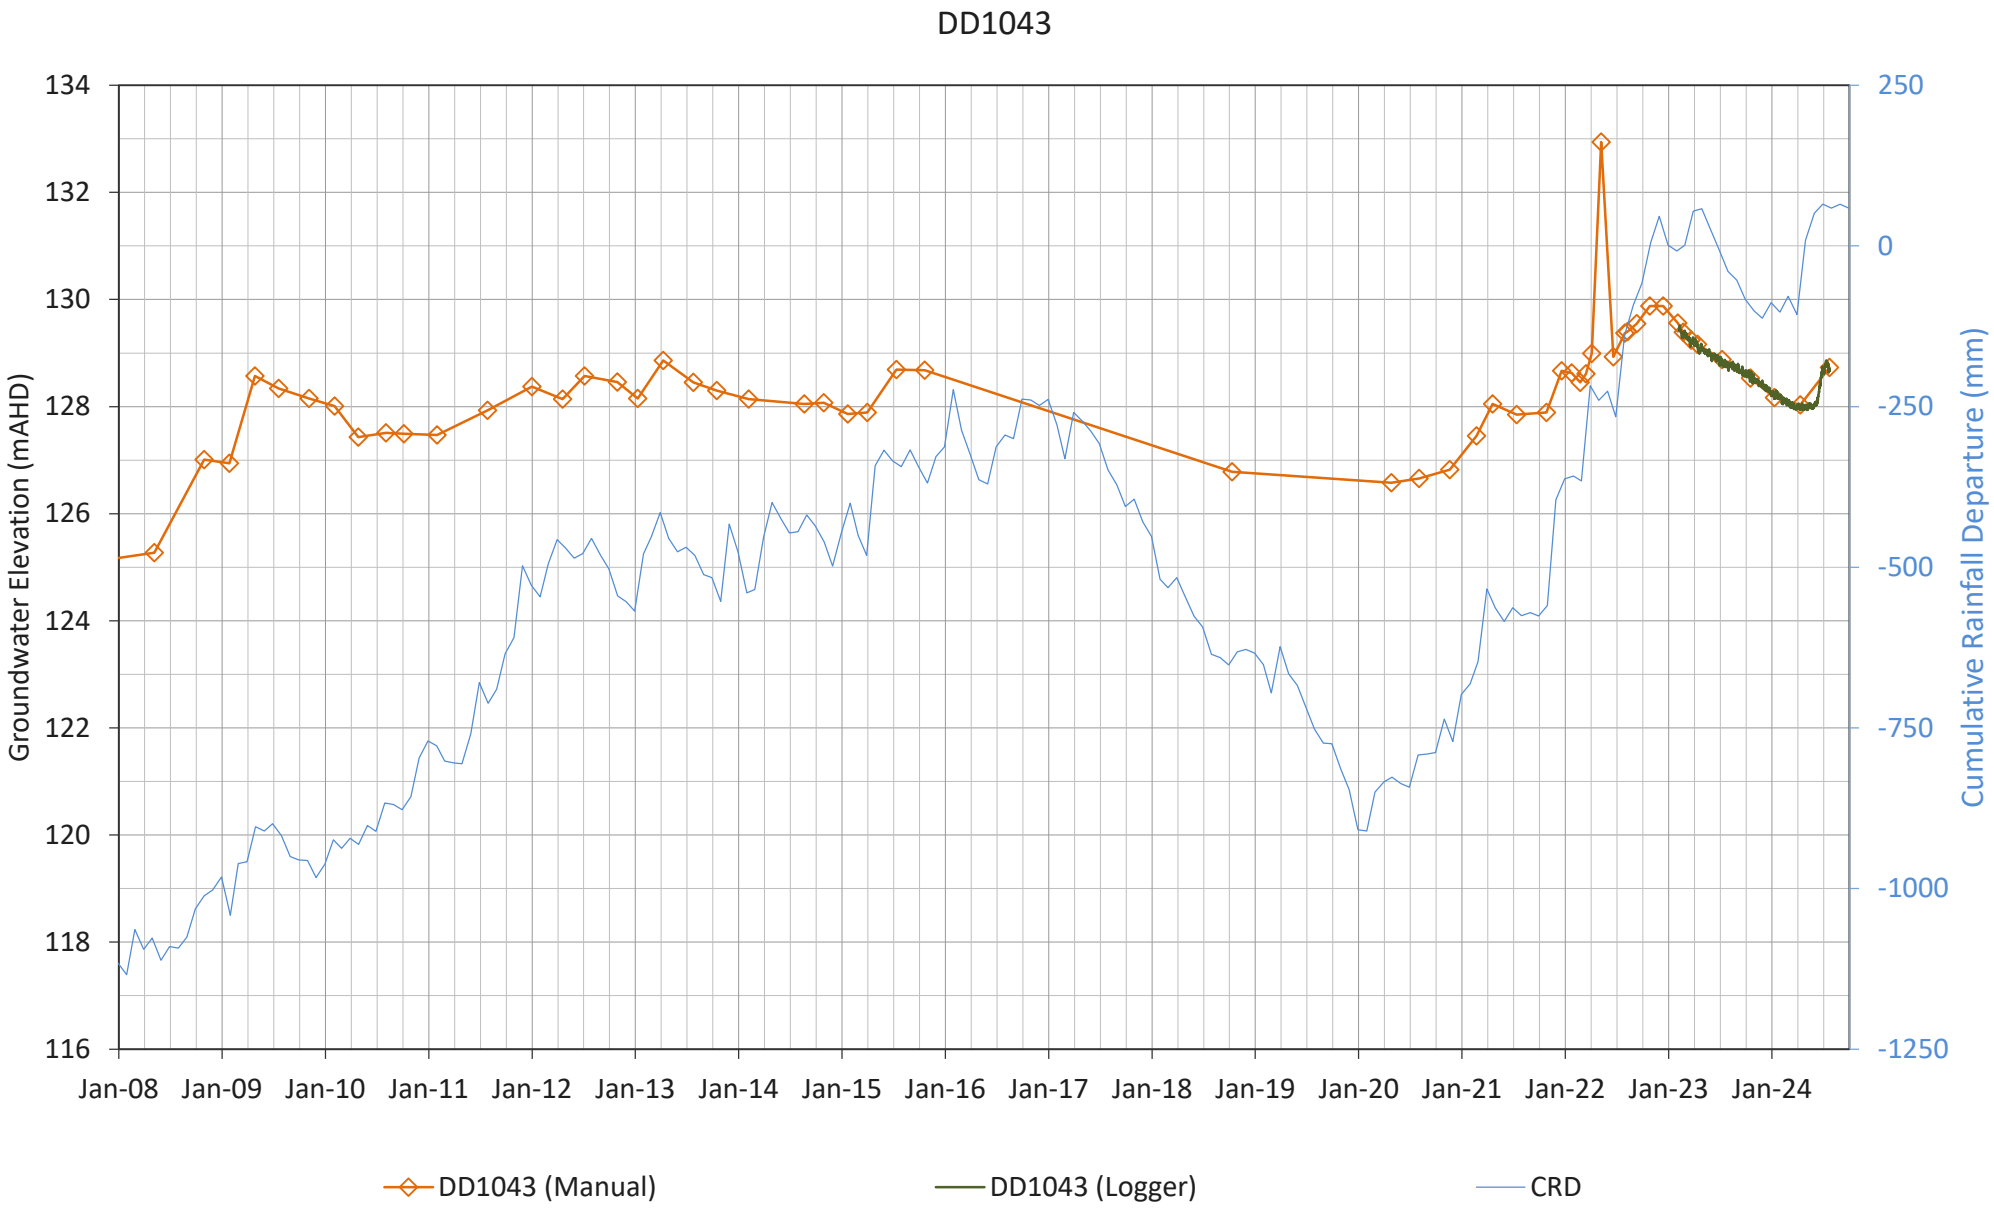
DD1043
Groundwater Elevation (mAHD)
134
132
130
128
126
124
122
120
118
116
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
DD1043 (Manual)
DD1043 (Logger)
CRD

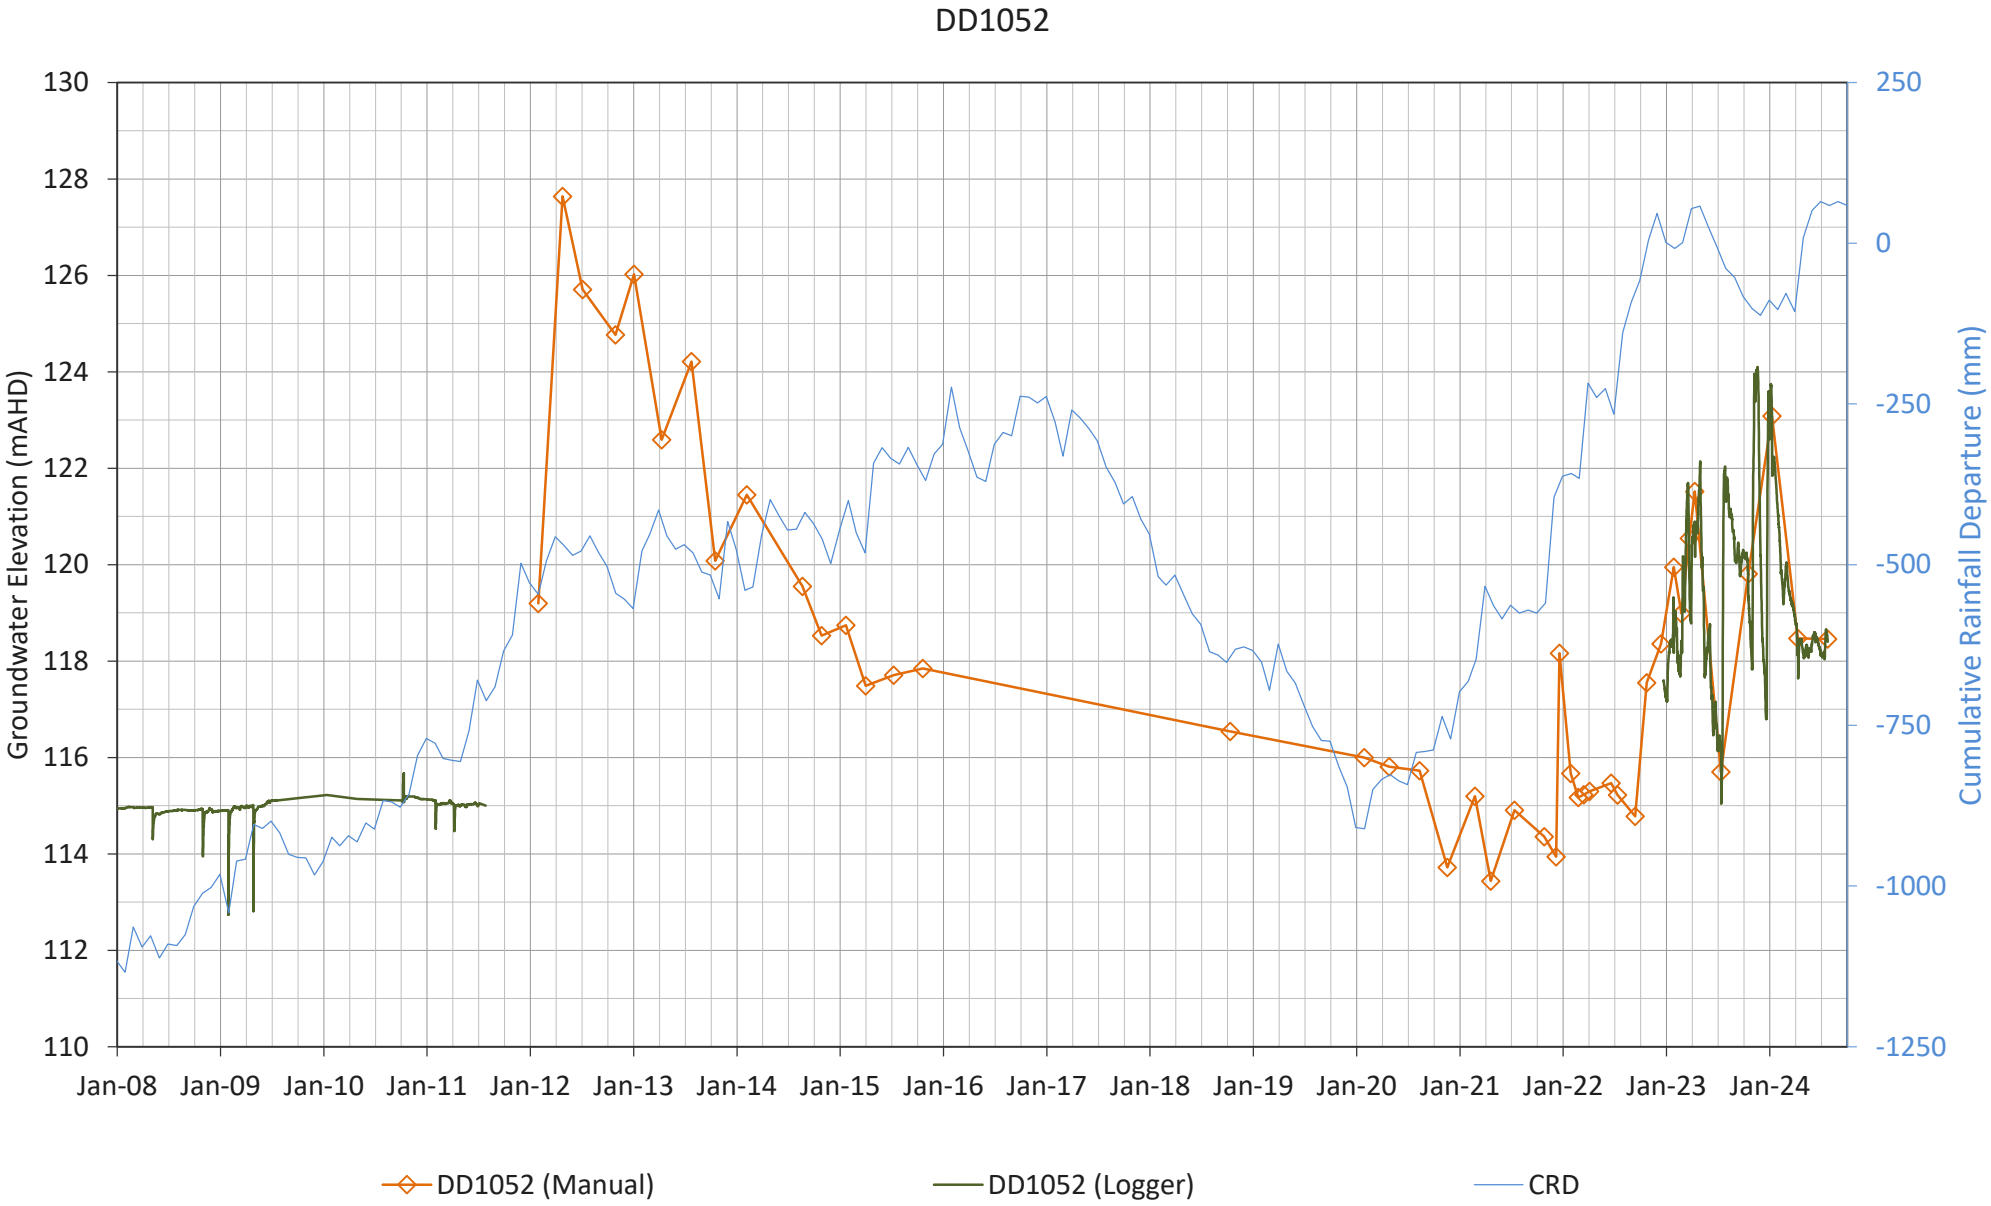
DD1052
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
130
128
126
124
122
120
118
116
114
112
110
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
DD1052 (Manual)
DD1052 (Logger)
CRD

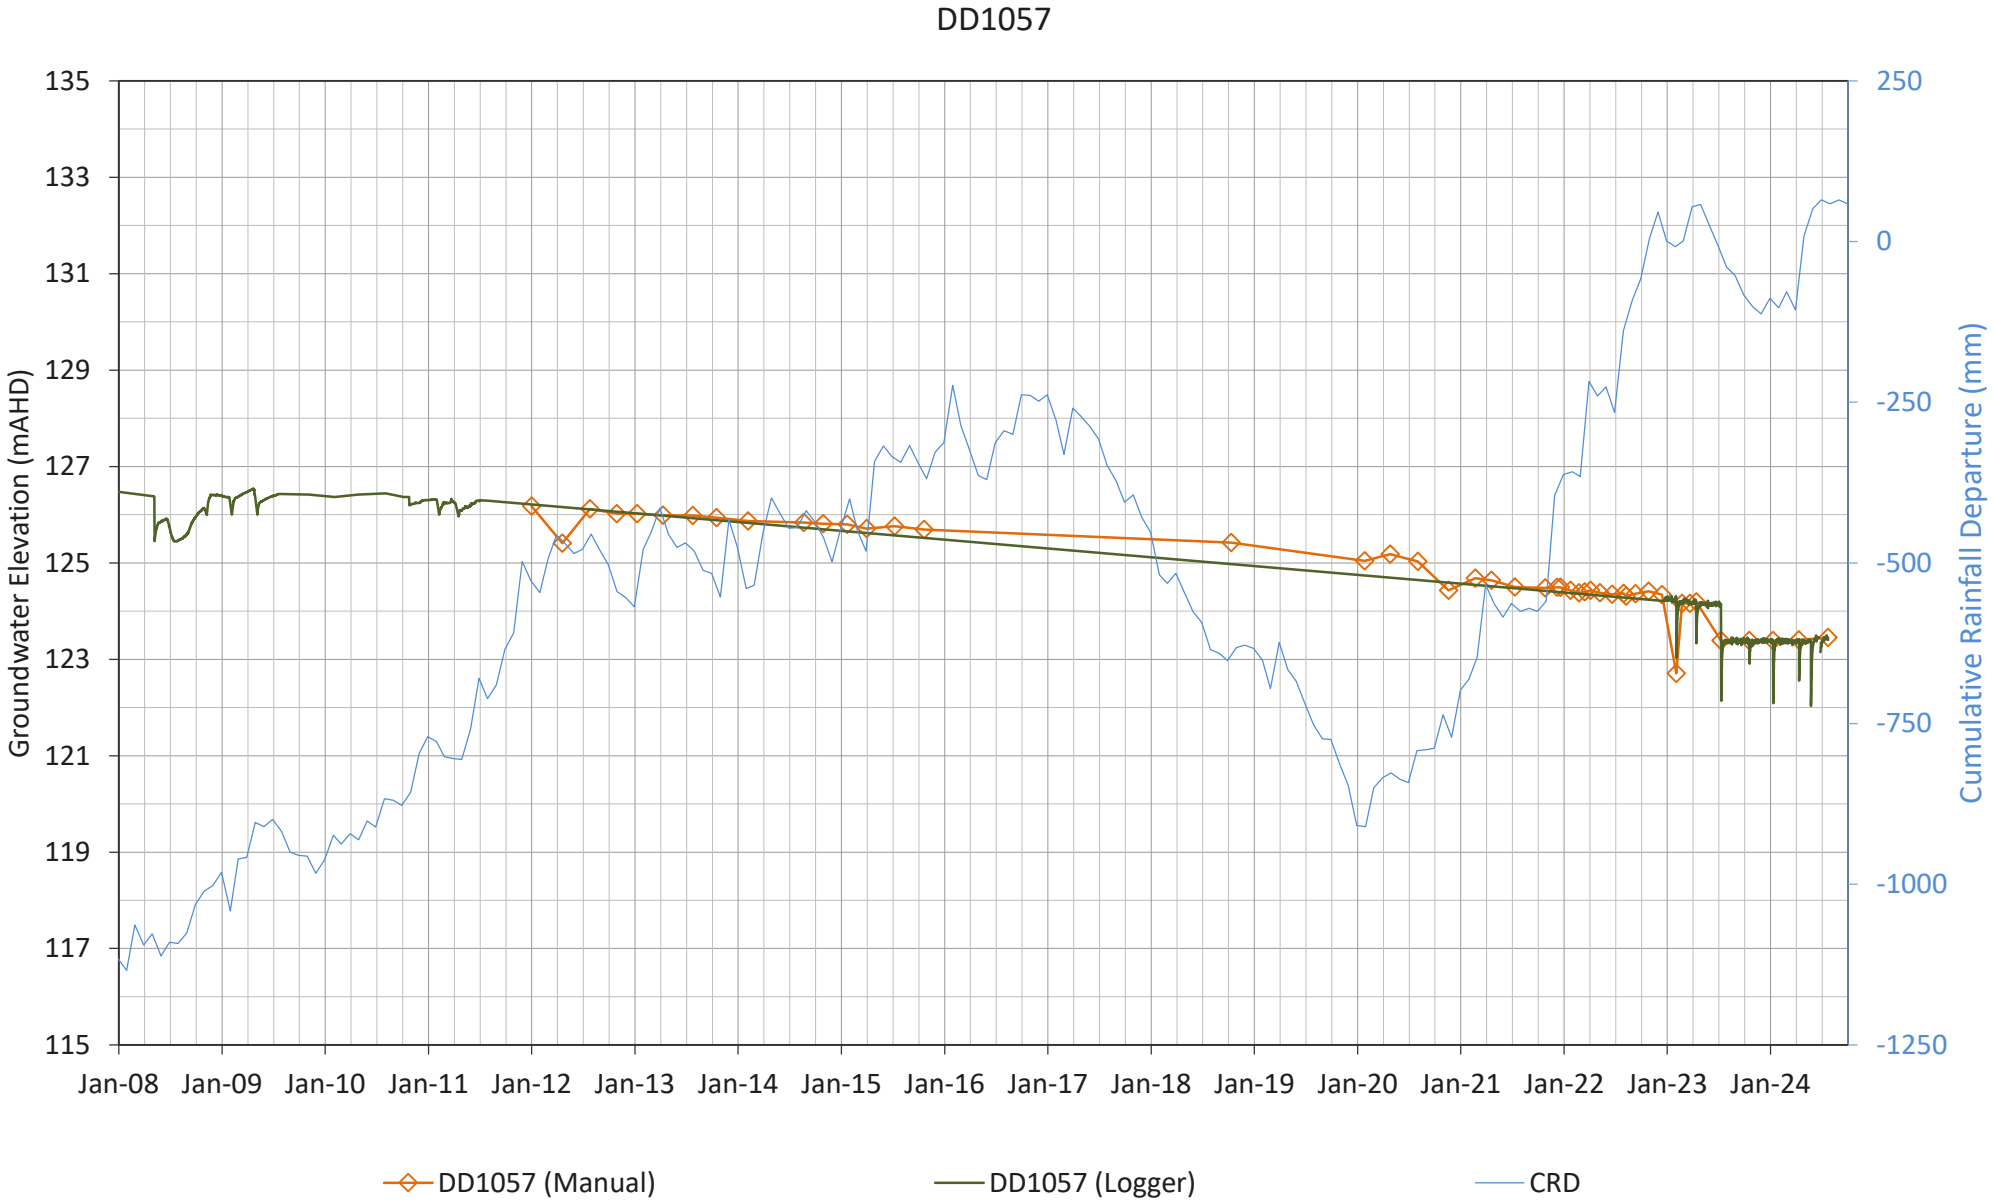
DD1057
Groundwater Elevation (mAHD)
135
133
131
129
127
125
123
121
119
117
115
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
DD1057 (Manual)
DD1057 (Logger)
CRD

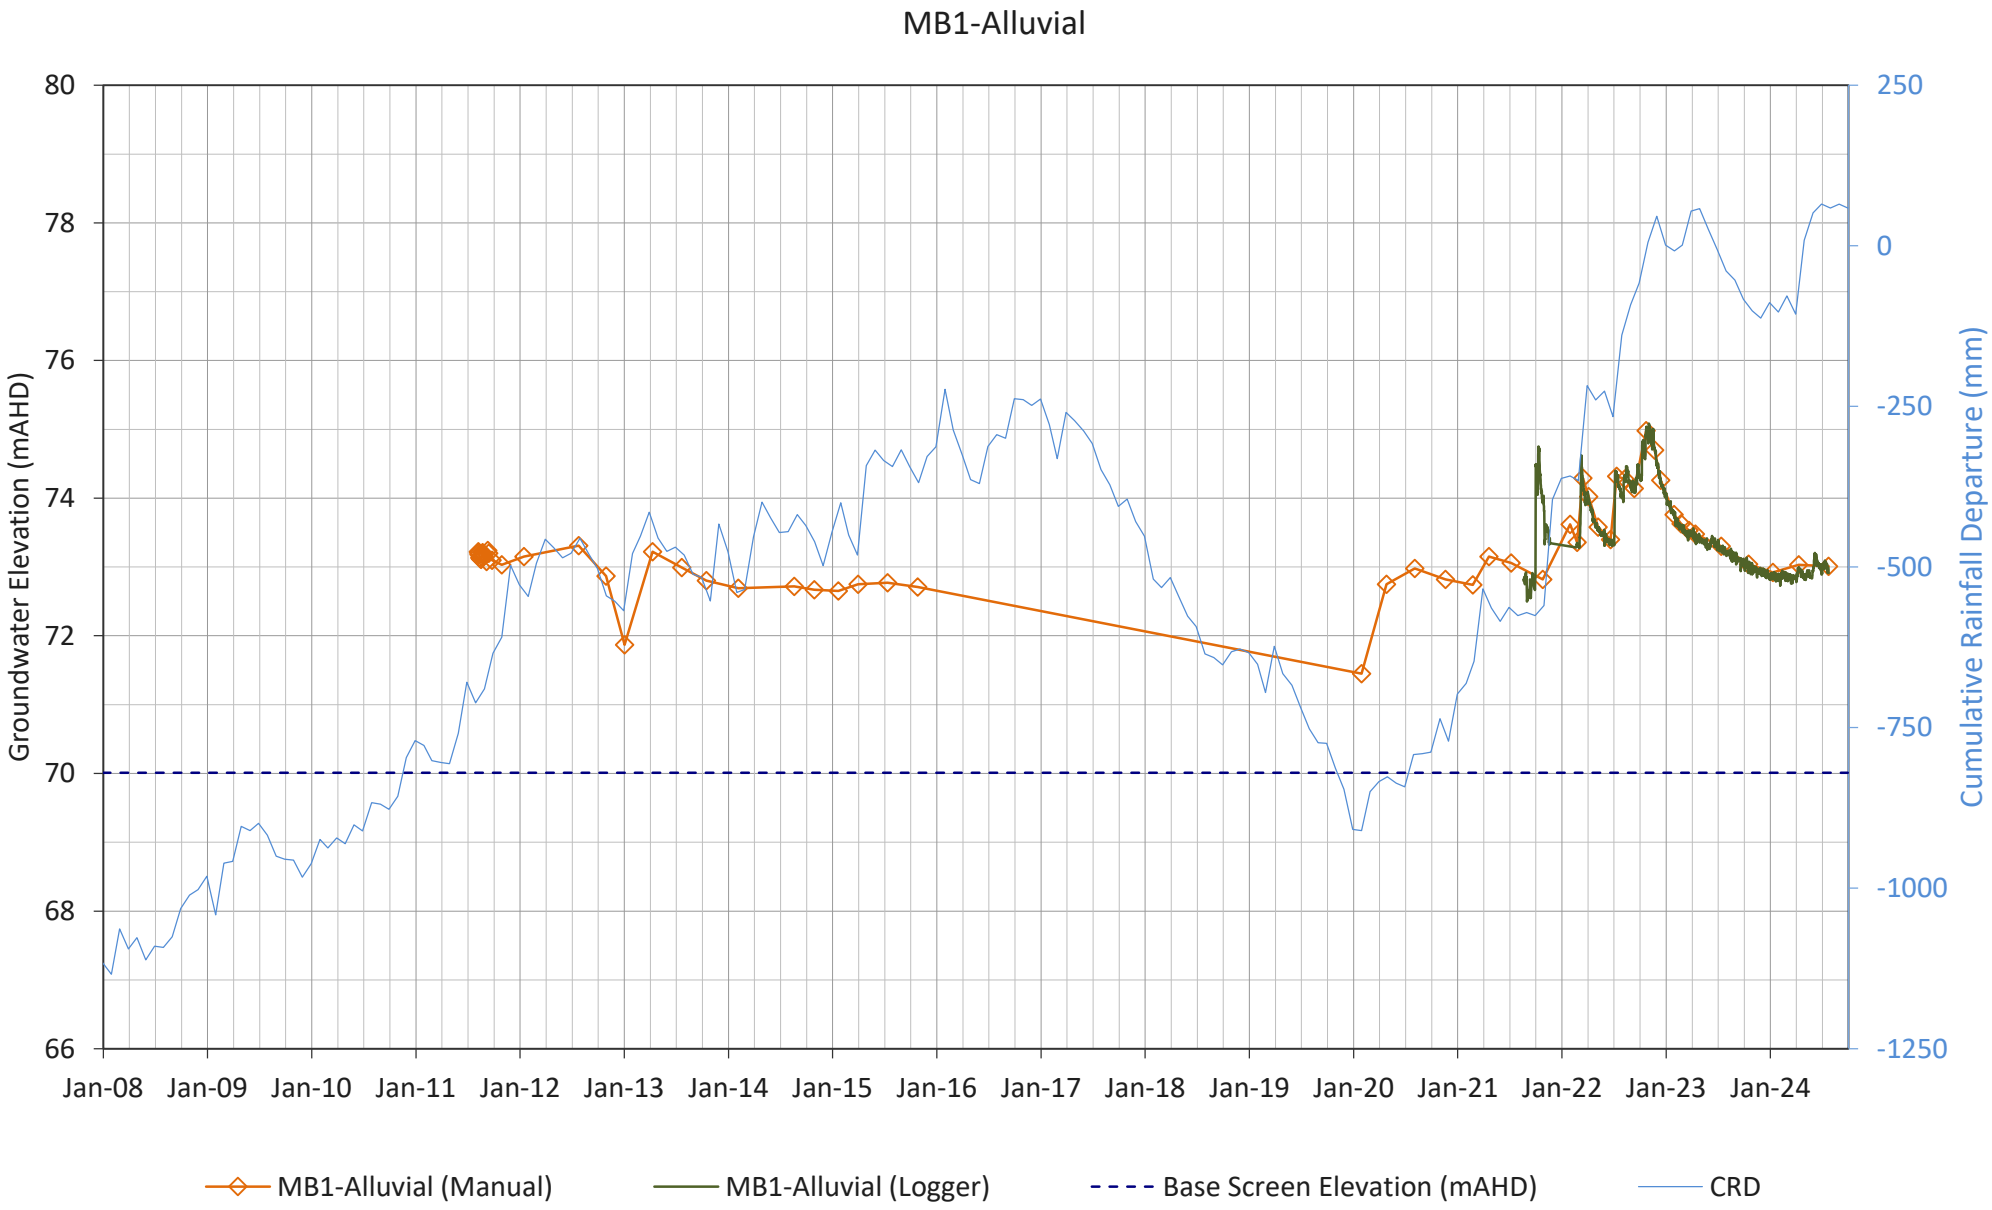
MB1-Alluvial
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
80
78
76
74
72
70
68
66
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB1-Alluvial (Manual)
MB1-Alluvial (Logger)
Base Screen Elevation (mAHD)
CRD

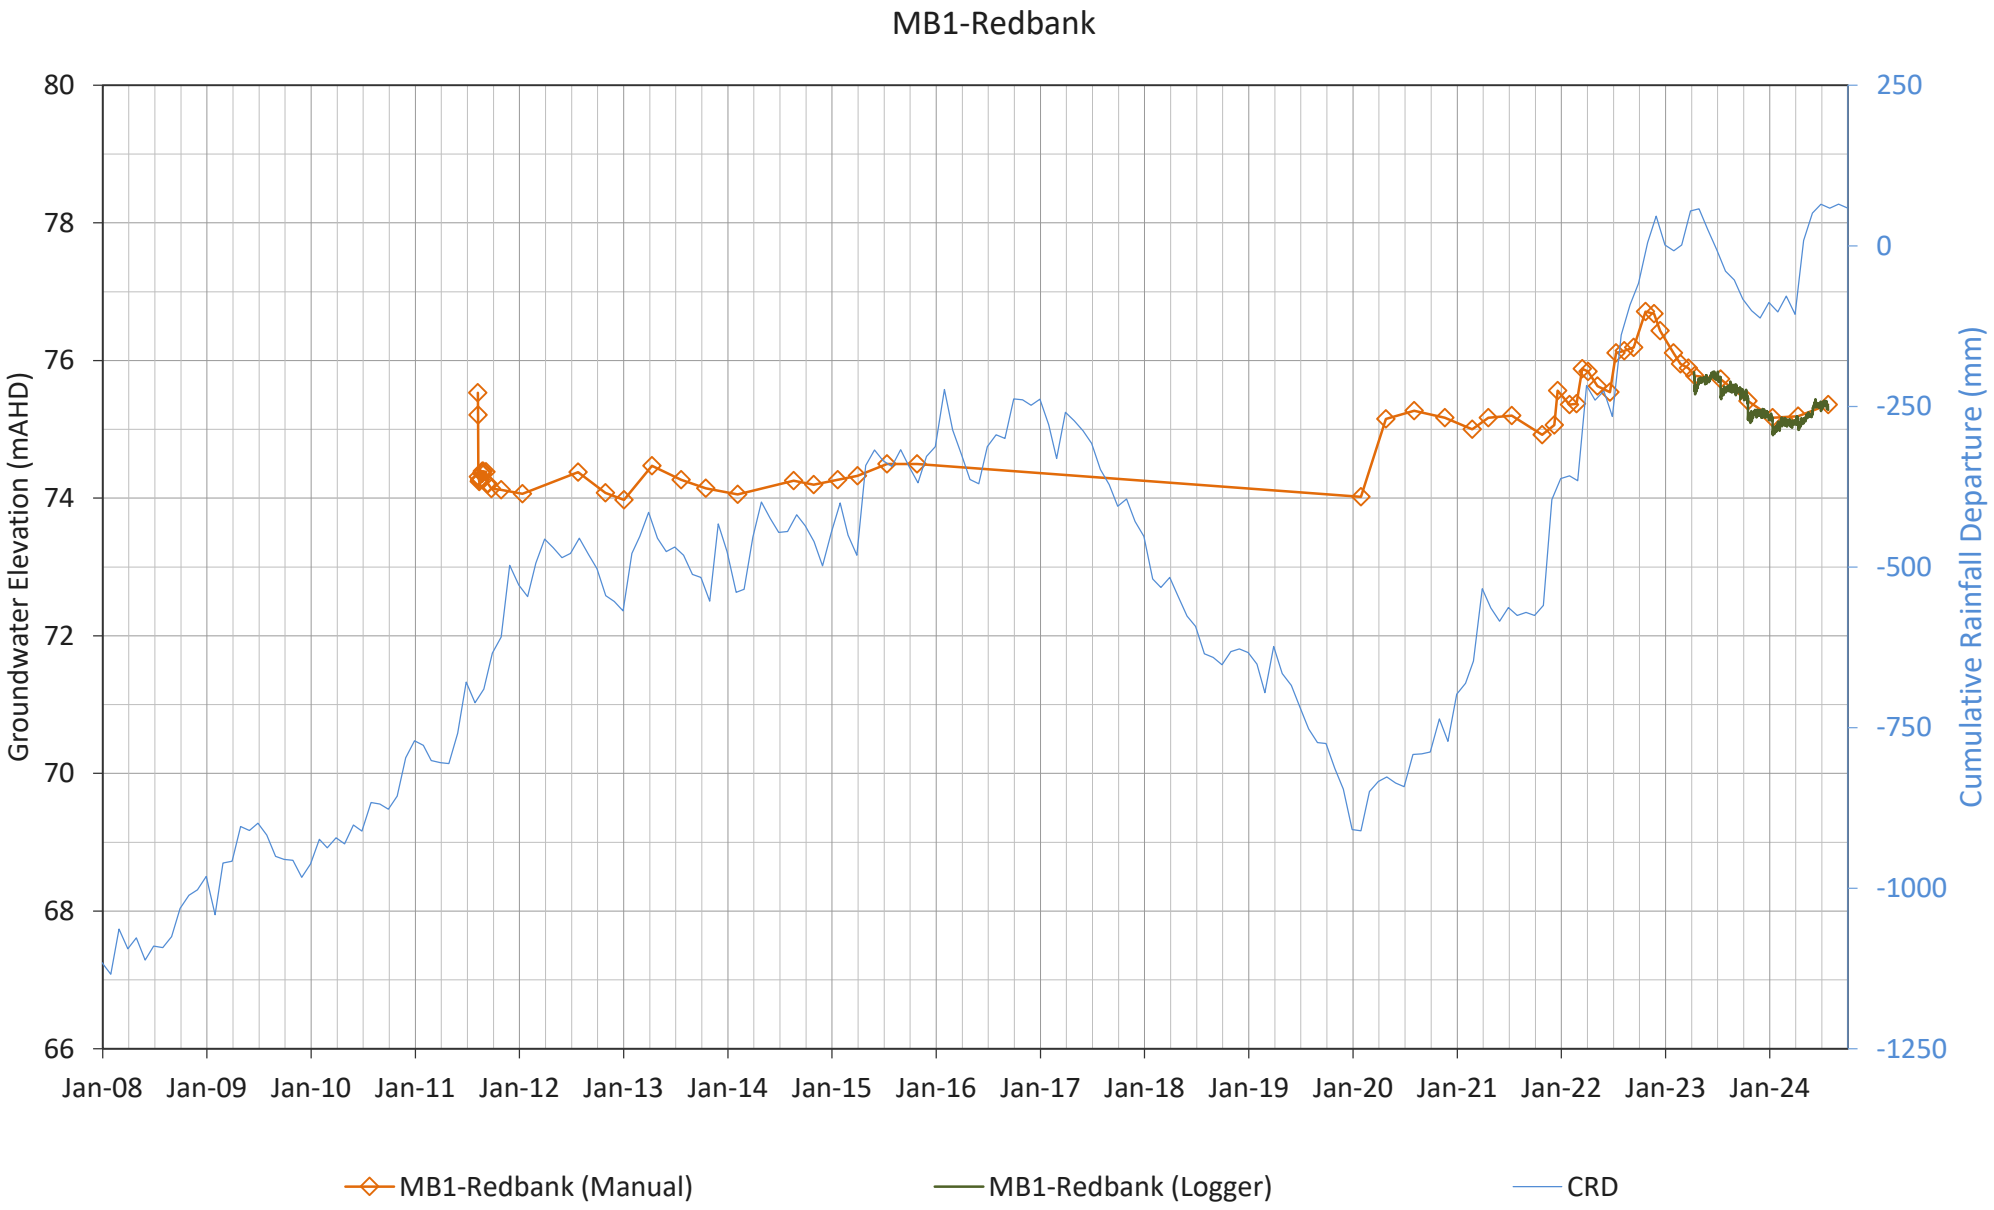
MB1-Redbank
Groundwater Elevation (mAHD)
80
78
76
74
72
70
68
66
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB1-Redbank (Manual)
MB1-Redbank (Logger)
CRD

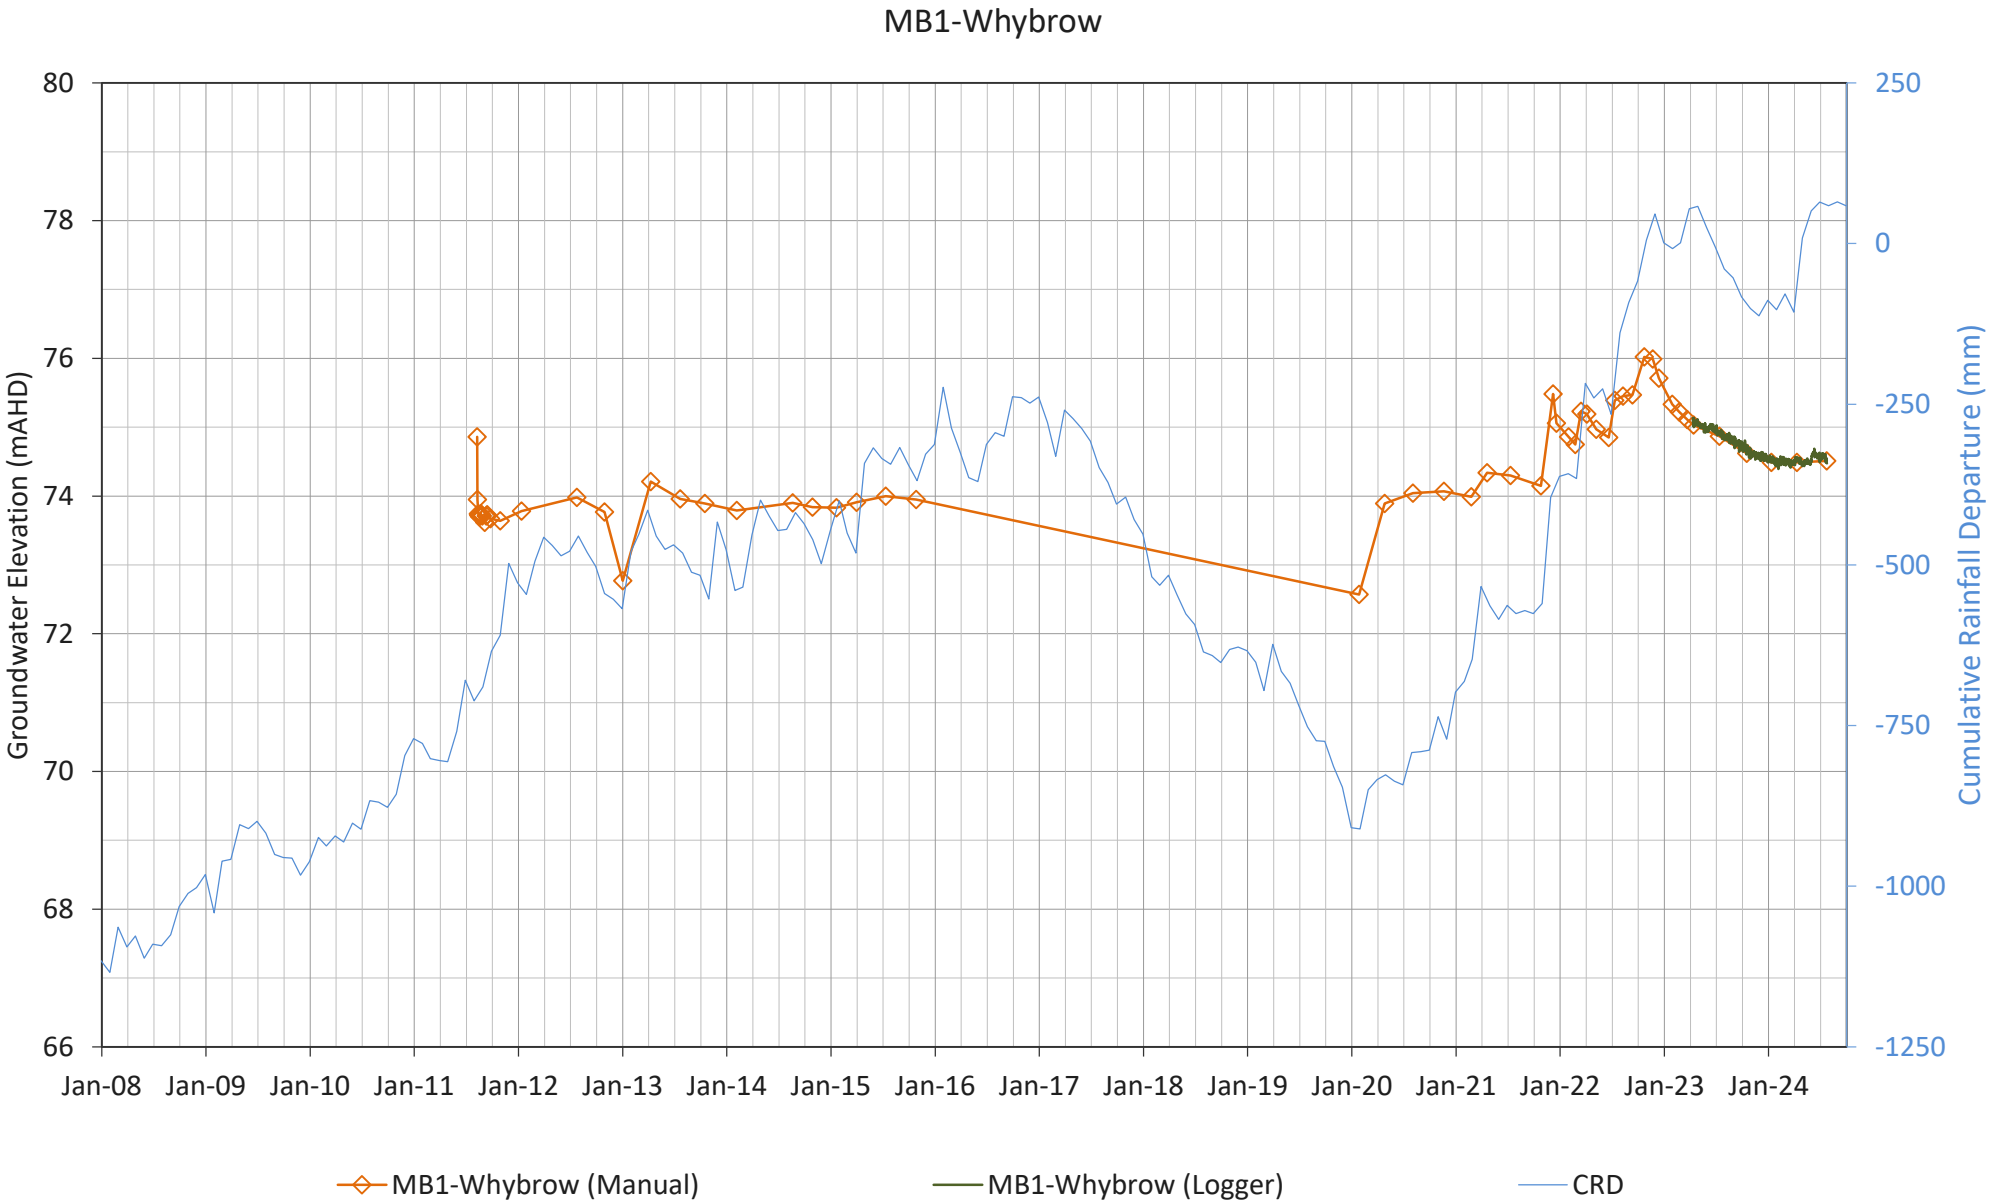
MB1-Whybrow
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
80
78
76
74
72
70
68
66
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB1-Whybrow (Manual)
MB1-Whybrow (Logger)
CRD

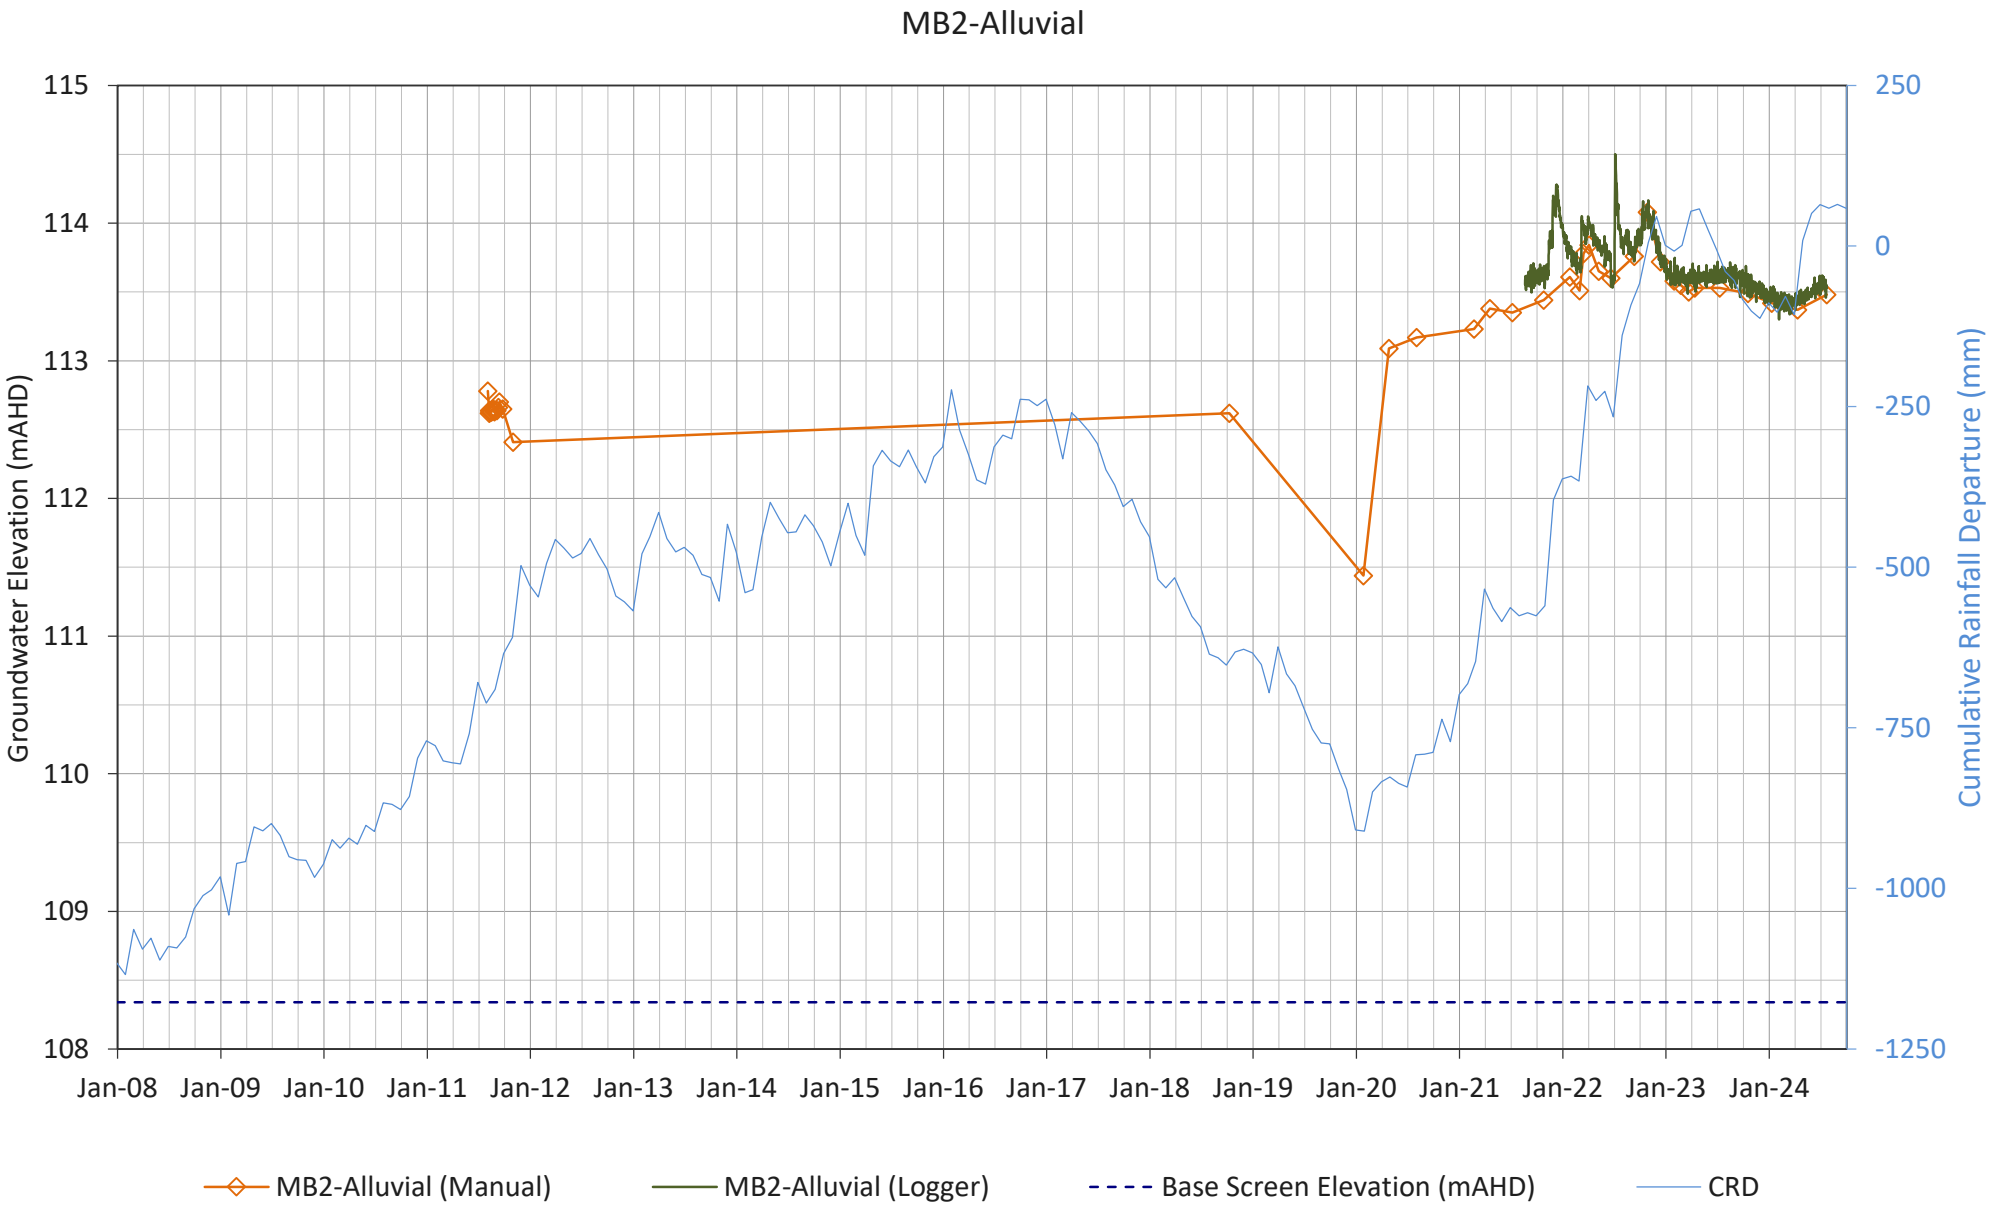
MB2-Alluvial
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
115
114
113
112
111
110
109
108
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB2-Alluvial (Manual)
MB2-Alluvial (Logger)
Base Screen Elevation (mAHD)
CRD

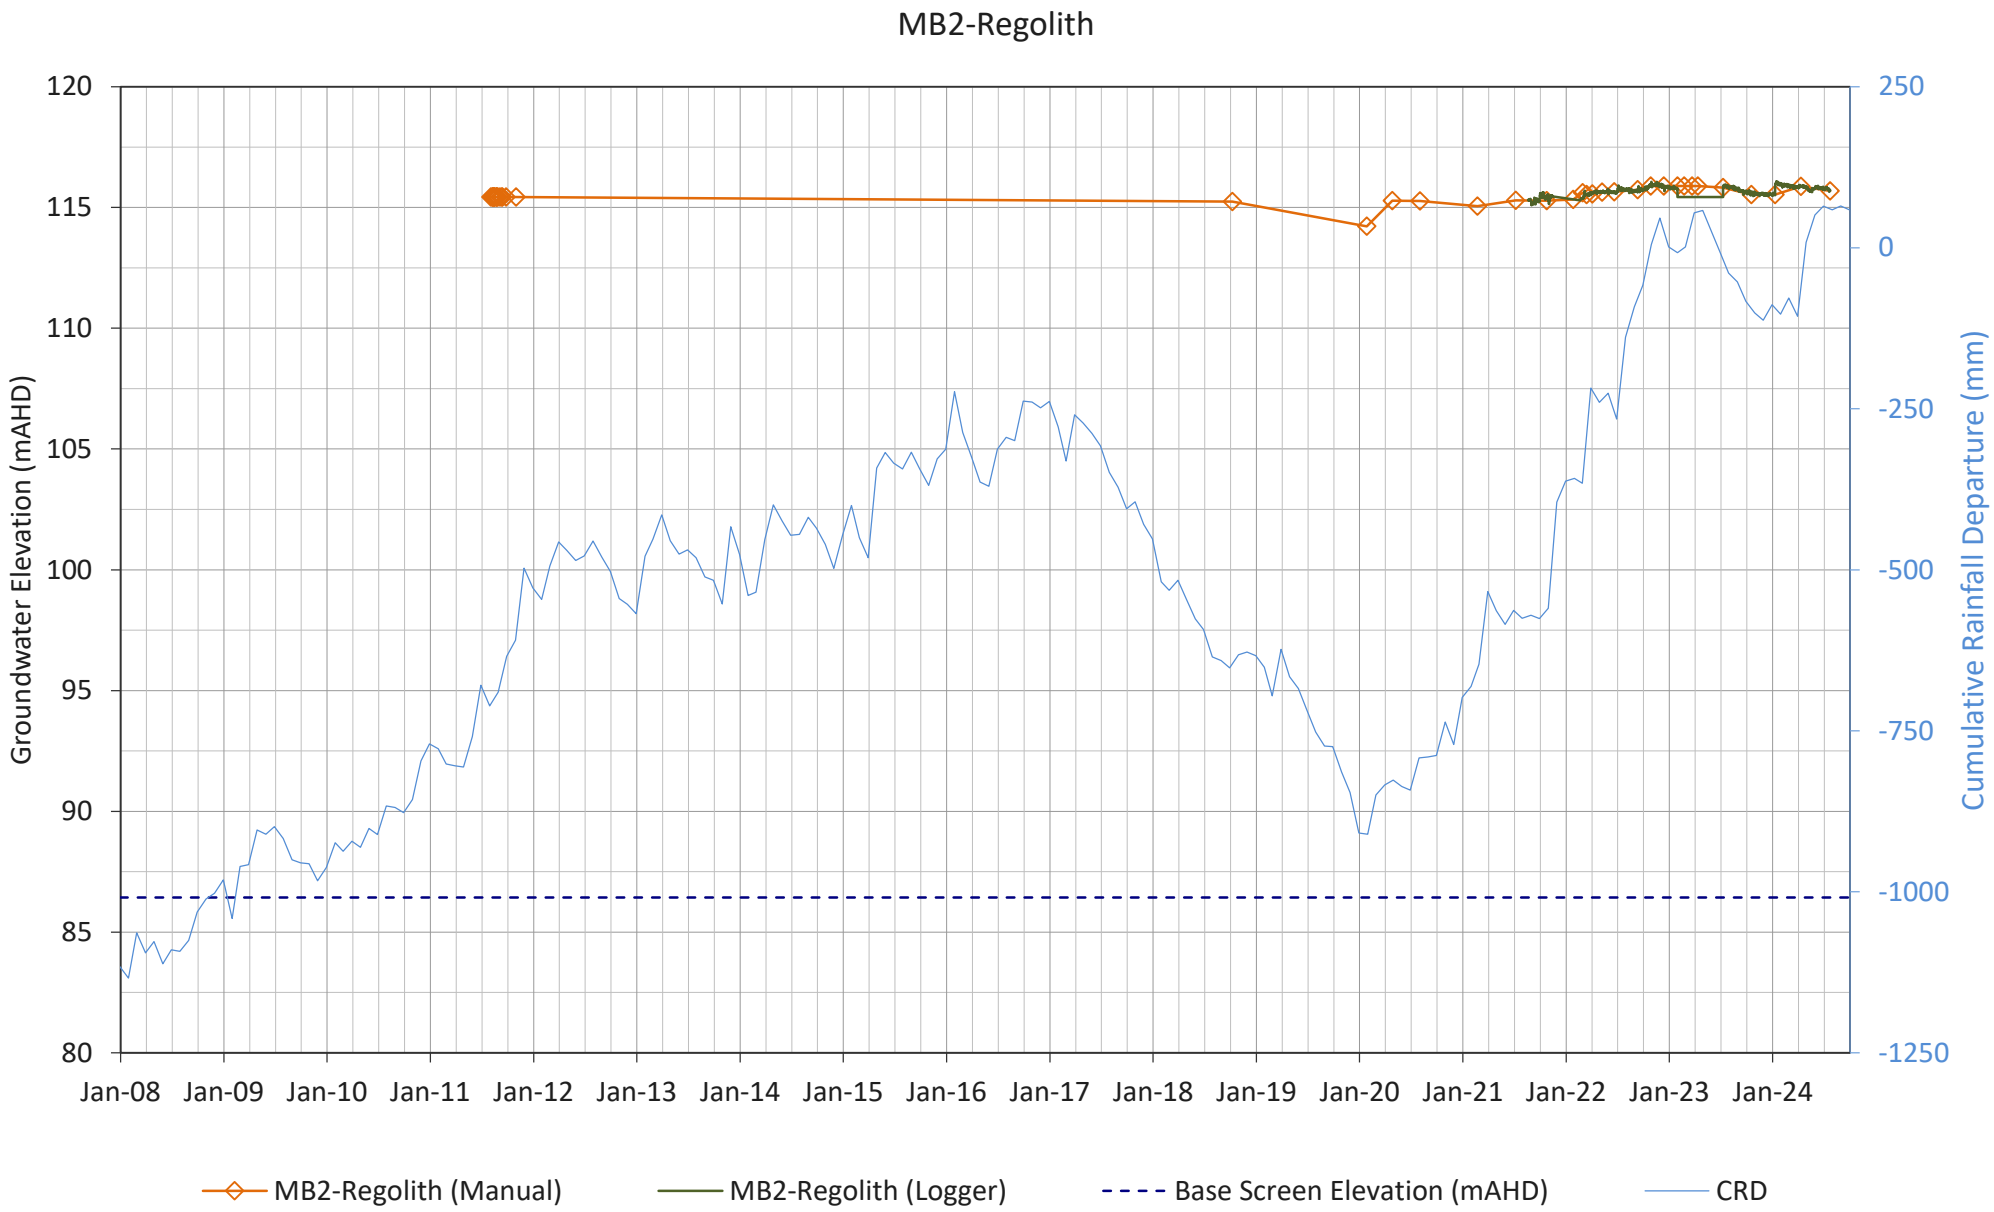
MB2-Regolith
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
120
115
110
105
100
95
90
85
80
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB2-Regolith (Manual)
MB2-Regolith (Logger)
Base Screen Elevation (mAHD)
CRD

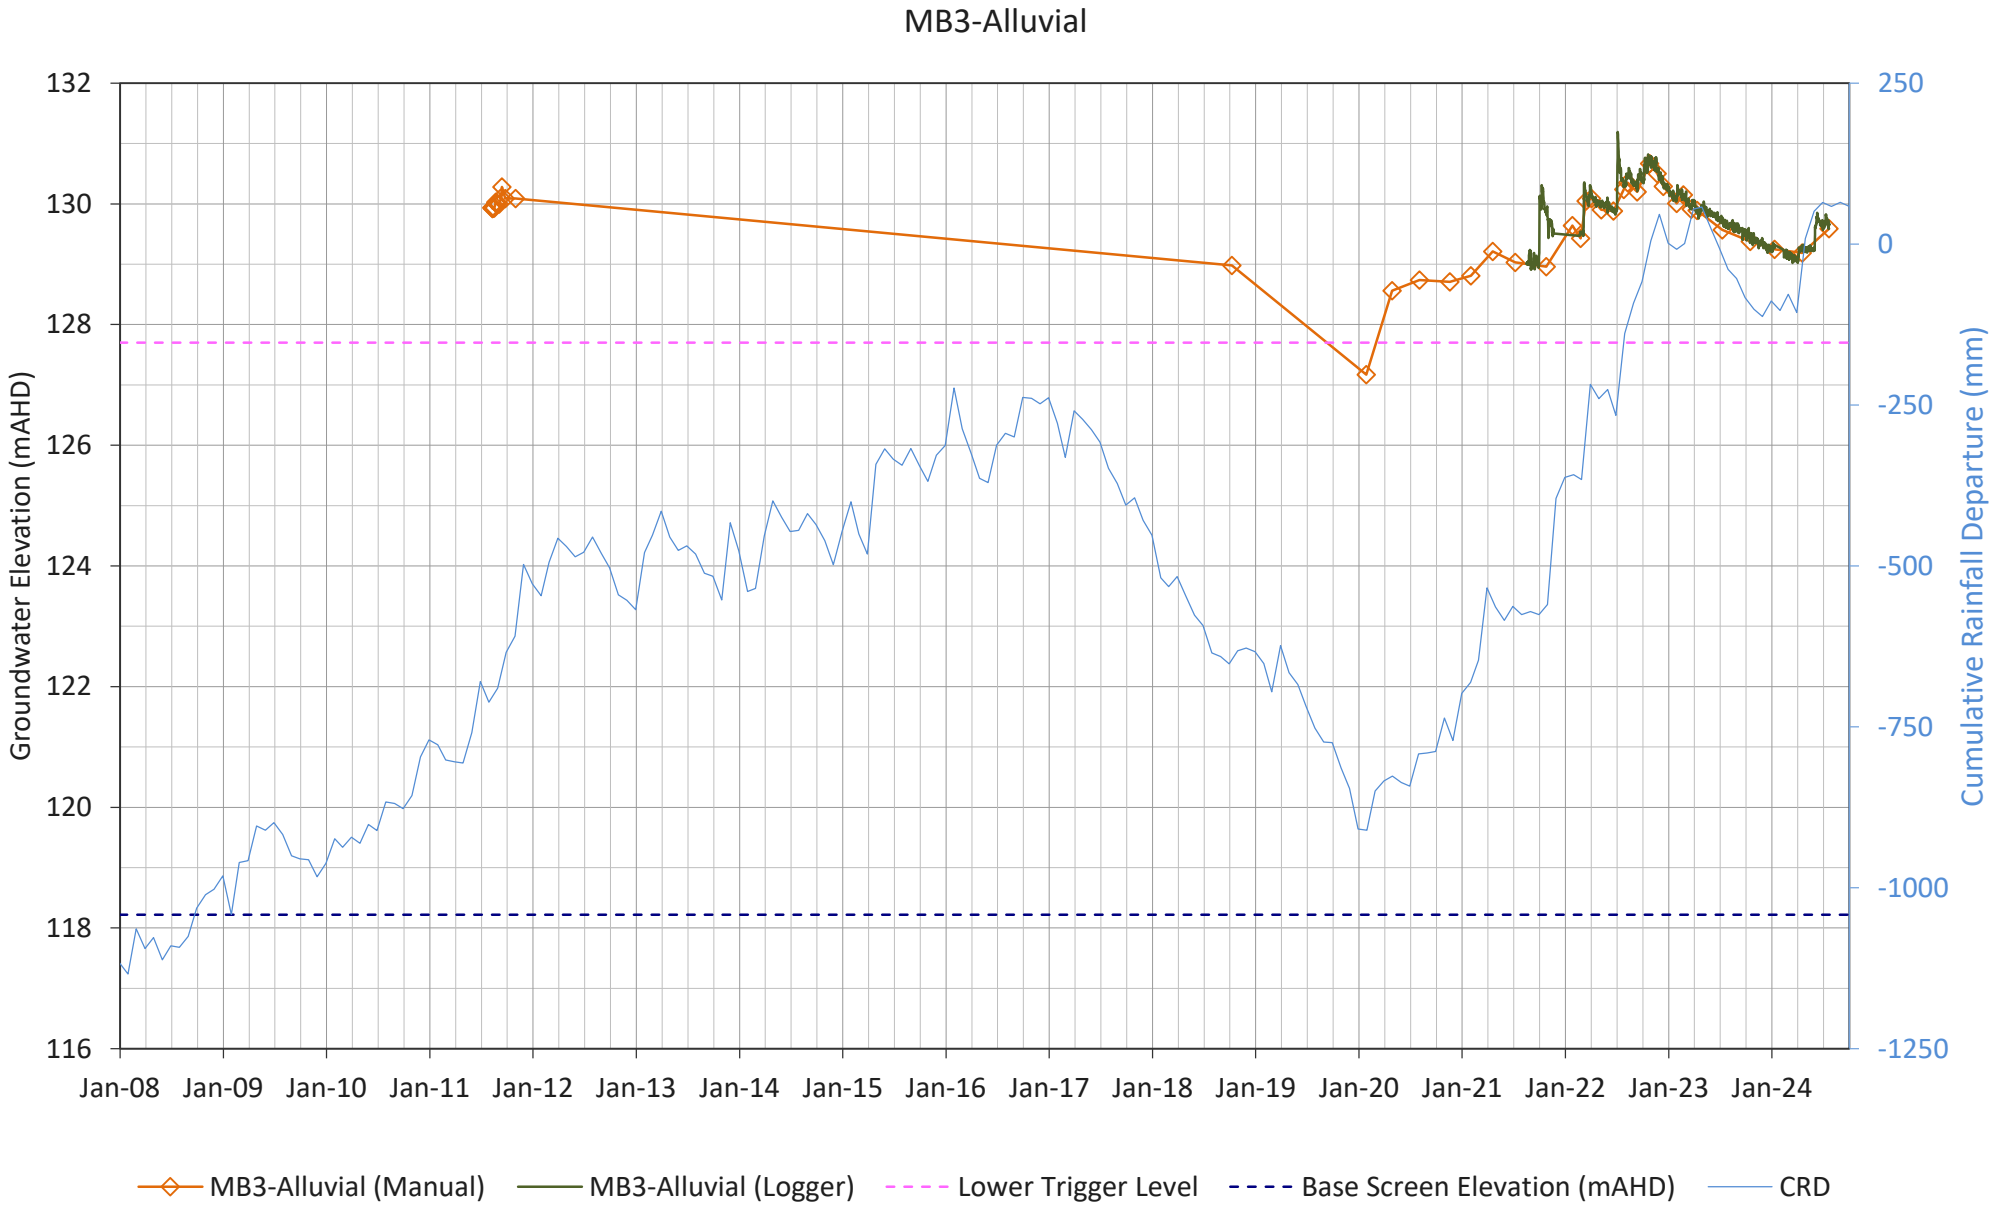
MB3-Alluvial
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
132
130
128
126
124
122
120
118
116
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB3-Alluvial (Manual)
MB3-Alluvial (Logger)
Lower Trigger Level
Base Screen Elevation (mAHD)
CRD

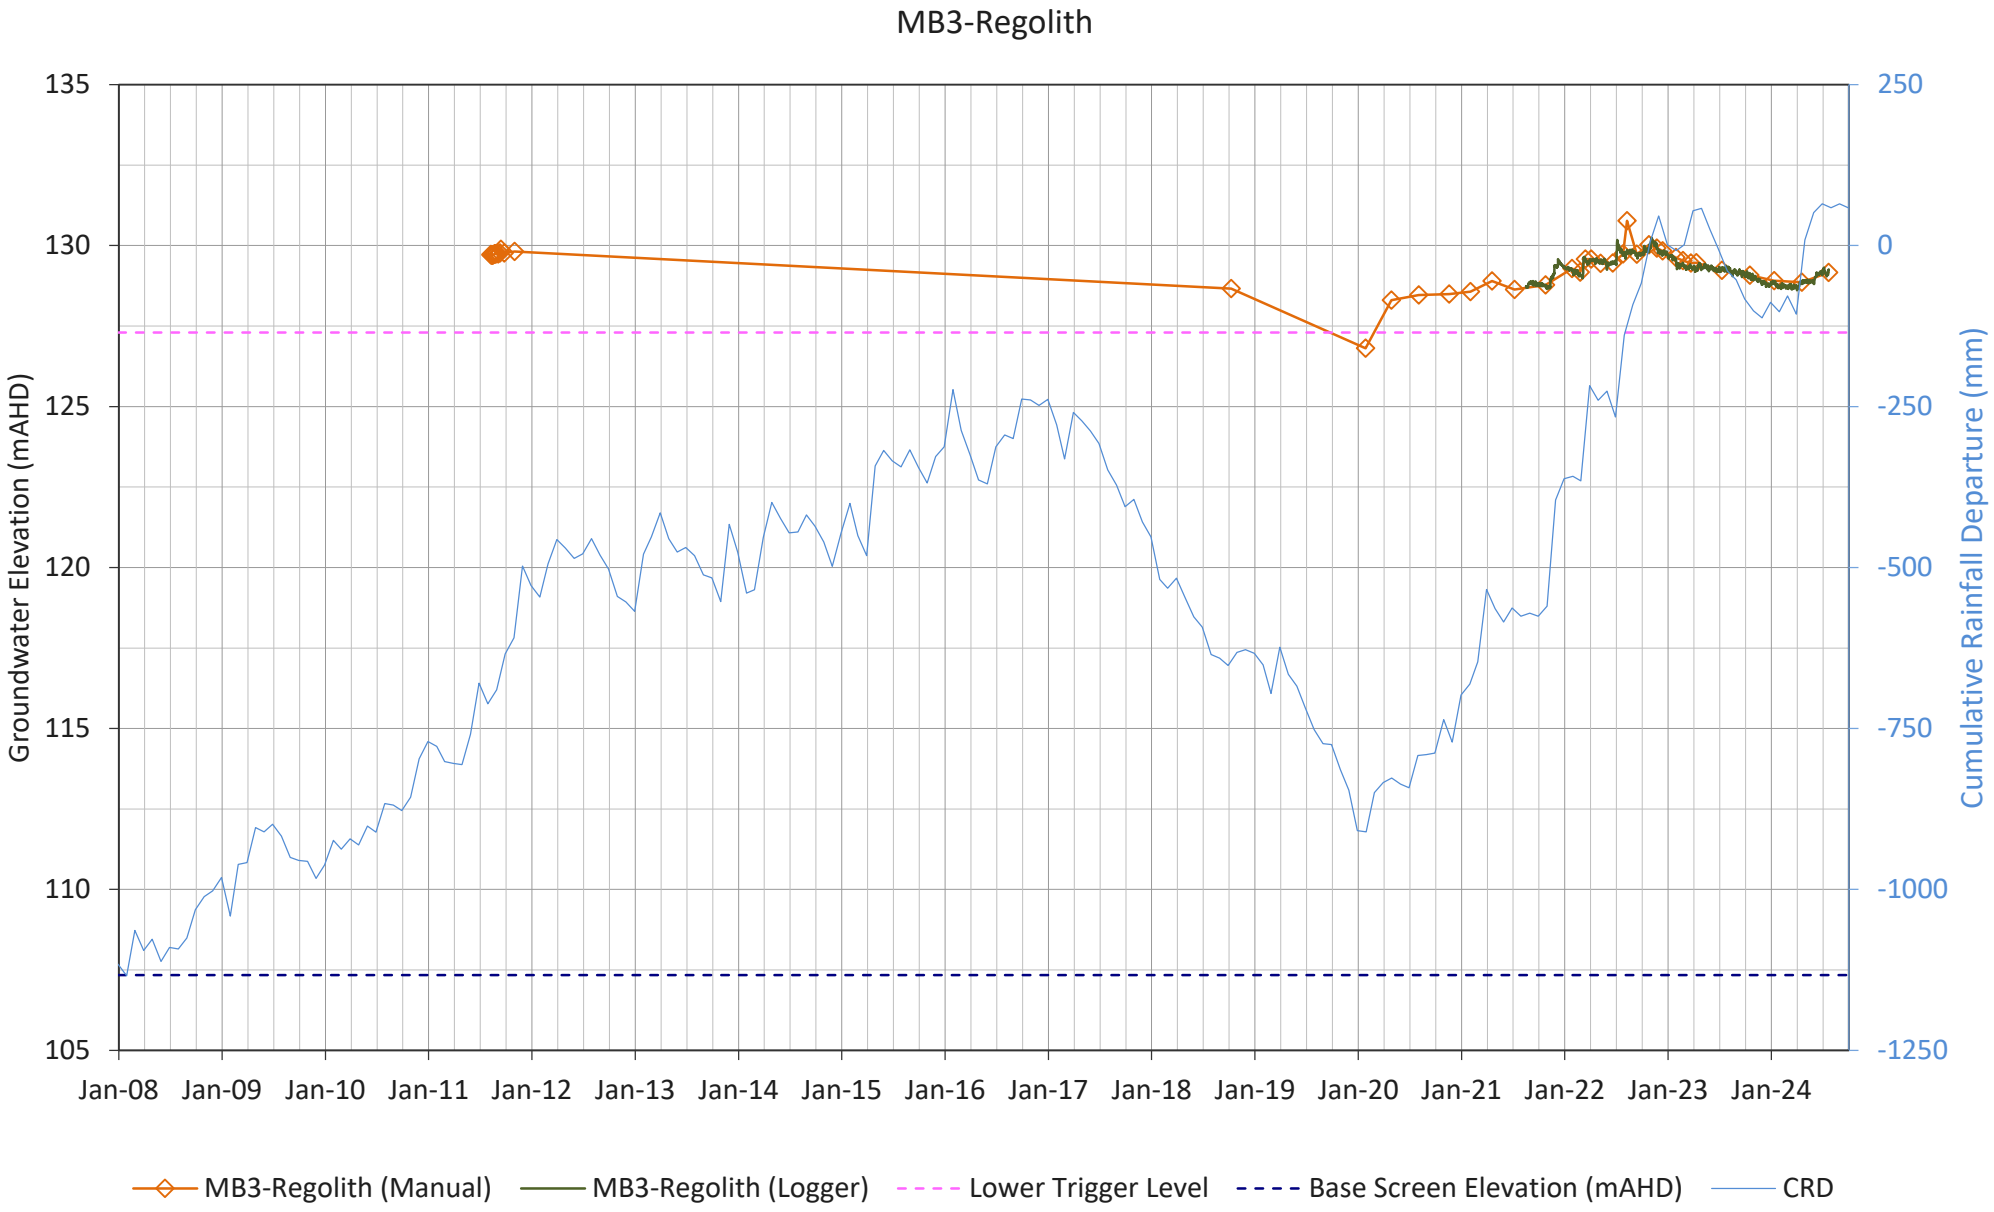
MB3-Regolith
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
135
130
125
120
115
110
105
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB3-Regolith (Manual)
MB3-Regolith (Logger)
Lower Trigger Level
Base Screen Elevation (mAHD)
CRD

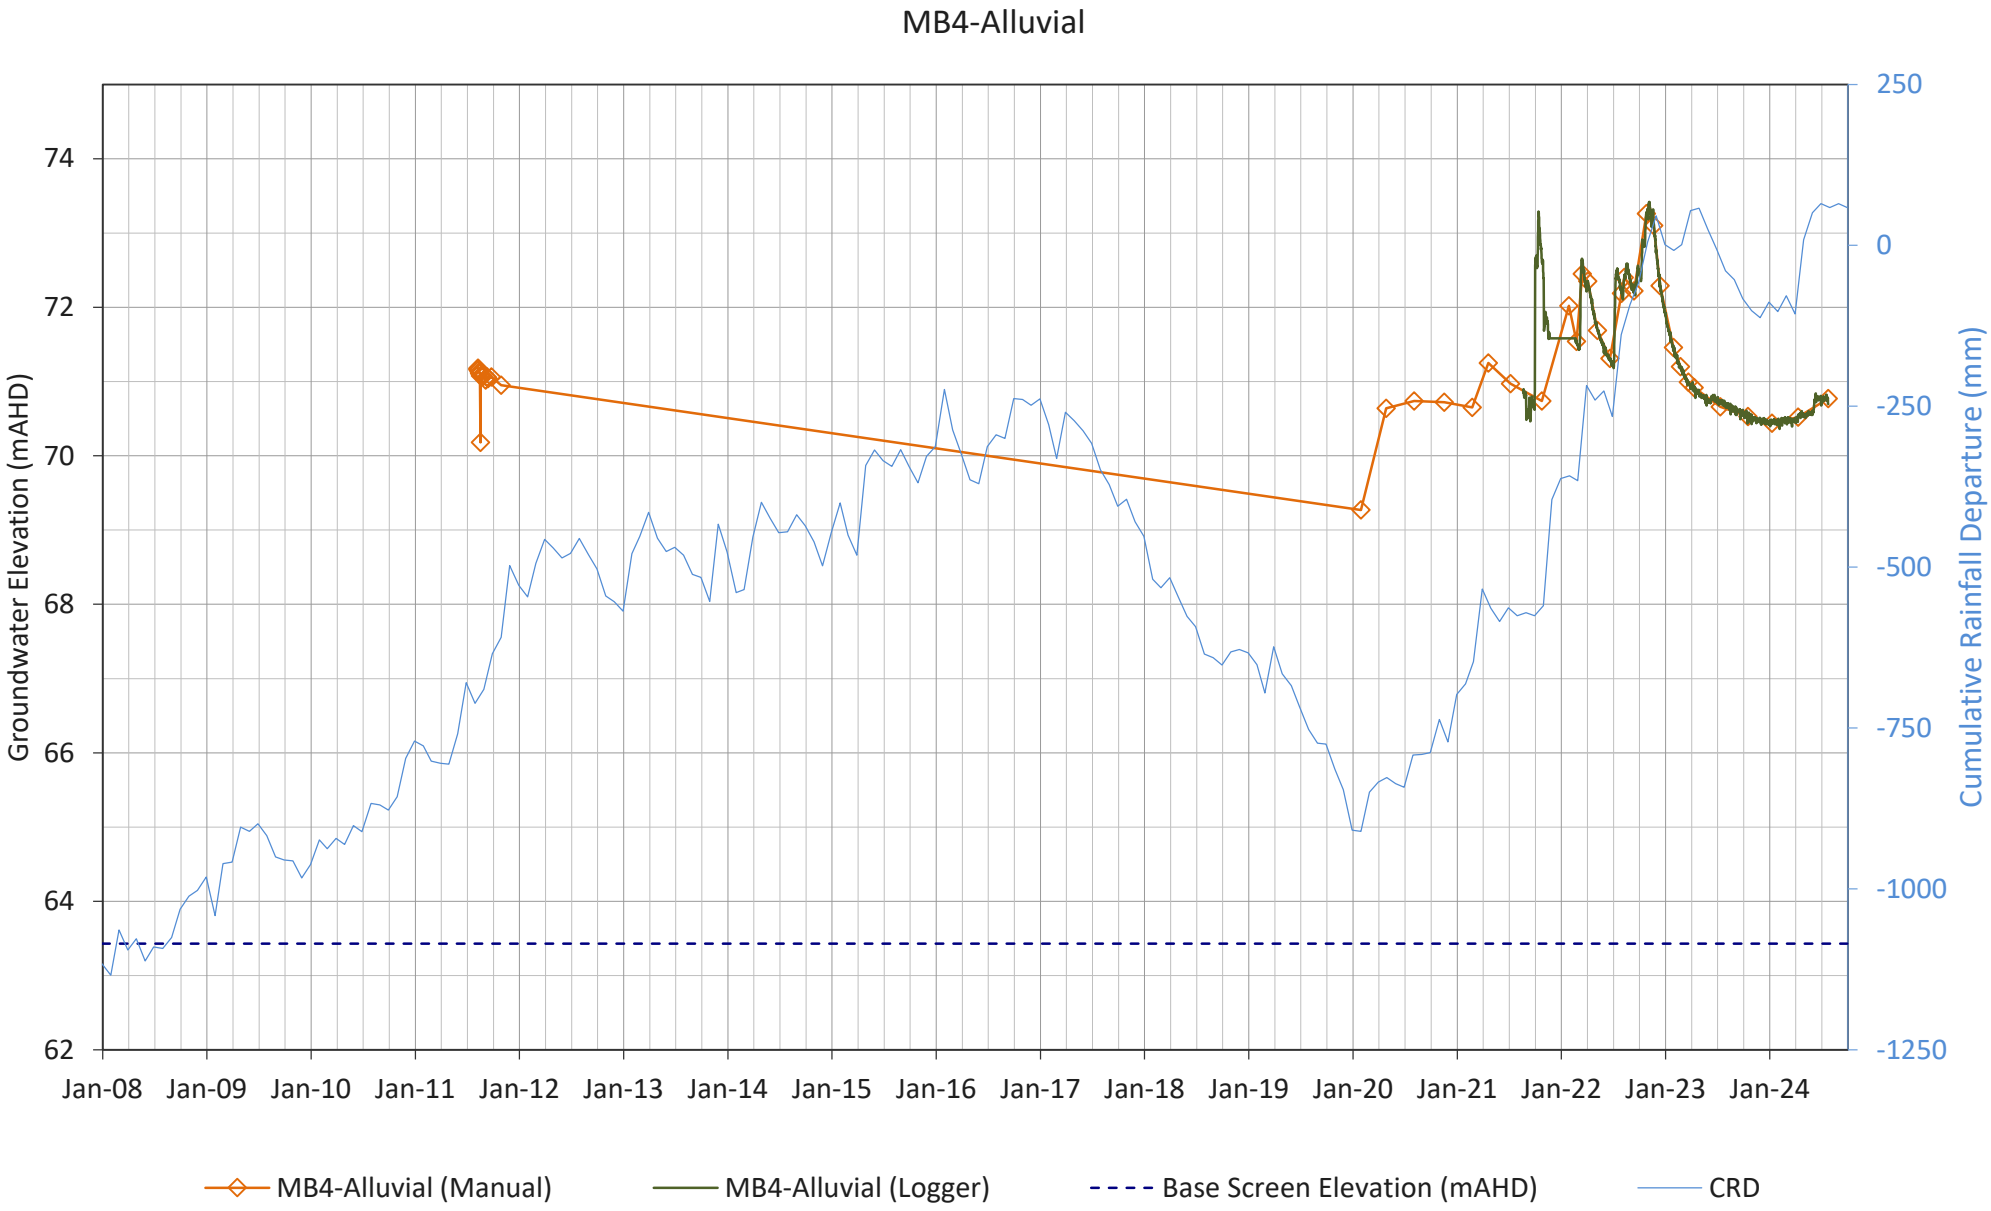
MB4-Alluvial
Groundwater Elevation (mAHD)
74
72
70
68
66
64
62
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB4-Alluvial (Manual)
MB4-Alluvial (Logger)
Base Screen Elevation (mAHD)
CRD

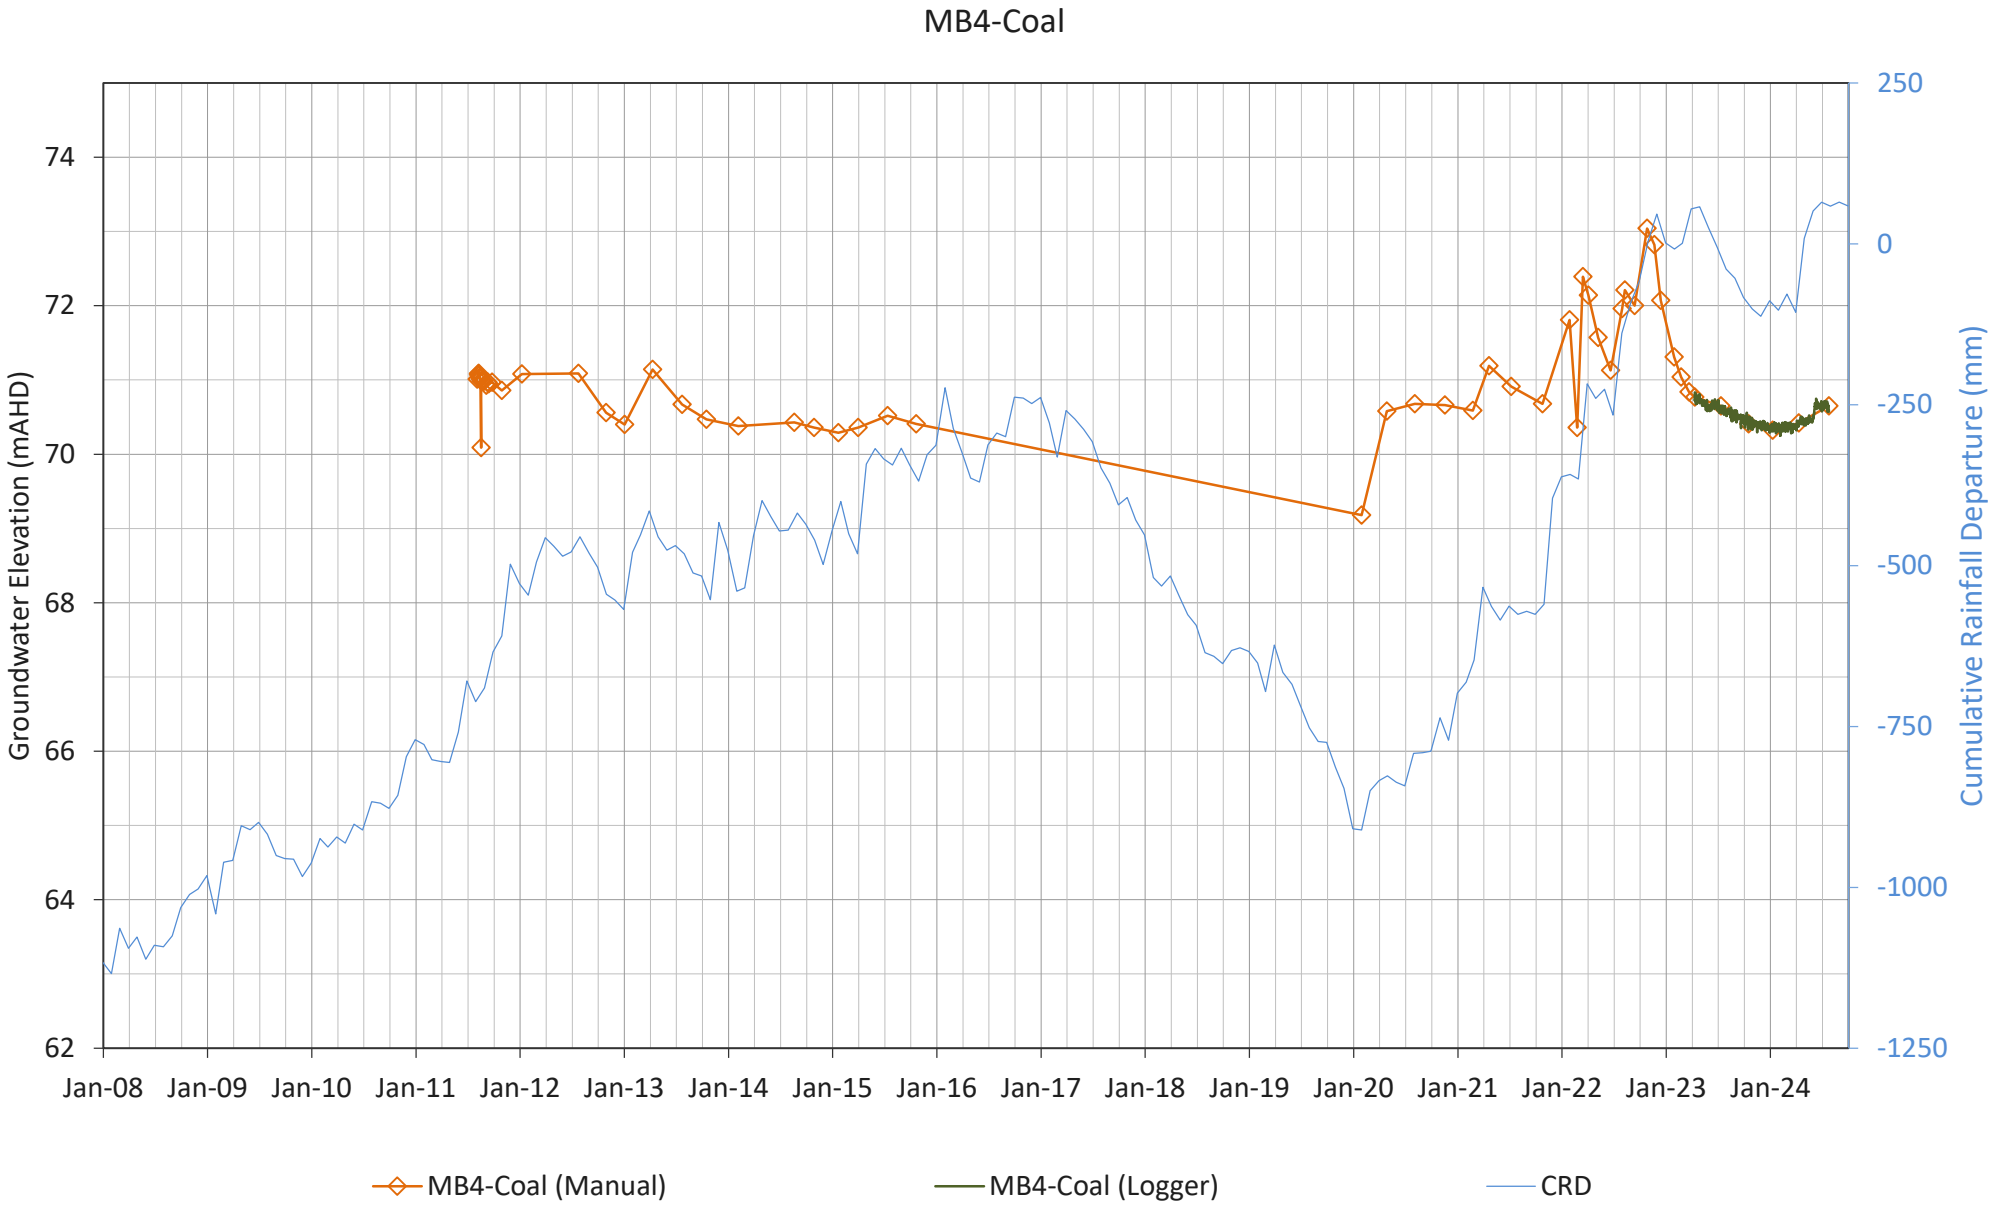
MB4-Coal
Groundwater Elevation (mAHD)
74
72
70
68
66
64
62
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB4-Coal (Manual)
MB4-Coal (Logger)
CRD

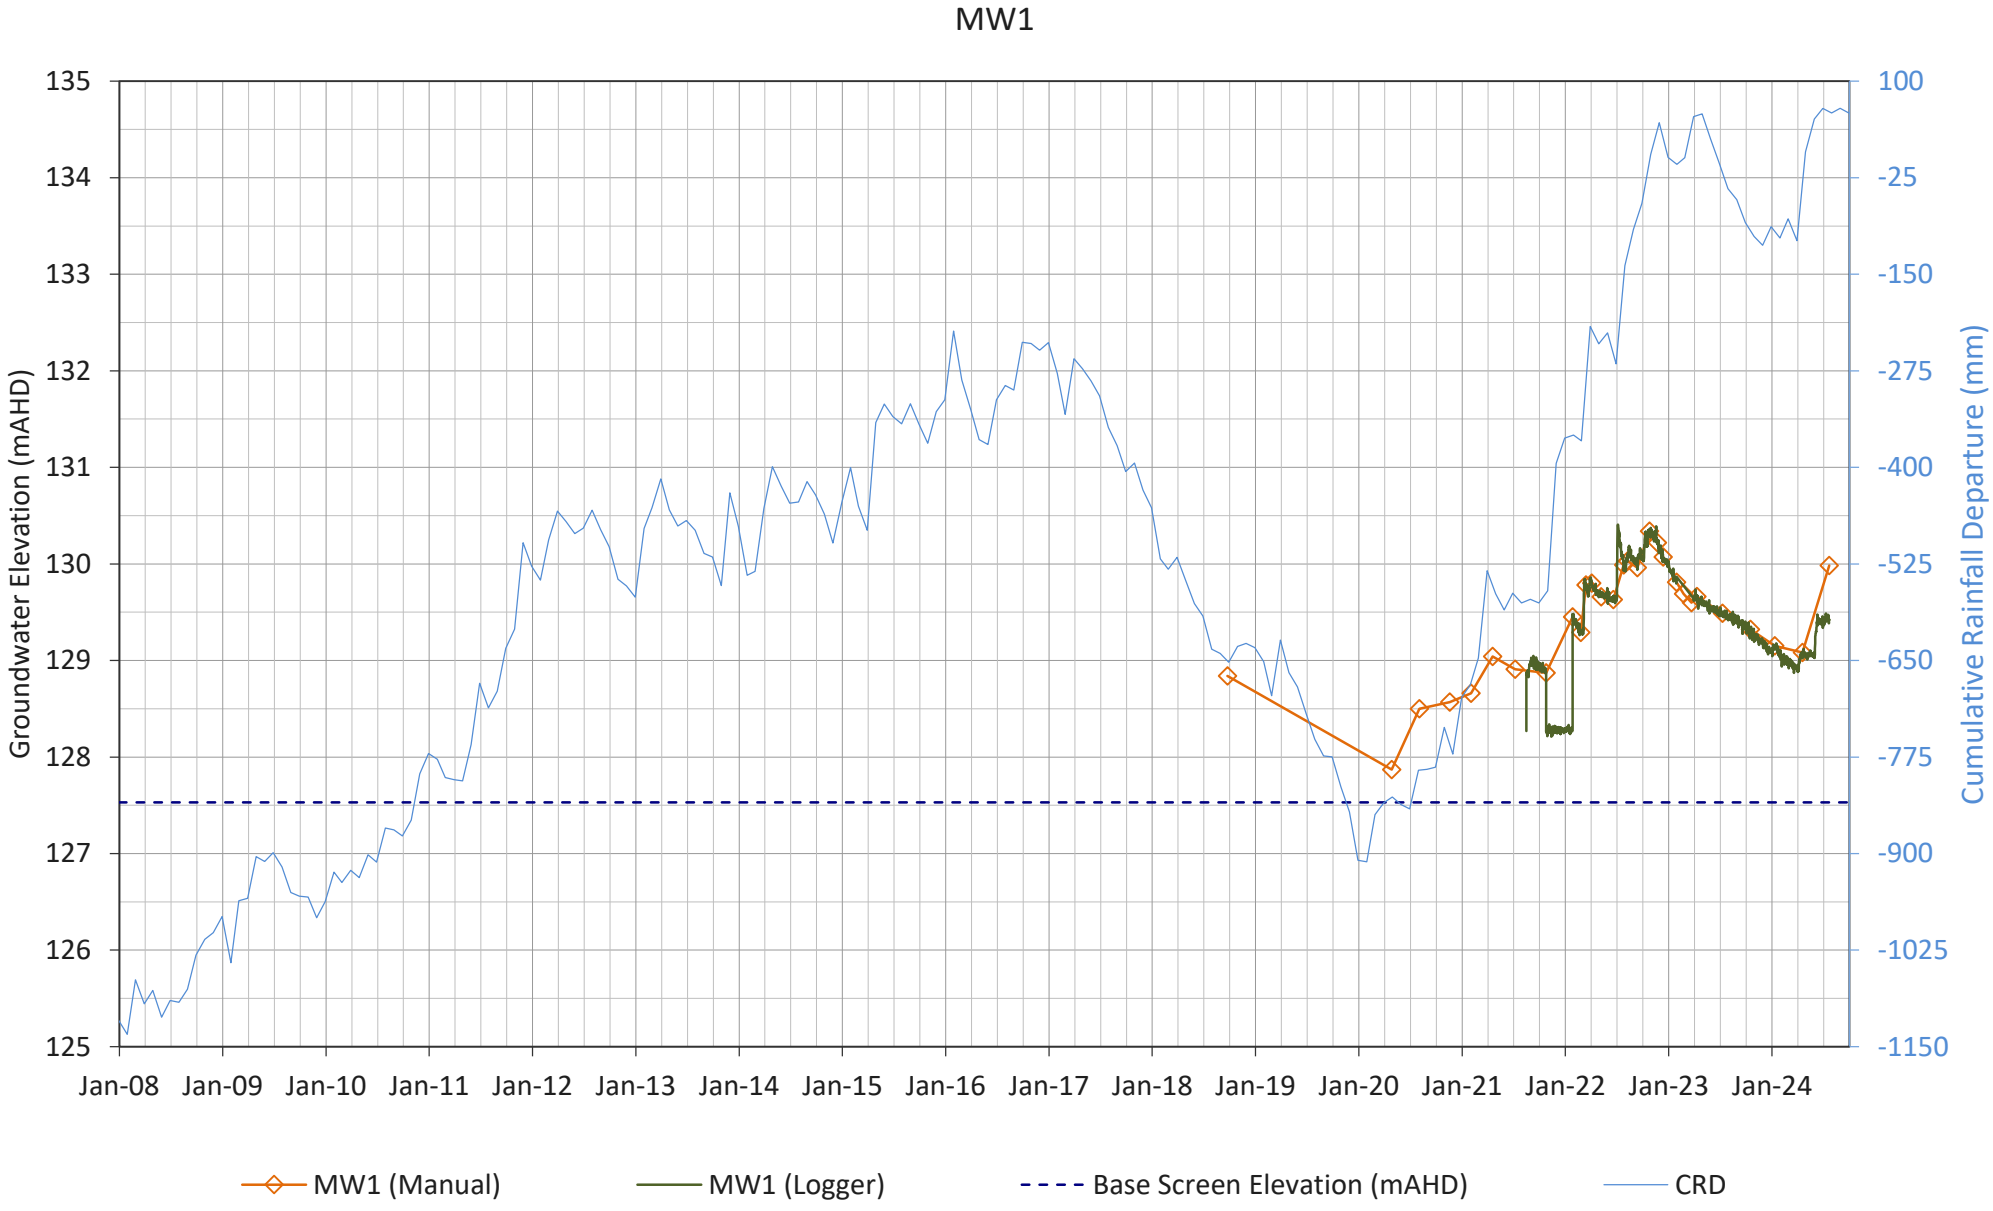
MW1
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
135
134
133
132
131
130
129
128
127
126
125
100
-25
-150
-275
-400
-525
-650
-775
-900
-1025
-1150
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MW1 (Manual)
MW1 (Logger)
Base Screen Elevation (mAHD)
CRD

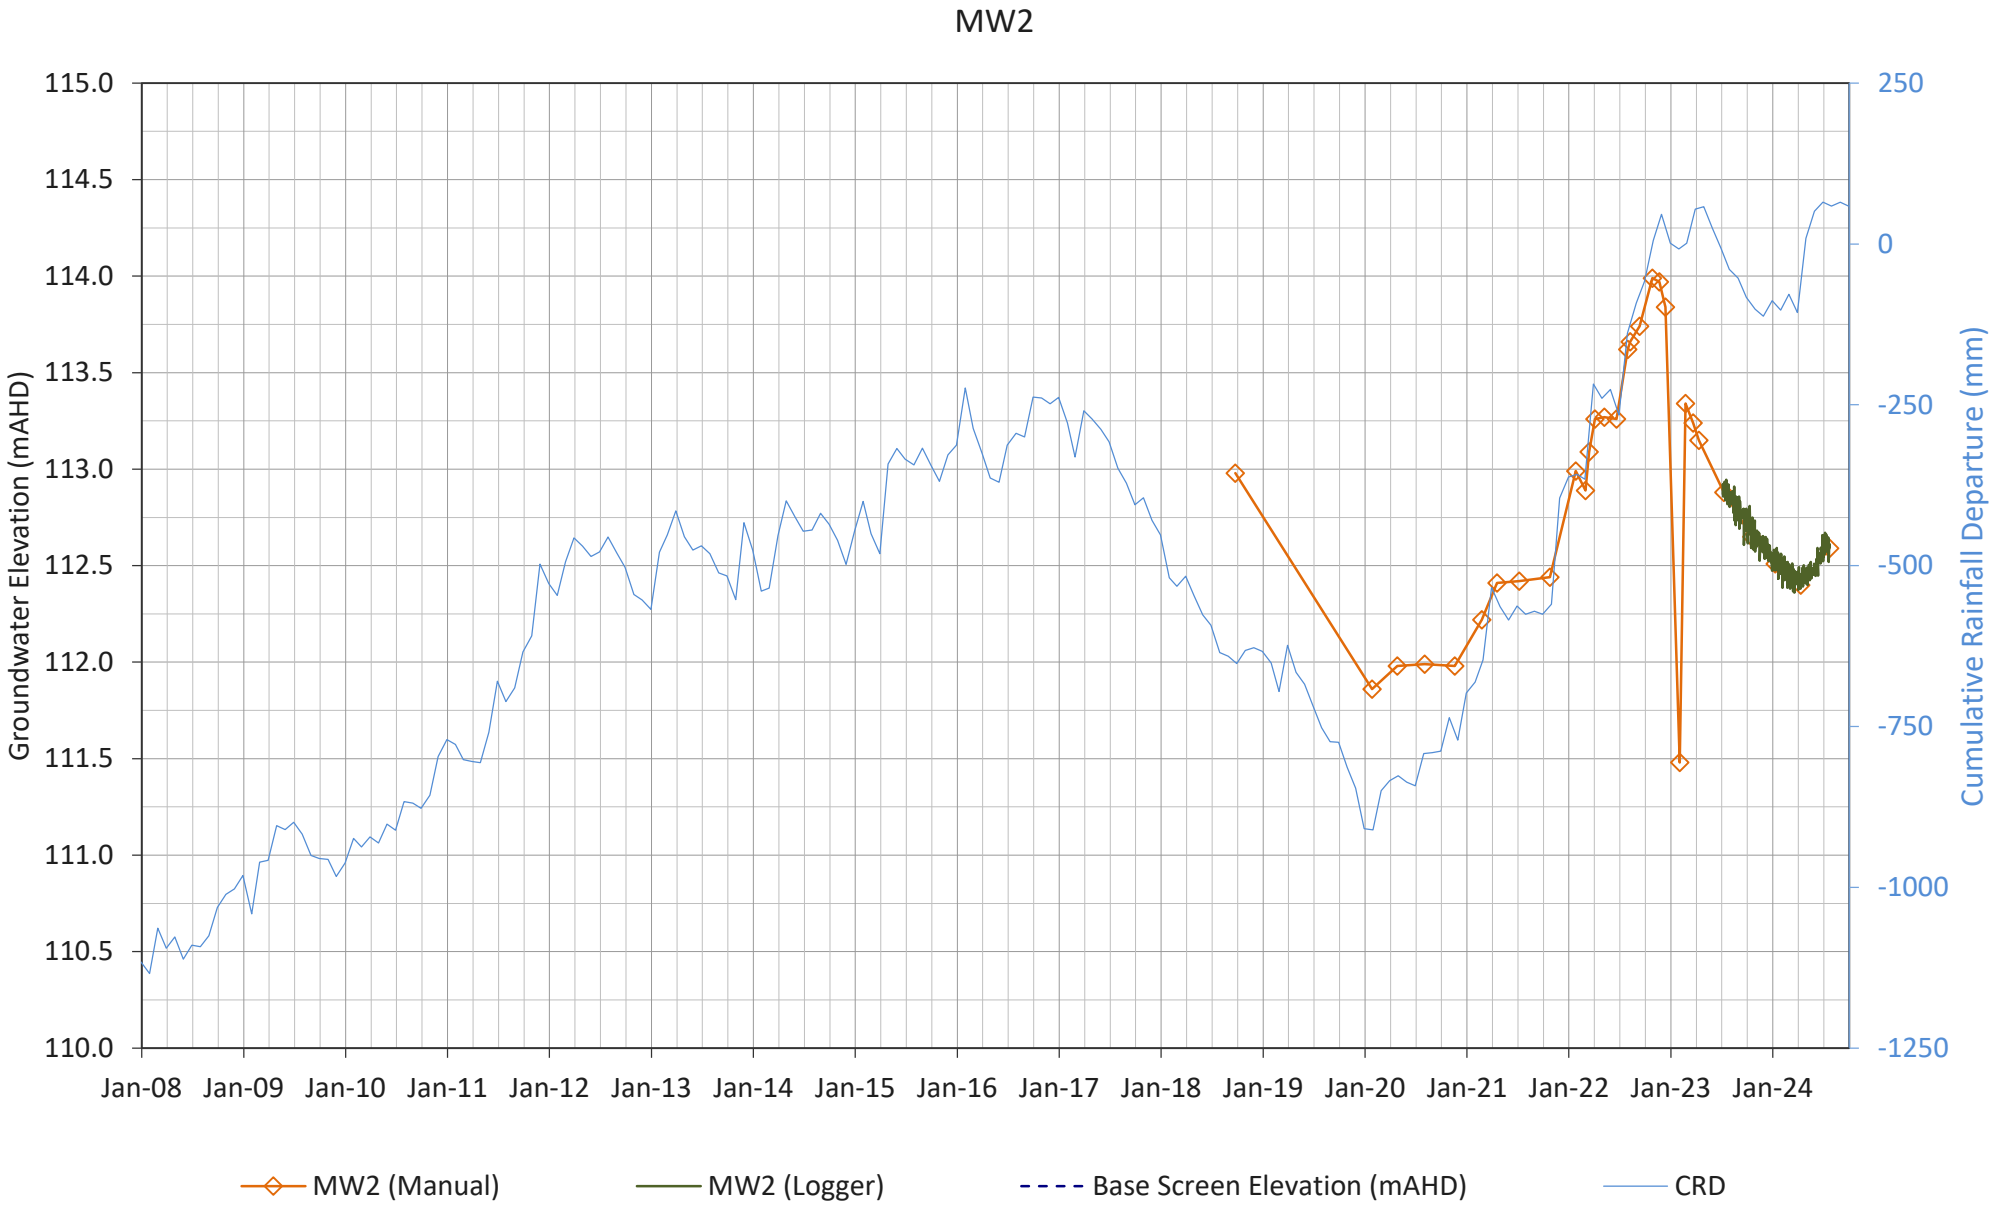
MW2
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
115.0
114.5
114.0
113.5
113.0
112.5
112.0
111.5
111.0
110.5
110.0
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MW2 (Manual)
MW2 (Logger)
Base Screen Elevation (mAHD)
CRD

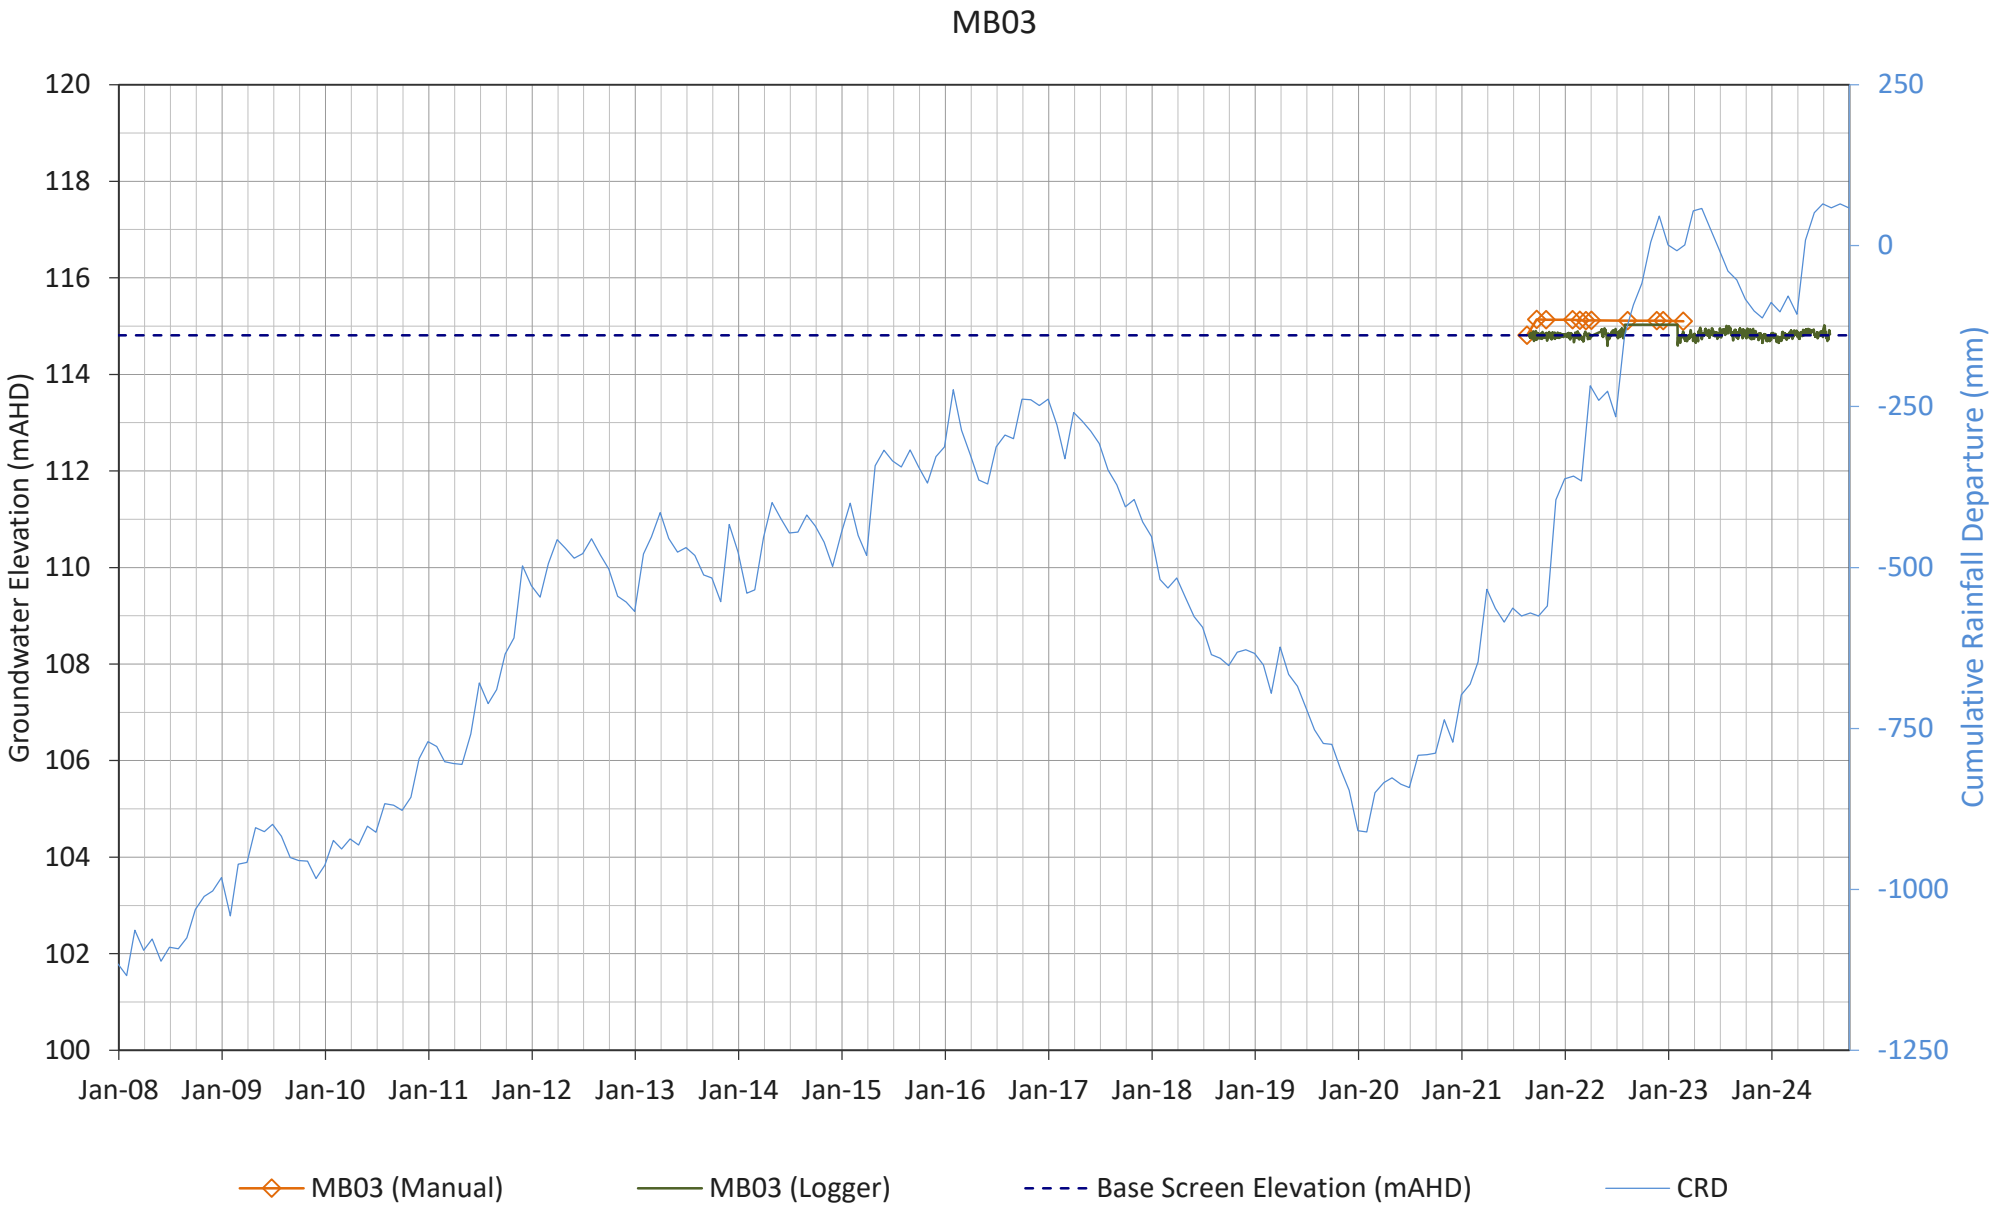
MB03
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
120
118
116
114
112
110
108
106
104
102
100
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB03 (Manual)
MB03 (Logger)
Base Screen Elevation (mAHD)
CRD

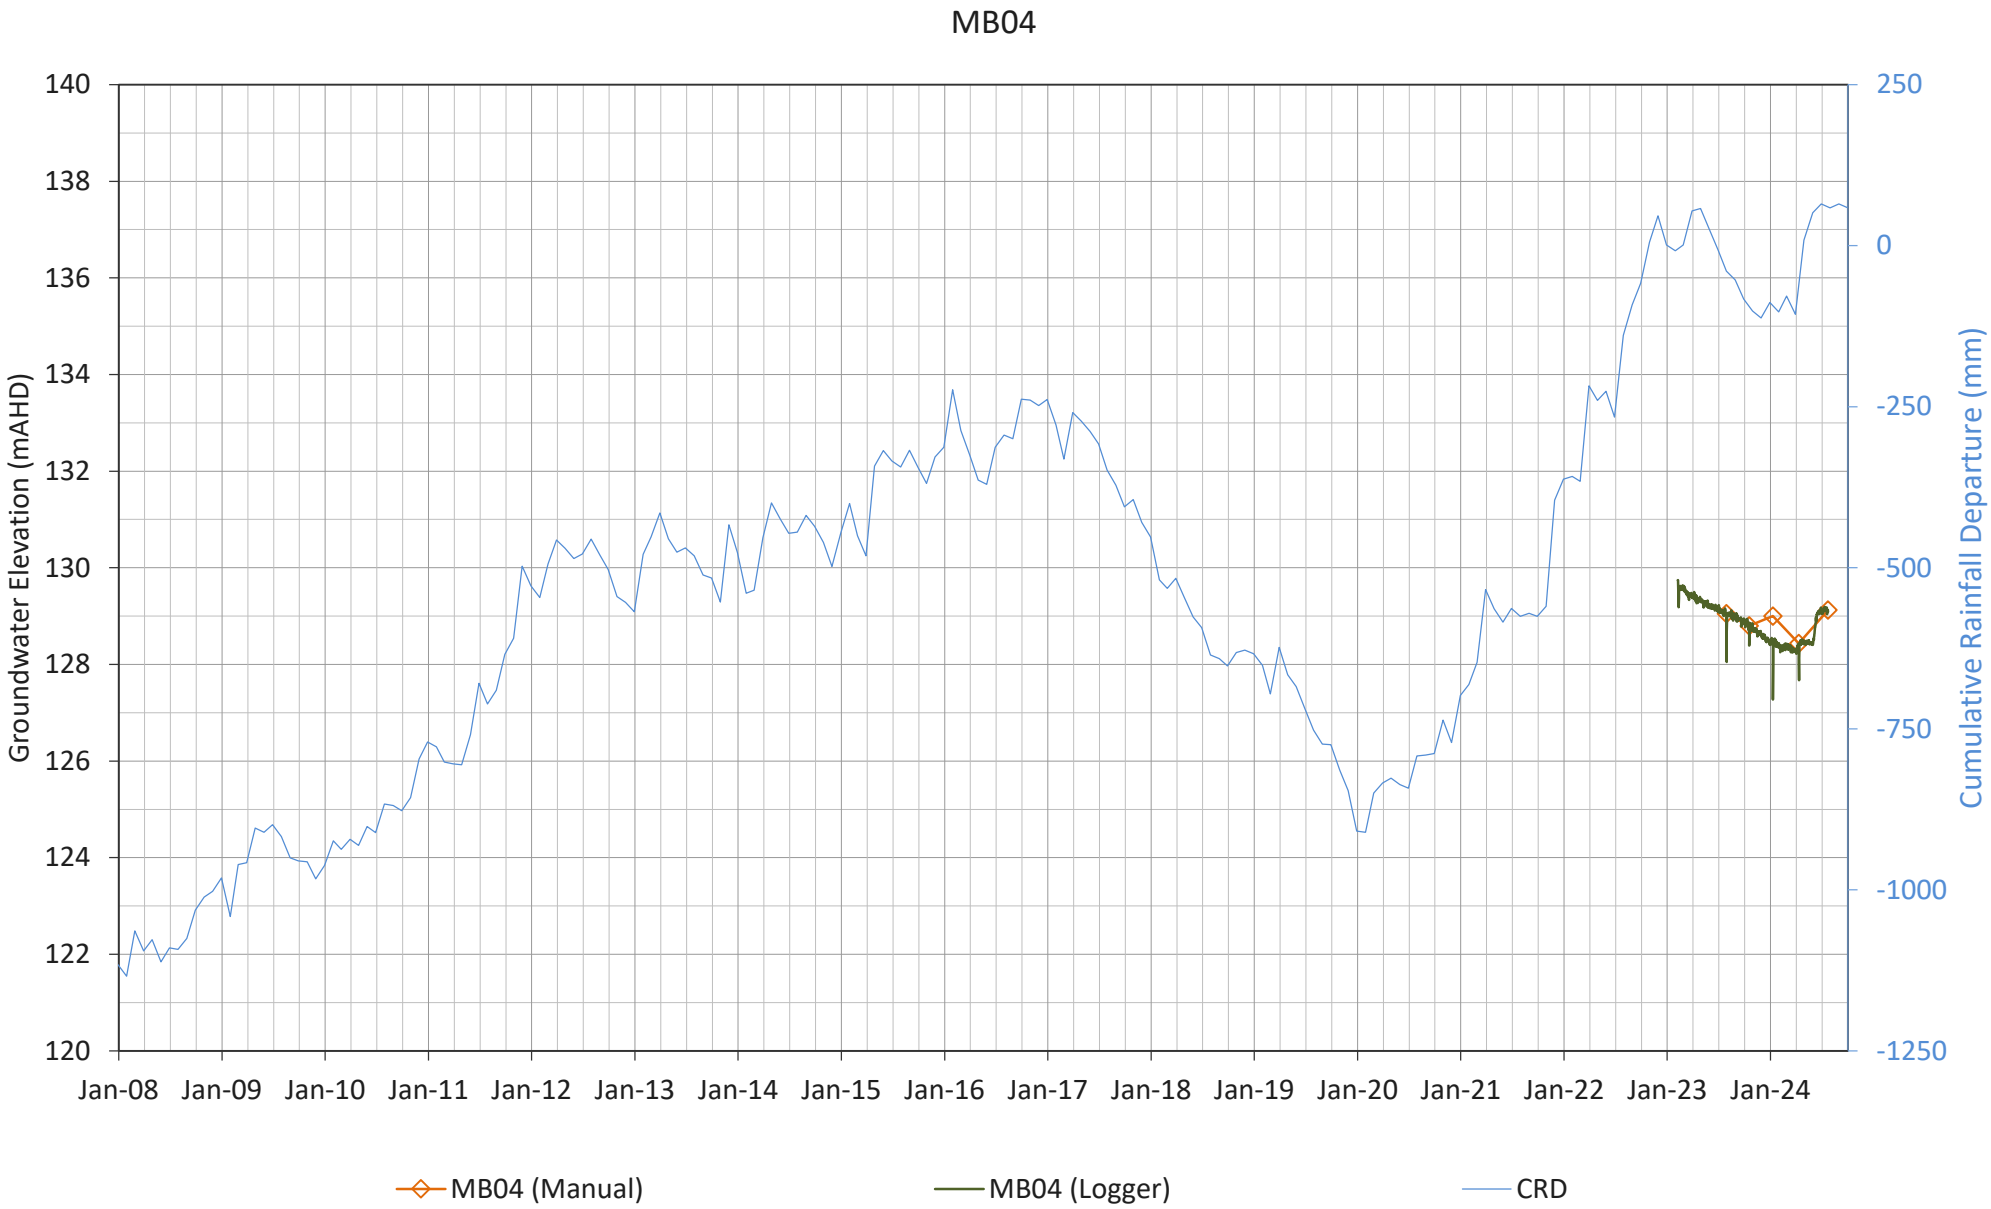
MB04
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
140
138
136
134
132
130
128
126
124
122
120
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB04 (Manual)
MB04 (Logger)
CRD

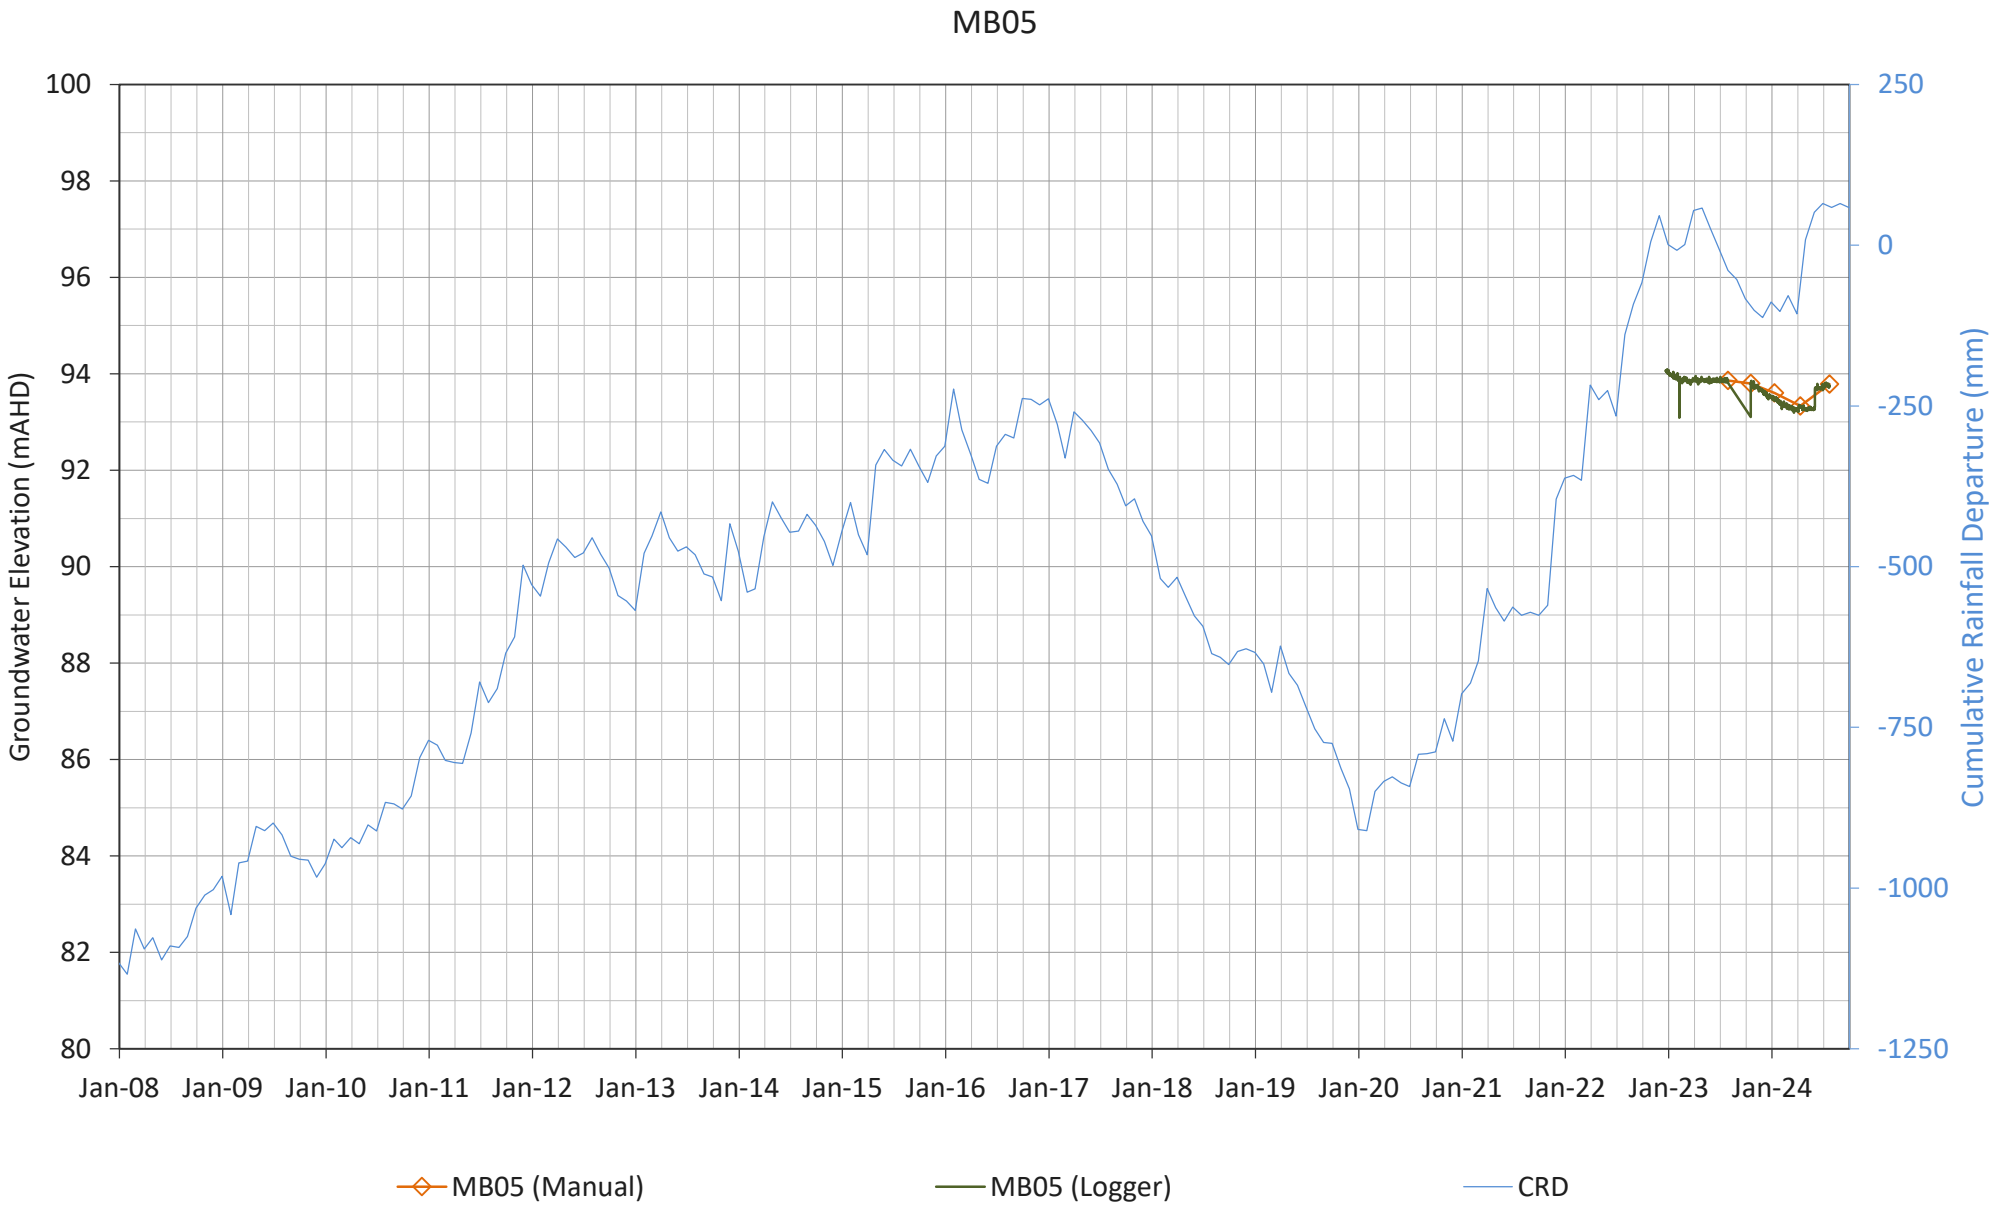
MB05
Groundwater Elevation (mAHD)
Cumulative Rainfall Departure (mm)
100
98
96
94
92
90
88
86
84
82
80
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB05 (Manual)
MB05 (Logger)
CRD

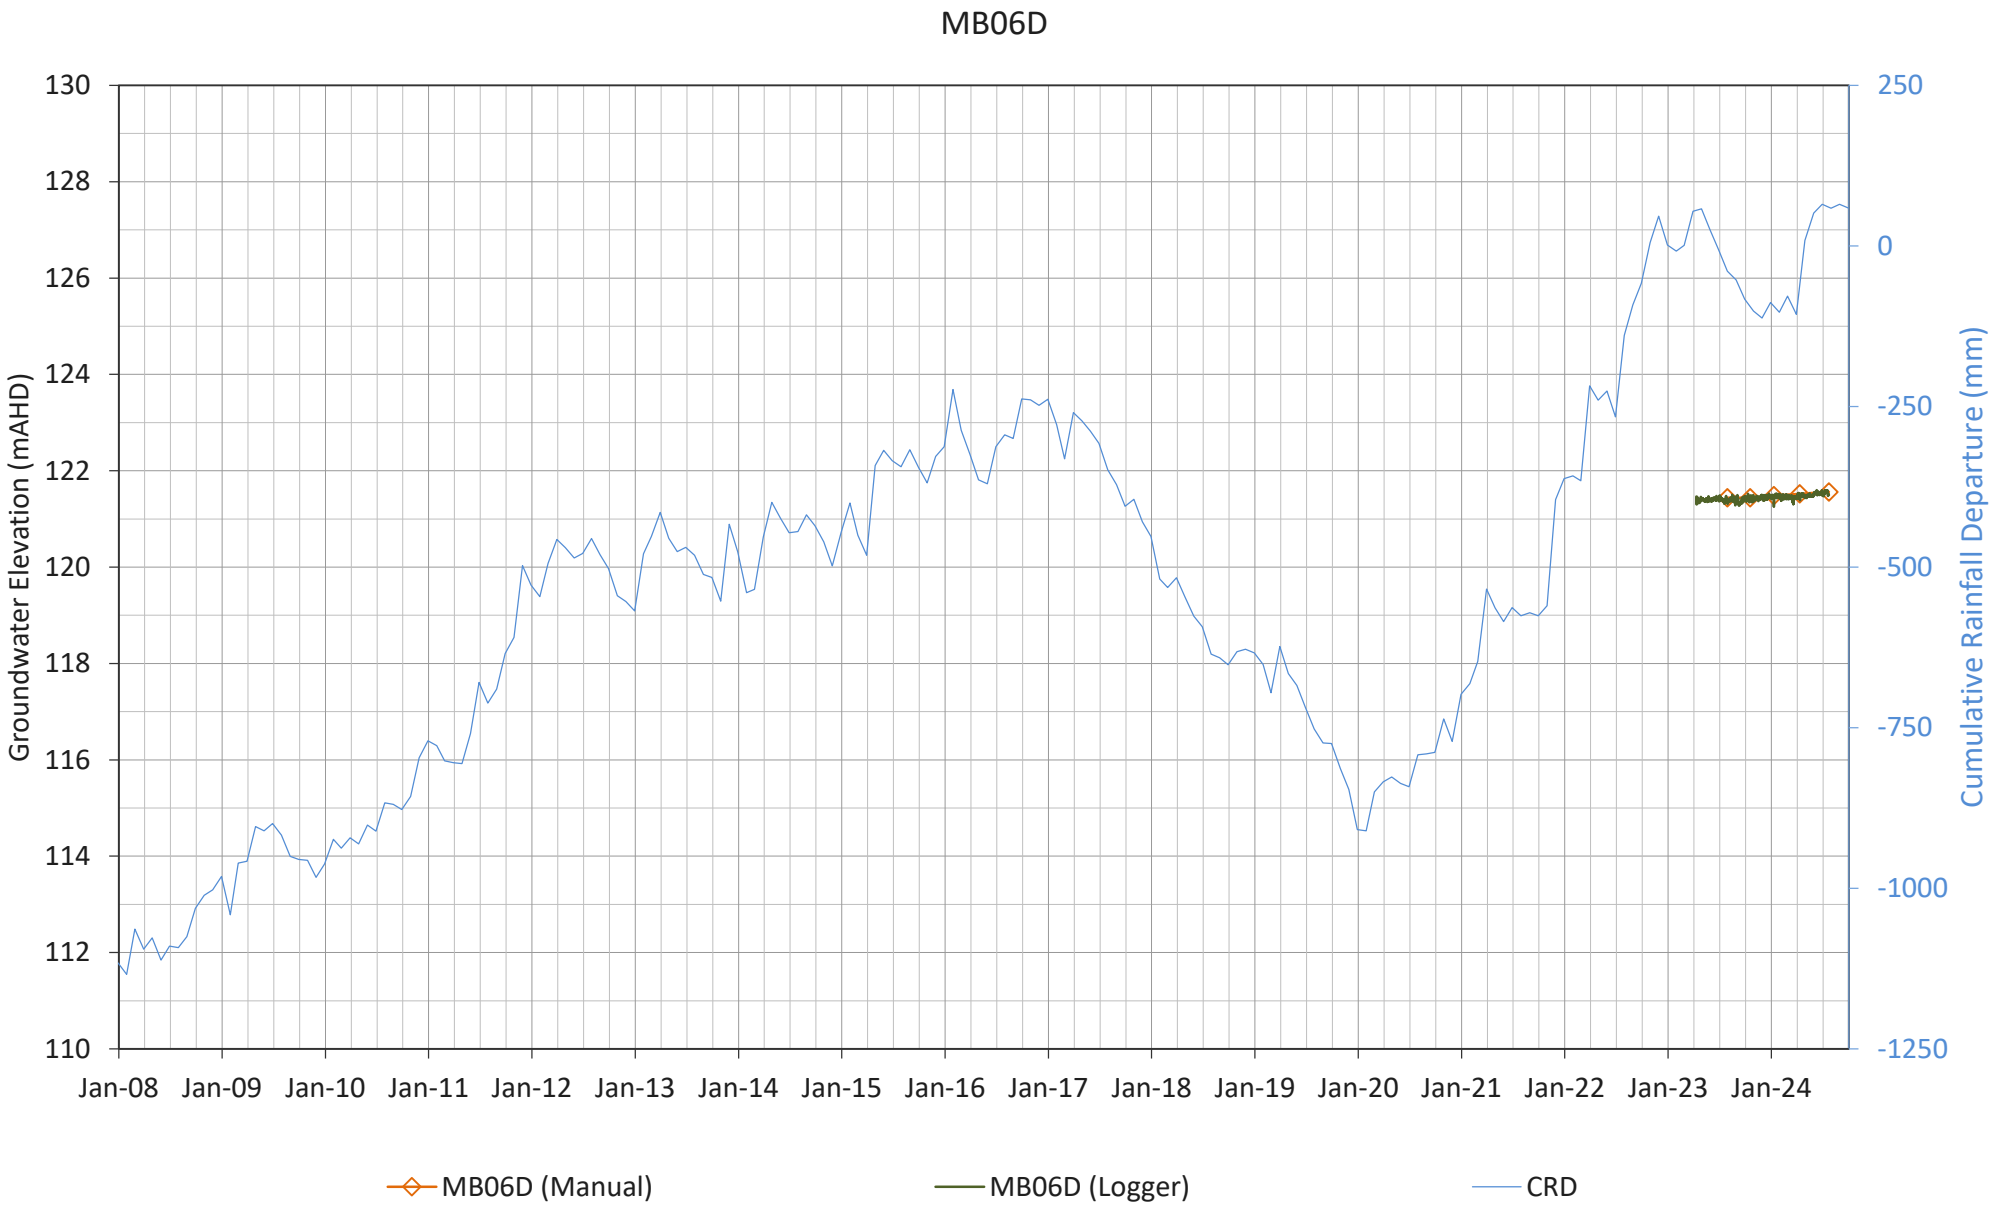
MB06D
Groundwater Elevation (mAHD)
130
128
126
124
122
120
118
116
114
112
110
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB06D (Manual)
MB06D (Logger)
CRD

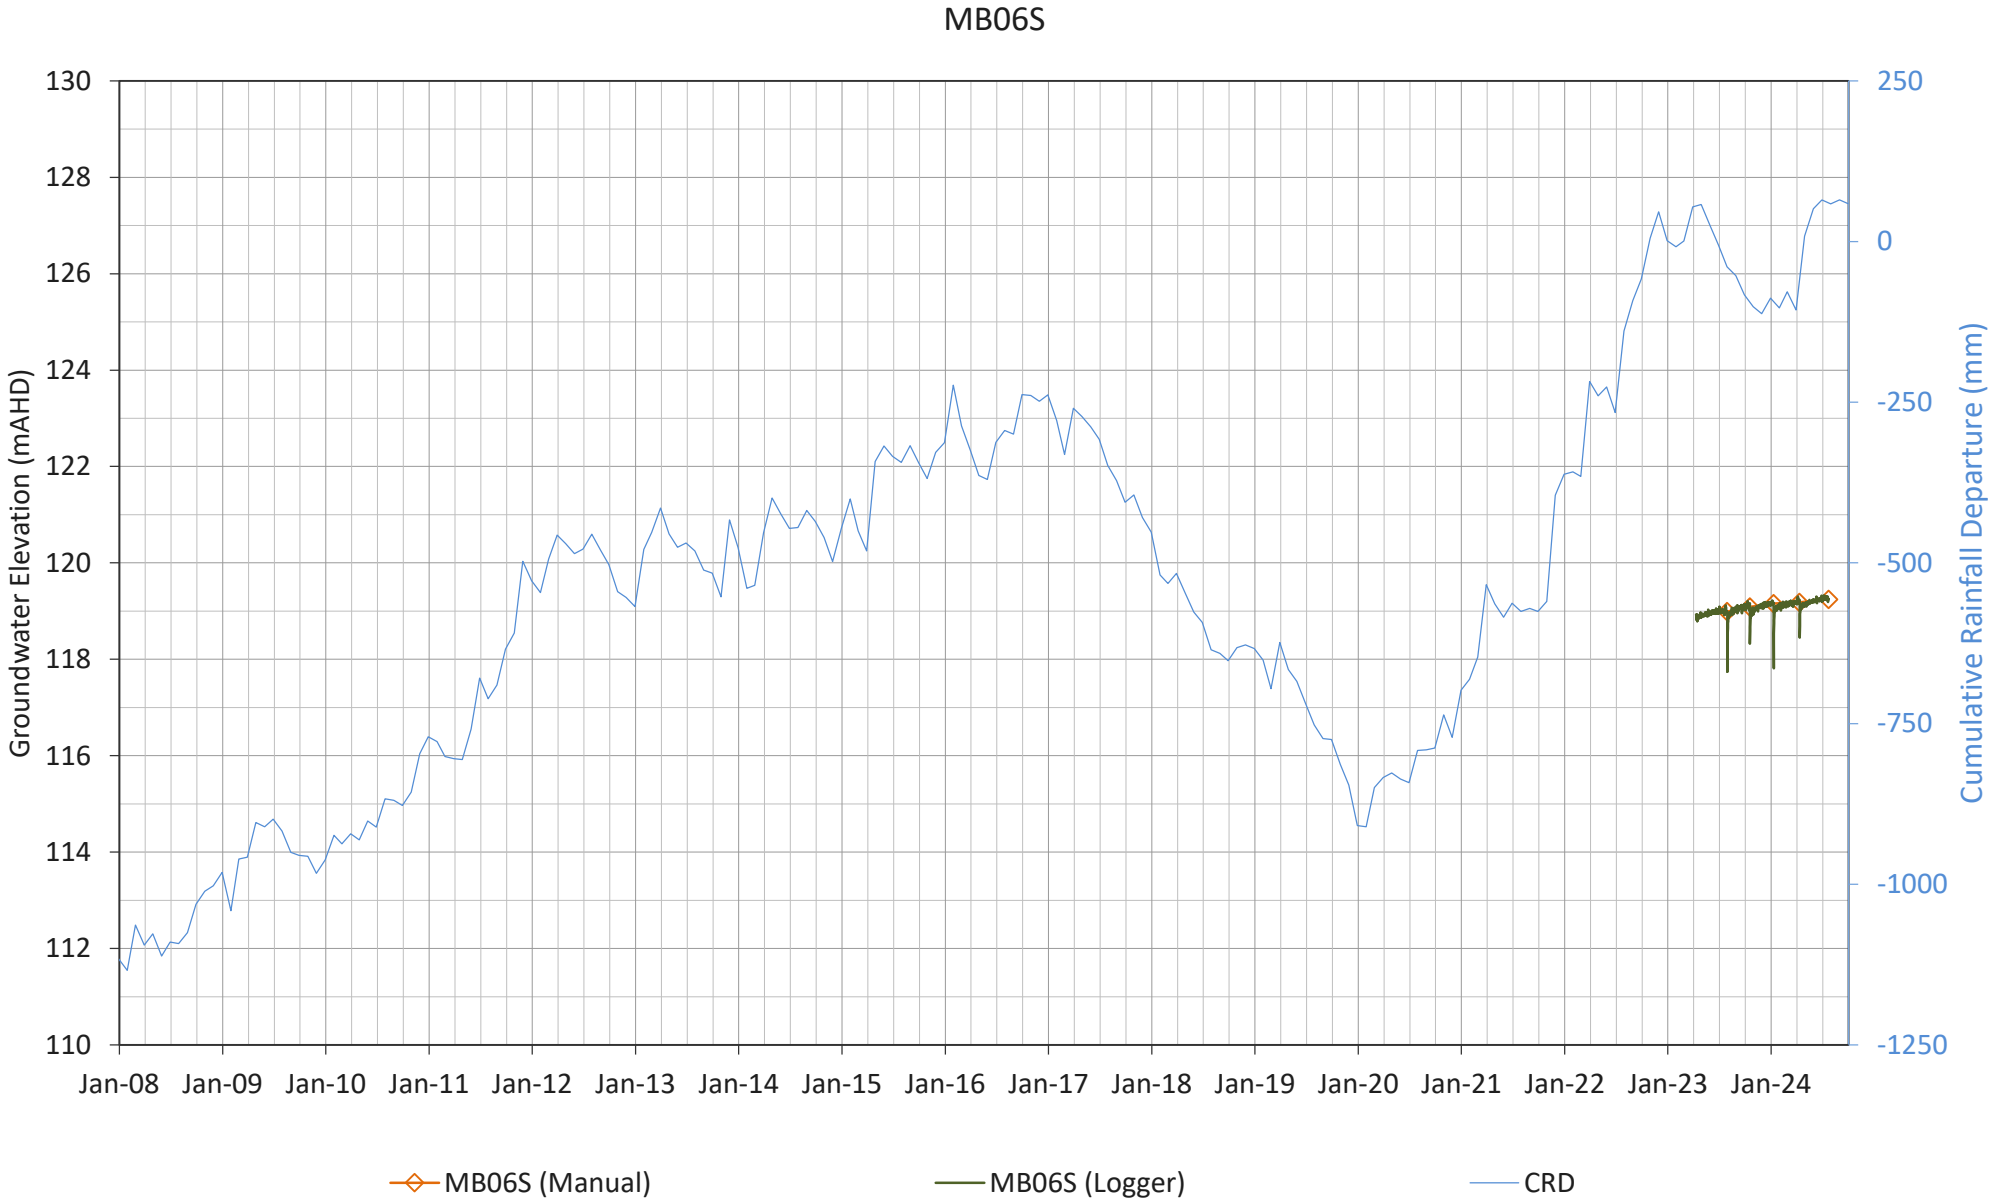
MB06S
Groundwater Elevation (mAHD)
130
128
126
124
122
120
118
116
114
112
110
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
250
0
-250
-500
-750
-1000
-1250
Cumulative Rainfall Departure (mm)
MB06S (Manual)
MB06S (Logger)
CRD

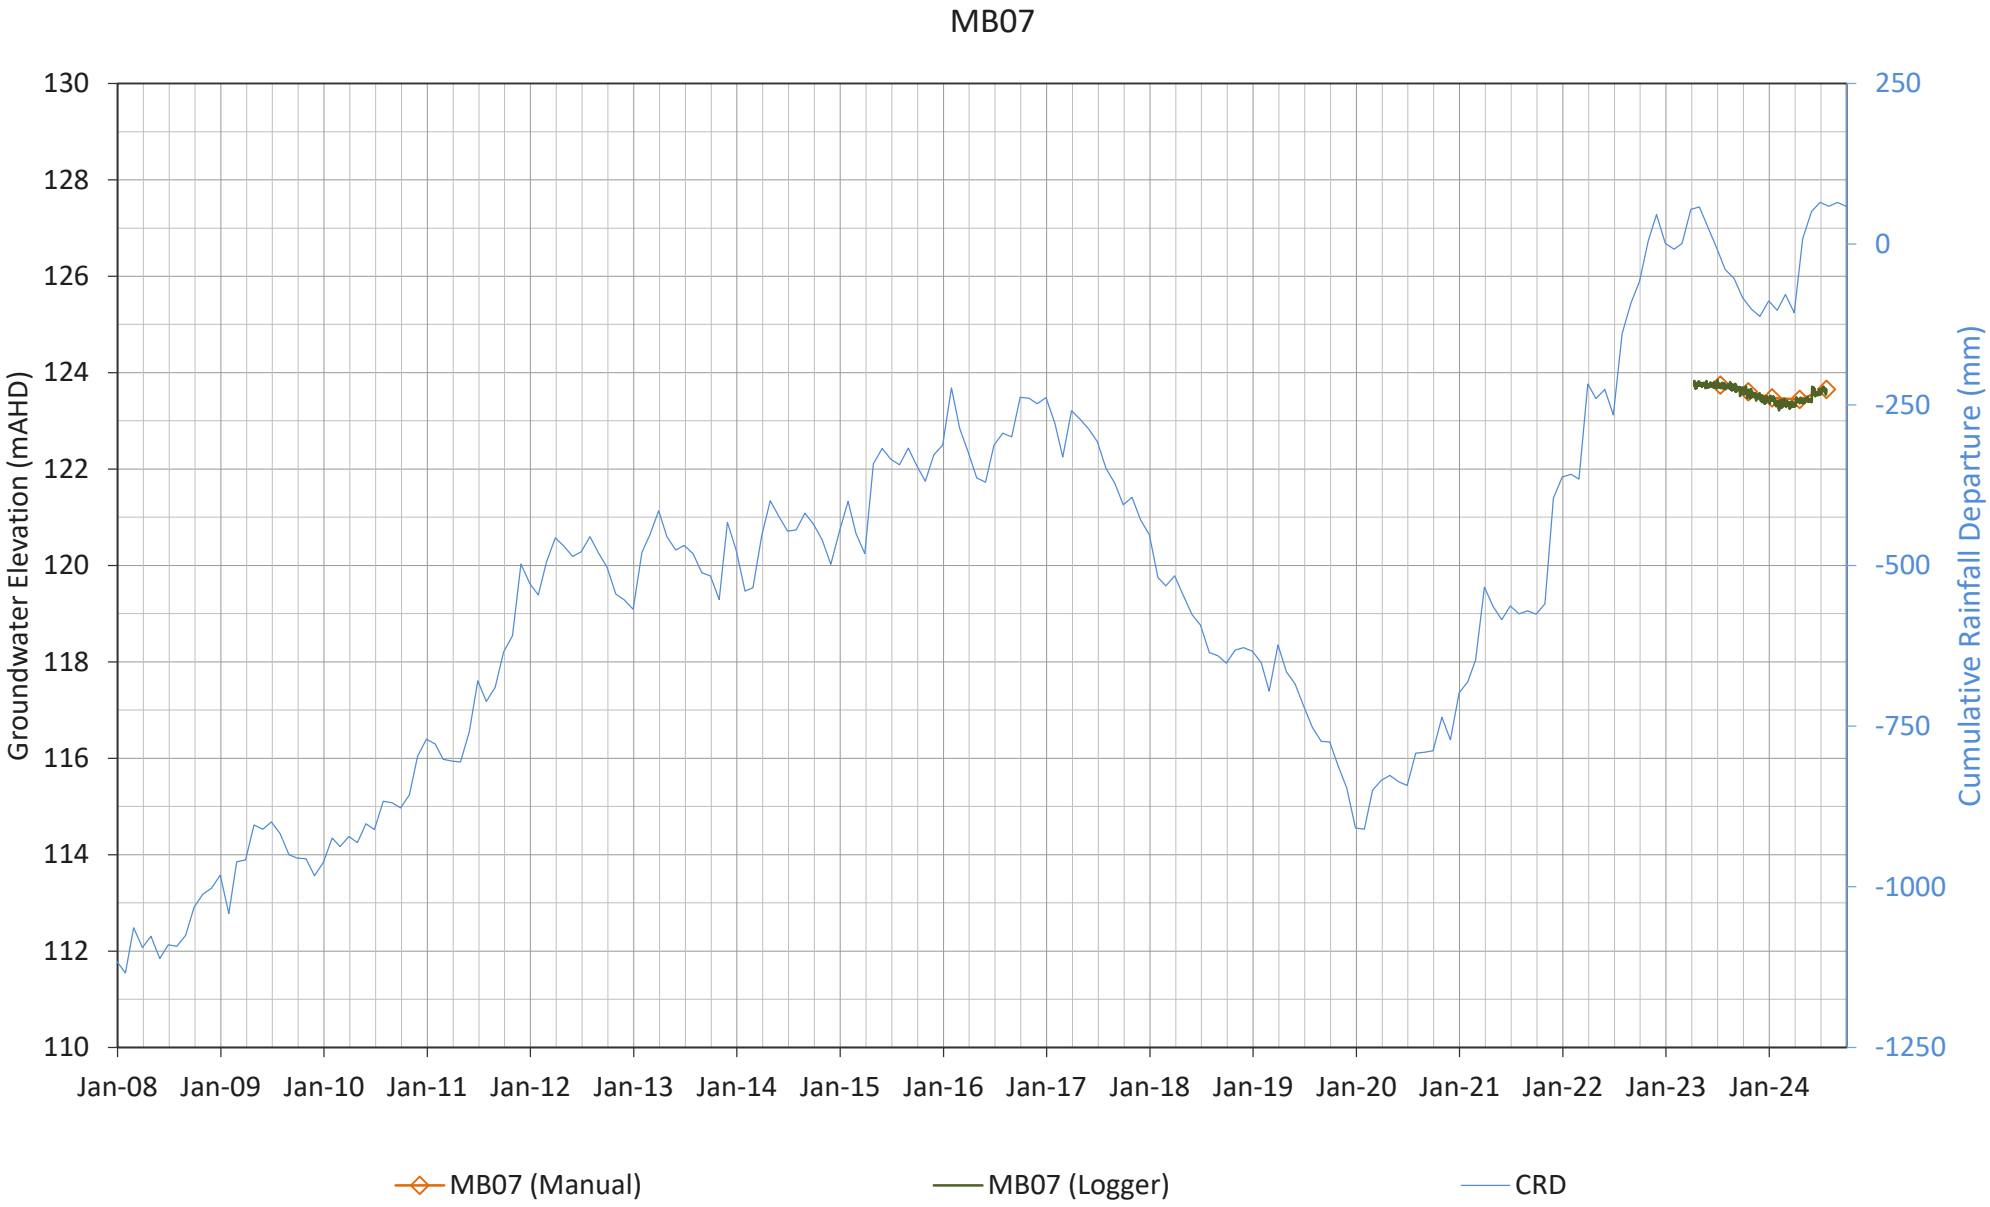
MB07
Groundwater Elevation (mAHD)
130
128
126
124
122
120
118
116
114
112
110
Cumulative Rainfall Departure (mm)
250
0
-250
-500
-750
-1000
-1250
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
MB07 (Manual)
MB07 (Logger)
CRD

Appendix C Groundwater Quality and Trigger Levels (only sites within the TARP)

Maxwell Underground Mine

Groundwater Monitoring Report – Quarter 3 – 2024

Malabar Resources Pty Ltd

SLR Project No.: 610.031830.00001

28 November 2024

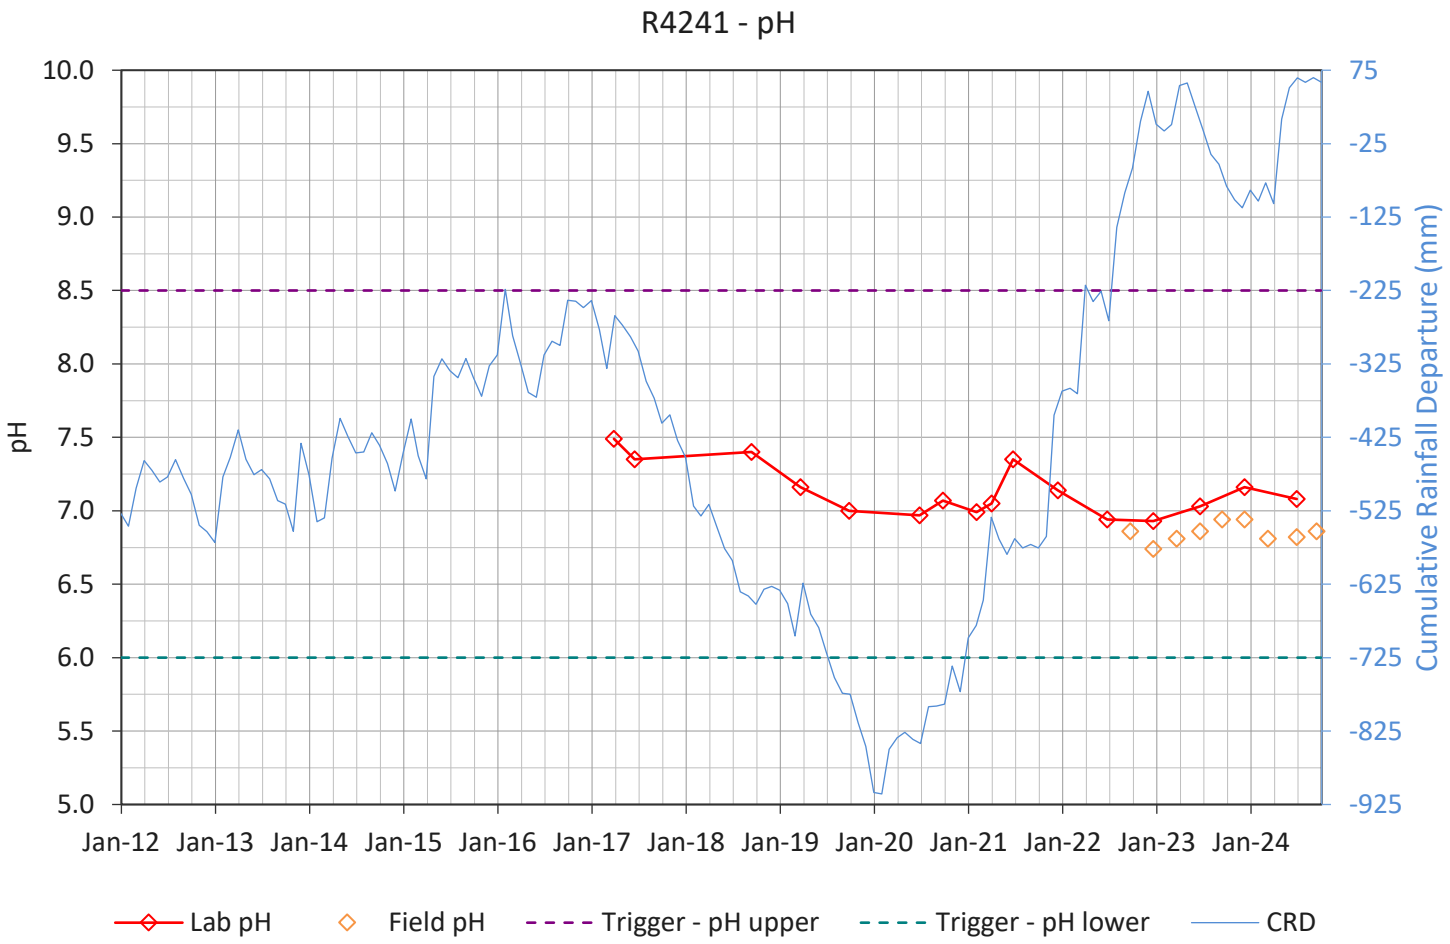
R4241 - pH
10.0
9.5
9.0
8.5
8.0
7.5
7.0
6.5
6.0
5.5
5.0
pH
75
-25
-125
-225
-325
-425
-525
-625
-725
-825
-925
Cumulative Rainfall Departure (mm)
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab pH
Field pH
Trigger - pH upper
Trigger - pH lower
CRD

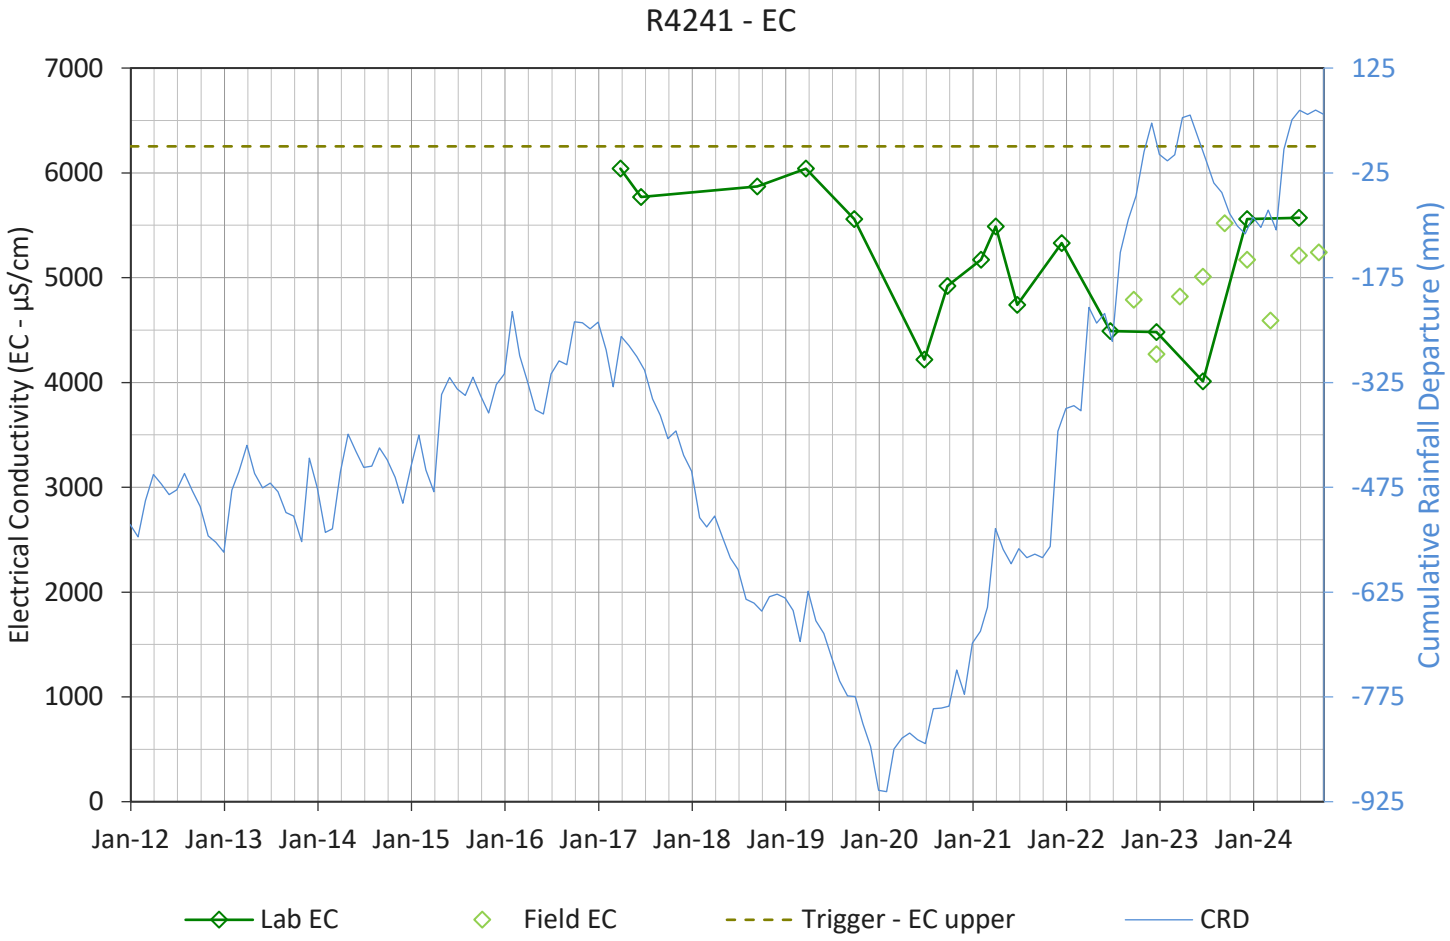
R4241 - EC
7000
6000
5000
4000
3000
2000
1000
0
Electrical Conductivity (EC - µS/cm)
125
-25
-175
-325
-475
-625
-775
-925
Cumulative Rainfall Departure (mm)
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab EC
Field EC
Trigger - EC upper
CRD

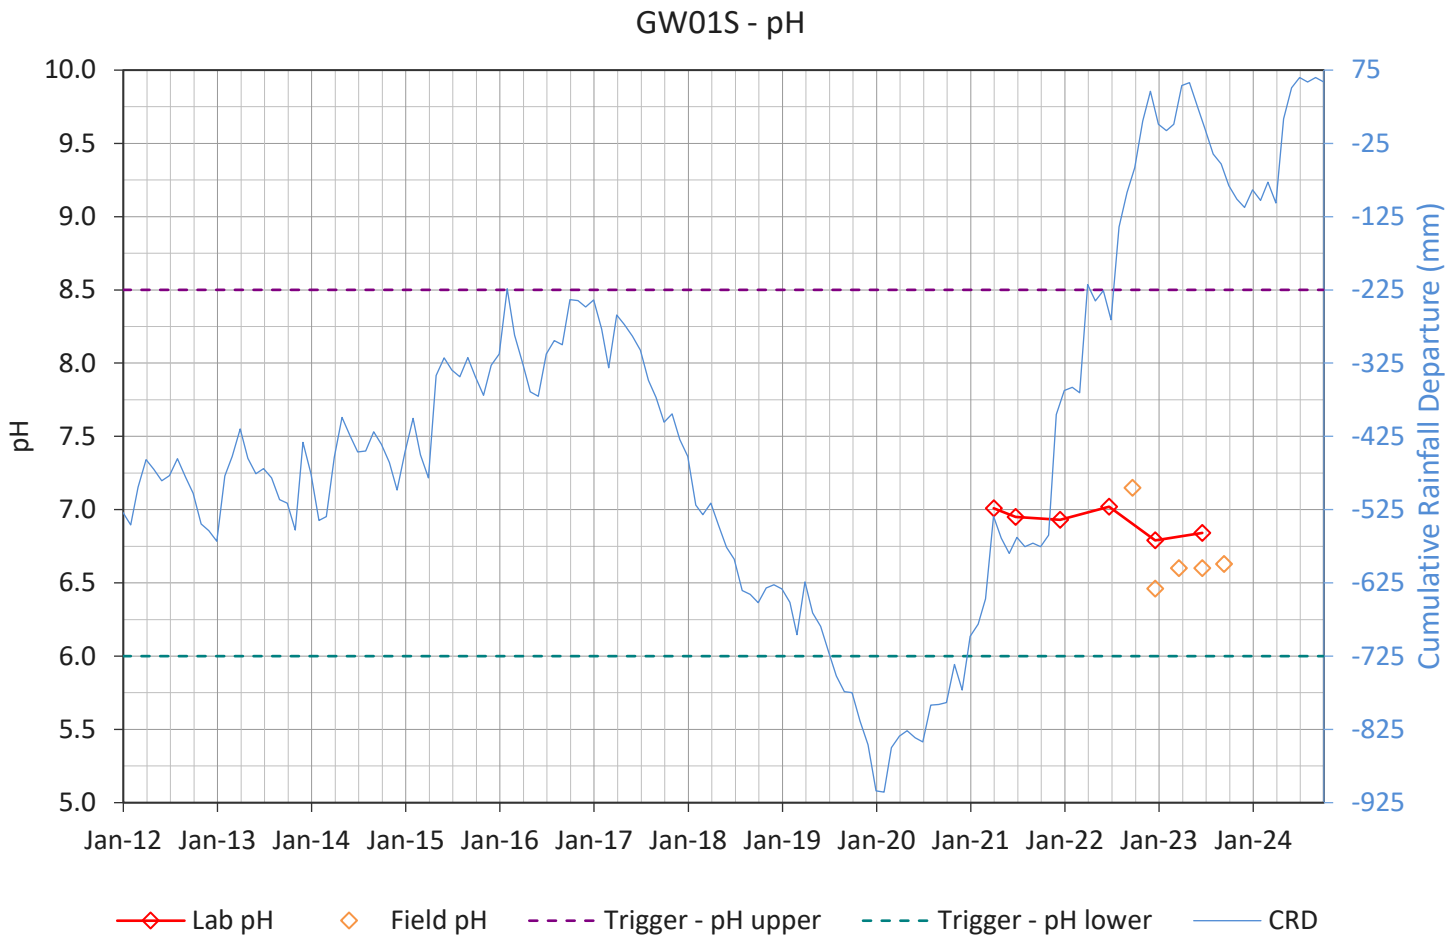
GW01S - pH
pH
Cumulative Rainfall Departure (mm)
10.0
9.5
9.0
8.5
8.0
7.5
7.0
6.5
6.0
5.5
5.0
75
-25
-125
-225
-325
-425
-525
-625
-725
-825
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab pH
Field pH
Trigger - pH upper
Trigger - pH lower
CRD

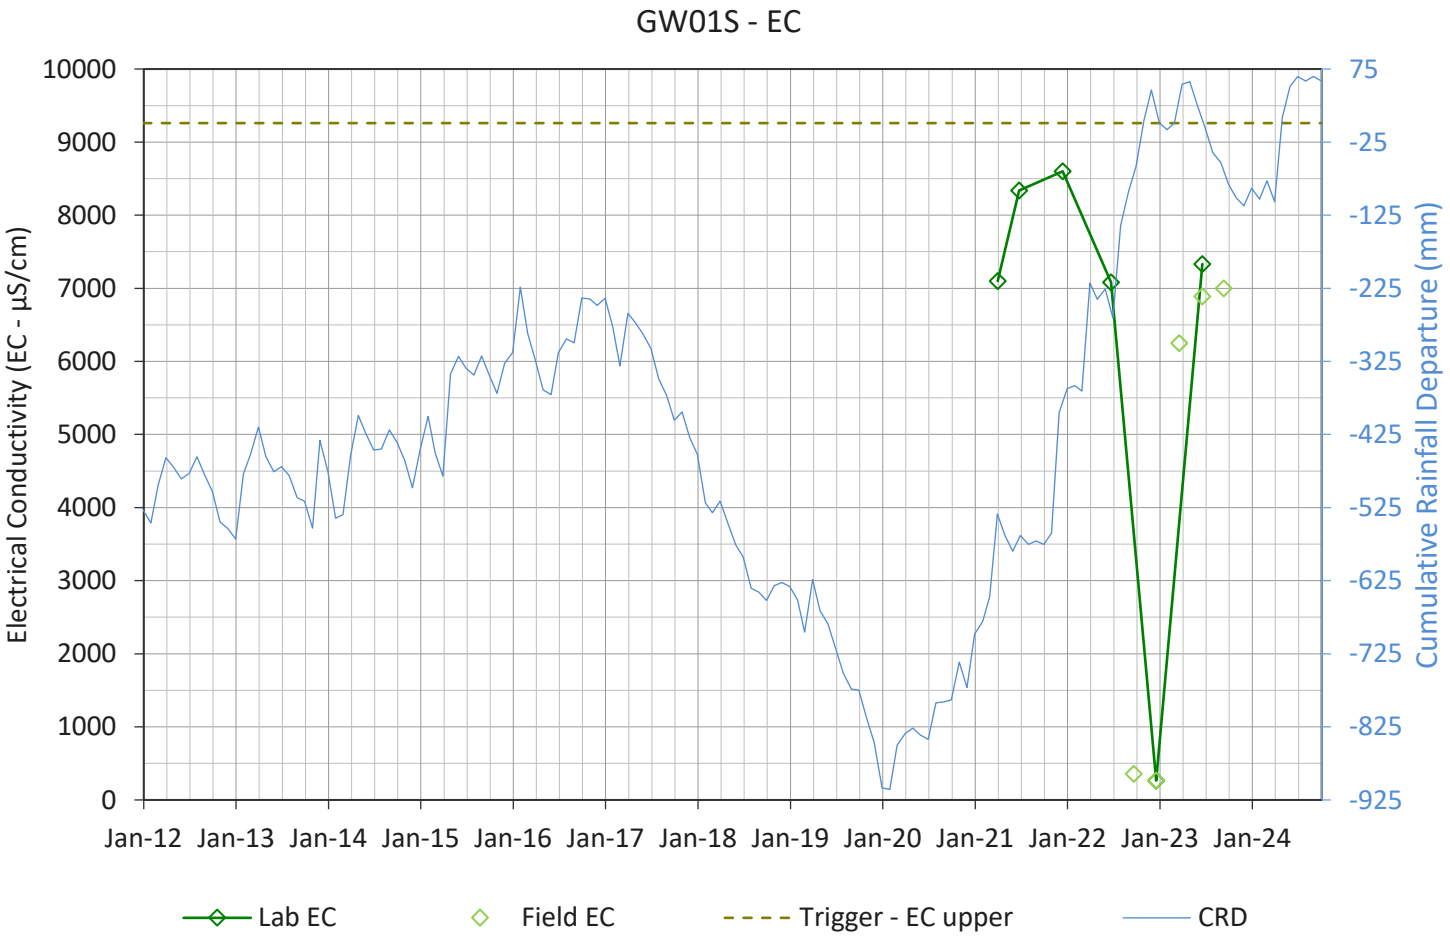
GW01S - EC
Electrical Conductivity (EC - µS/cm)
Cumulative Rainfall Departure (mm)
10000
9000
8000
7000
6000
5000
4000
3000
2000
1000
0
75
-25
-125
-225
-325
-425
-525
-625
-725
-825
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab EC
Field EC
Trigger - EC upper
CRD

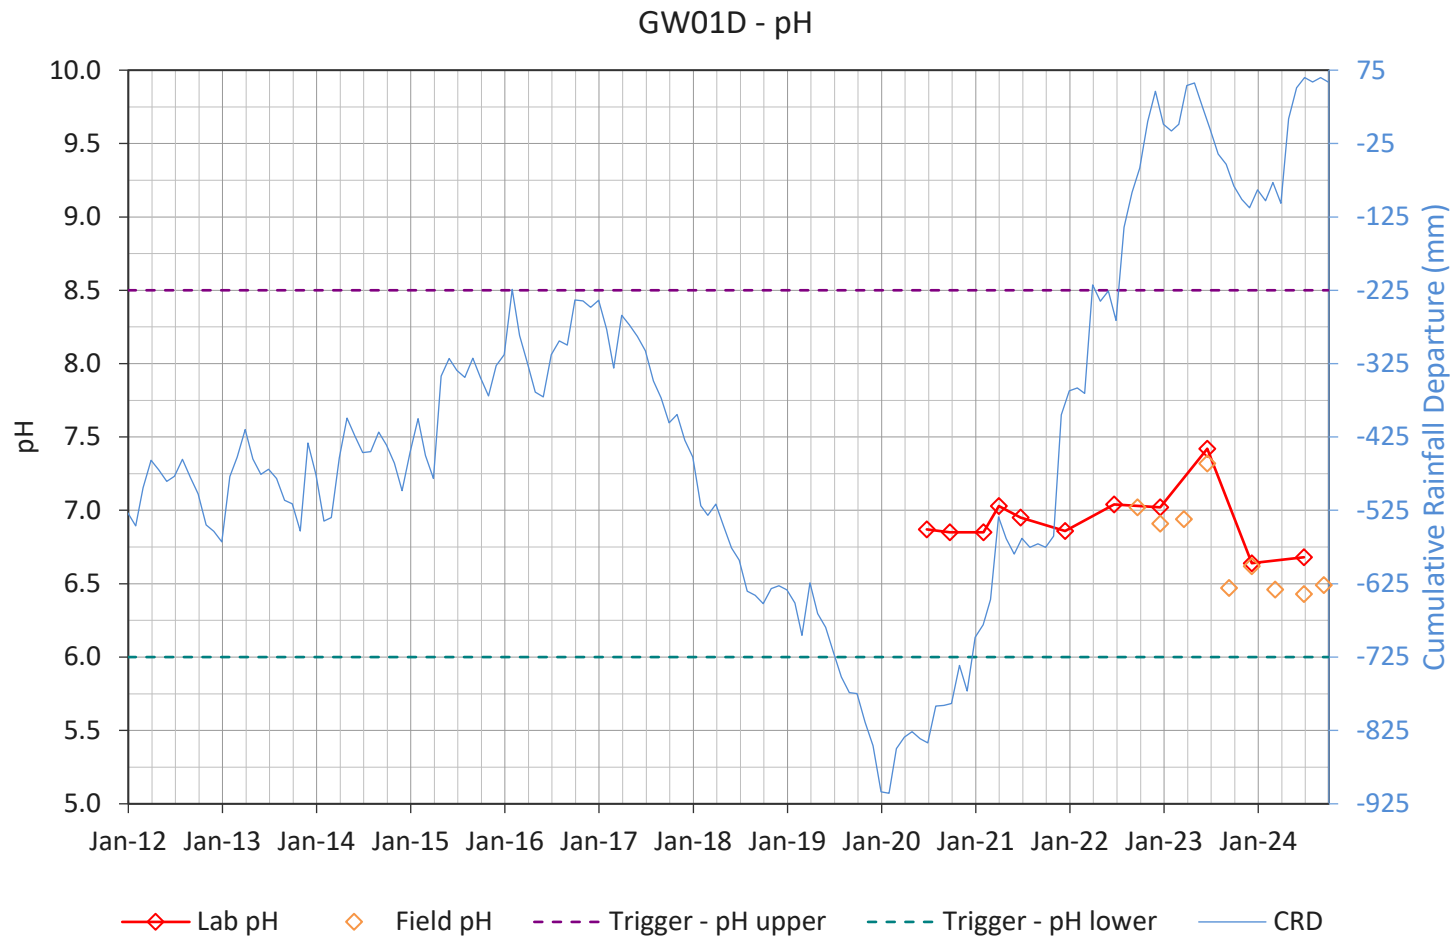
GW01D - pH
pH
Cumulative Rainfall Departure (mm)
10.0
9.5
9.0
8.5
8.0
7.5
7.0
6.5
6.0
5.5
5.0
75
-25
-125
-225
-325
-425
-525
-625
-725
-825
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab pH
Field pH
Trigger - pH upper
Trigger - pH lower
CRD

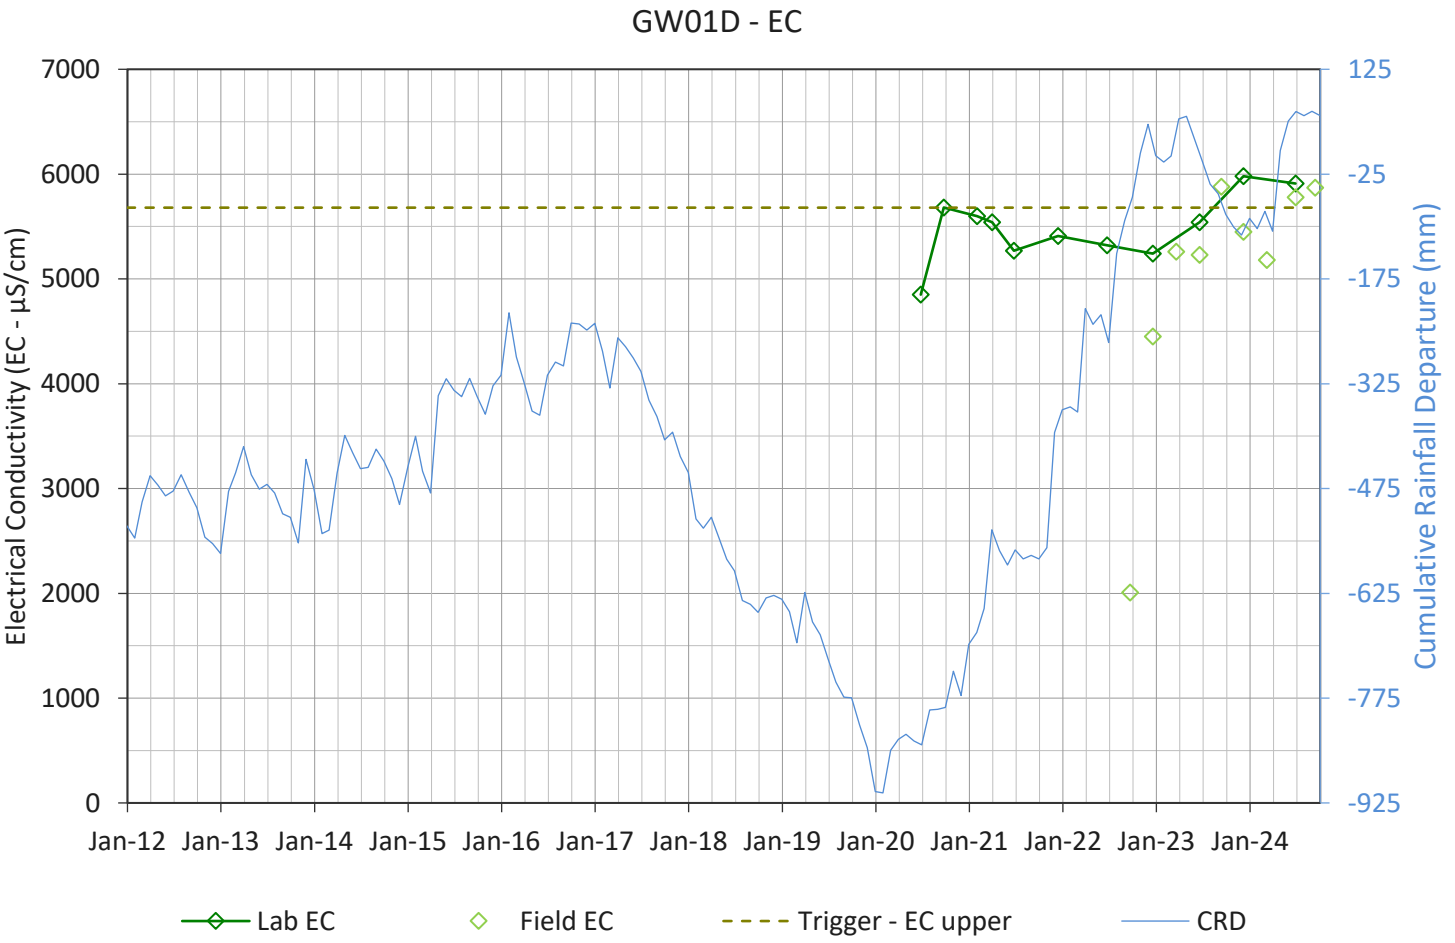
GW01D - EC
Electrical Conductivity (EC - µS/cm)
Cumulative Rainfall Departure (mm)
7000
6000
5000
4000
3000
2000
1000
0
125
-25
-175
-325
-475
-625
-775
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab EC
Field EC
Trigger - EC upper
CRD

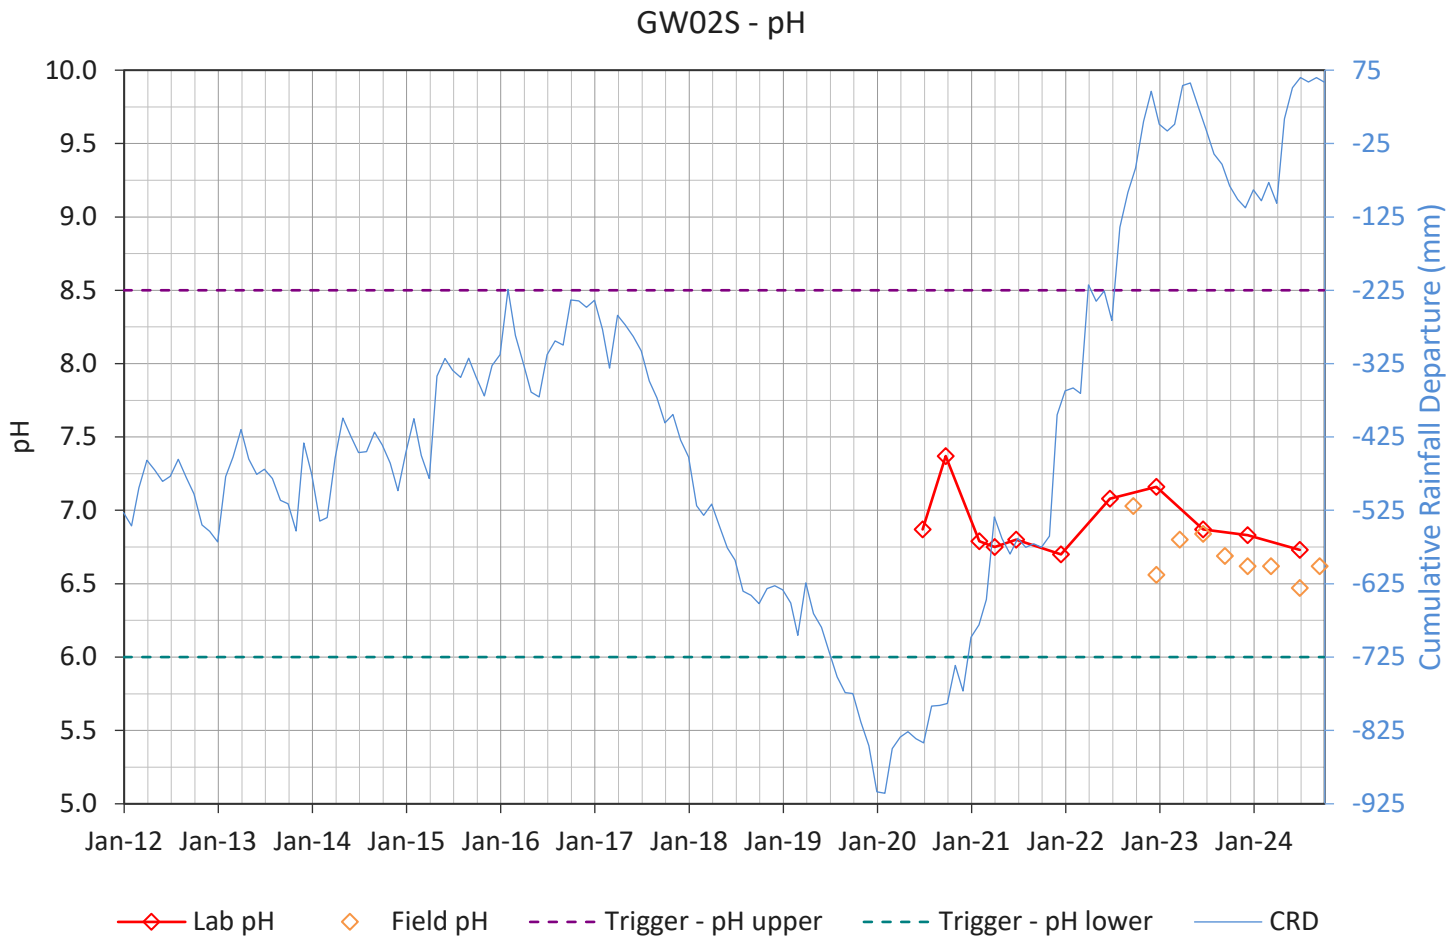
GW02S - pH
pH
Cumulative Rainfall Departure (mm)
10.0
9.5
9.0
8.5
8.0
7.5
7.0
6.5
6.0
5.5
5.0
75
-25
-125
-225
-325
-425
-525
-625
-725
-825
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab pH
Field pH
Trigger - pH upper
Trigger - pH lower
CRD

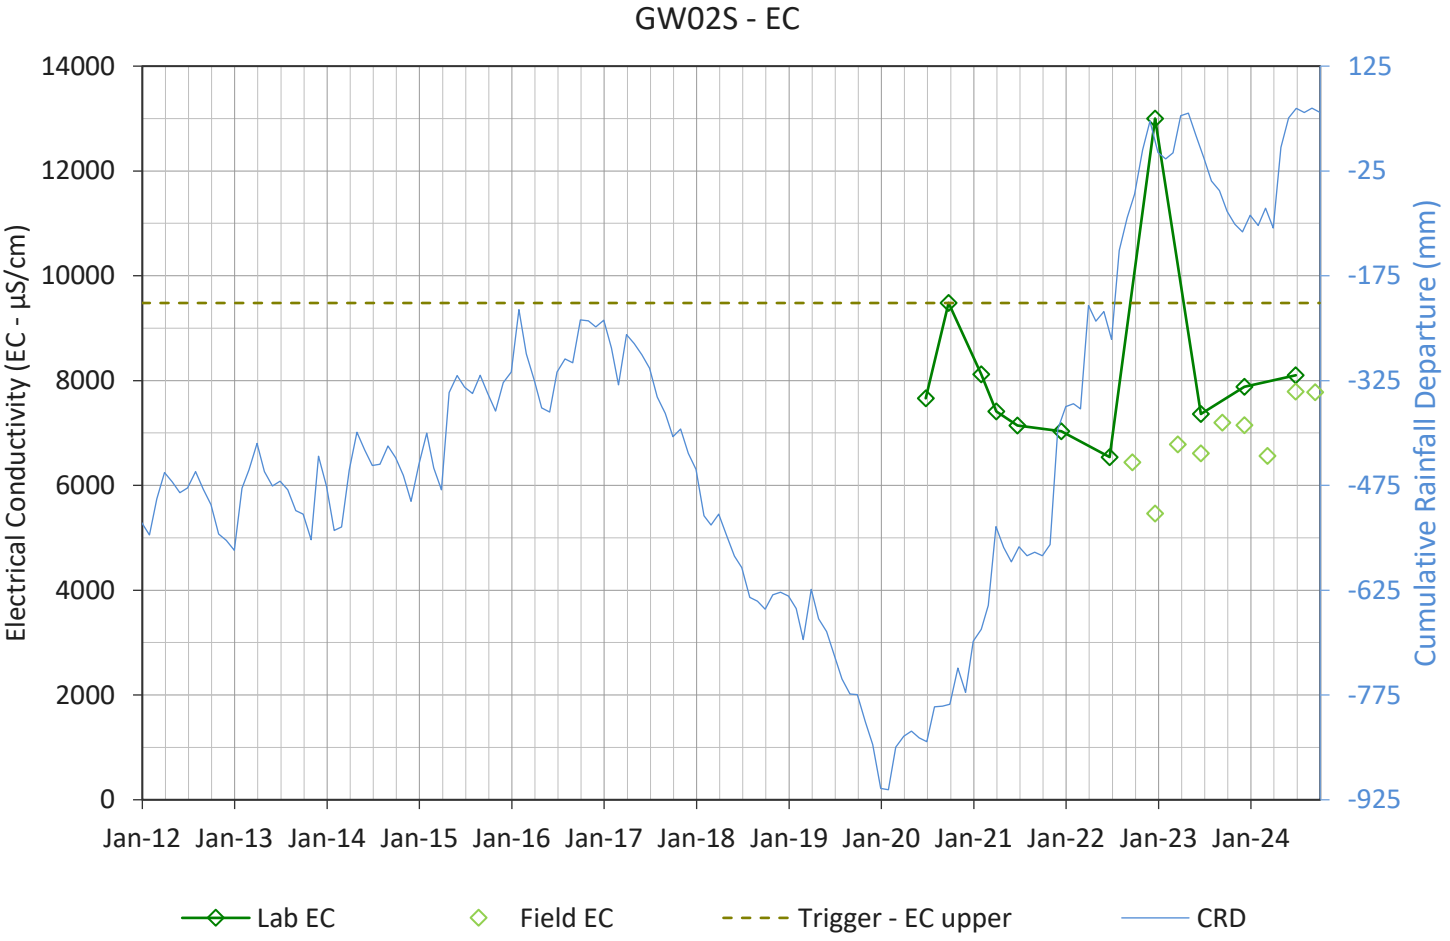
GW02S - EC
Electrical Conductivity (EC - µS/cm)
Cumulative Rainfall Departure (mm)
14000
12000
10000
8000
6000
4000
2000
0
125
-25
-175
-325
-475
-625
-775
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab EC
Field EC
Trigger - EC upper
CRD

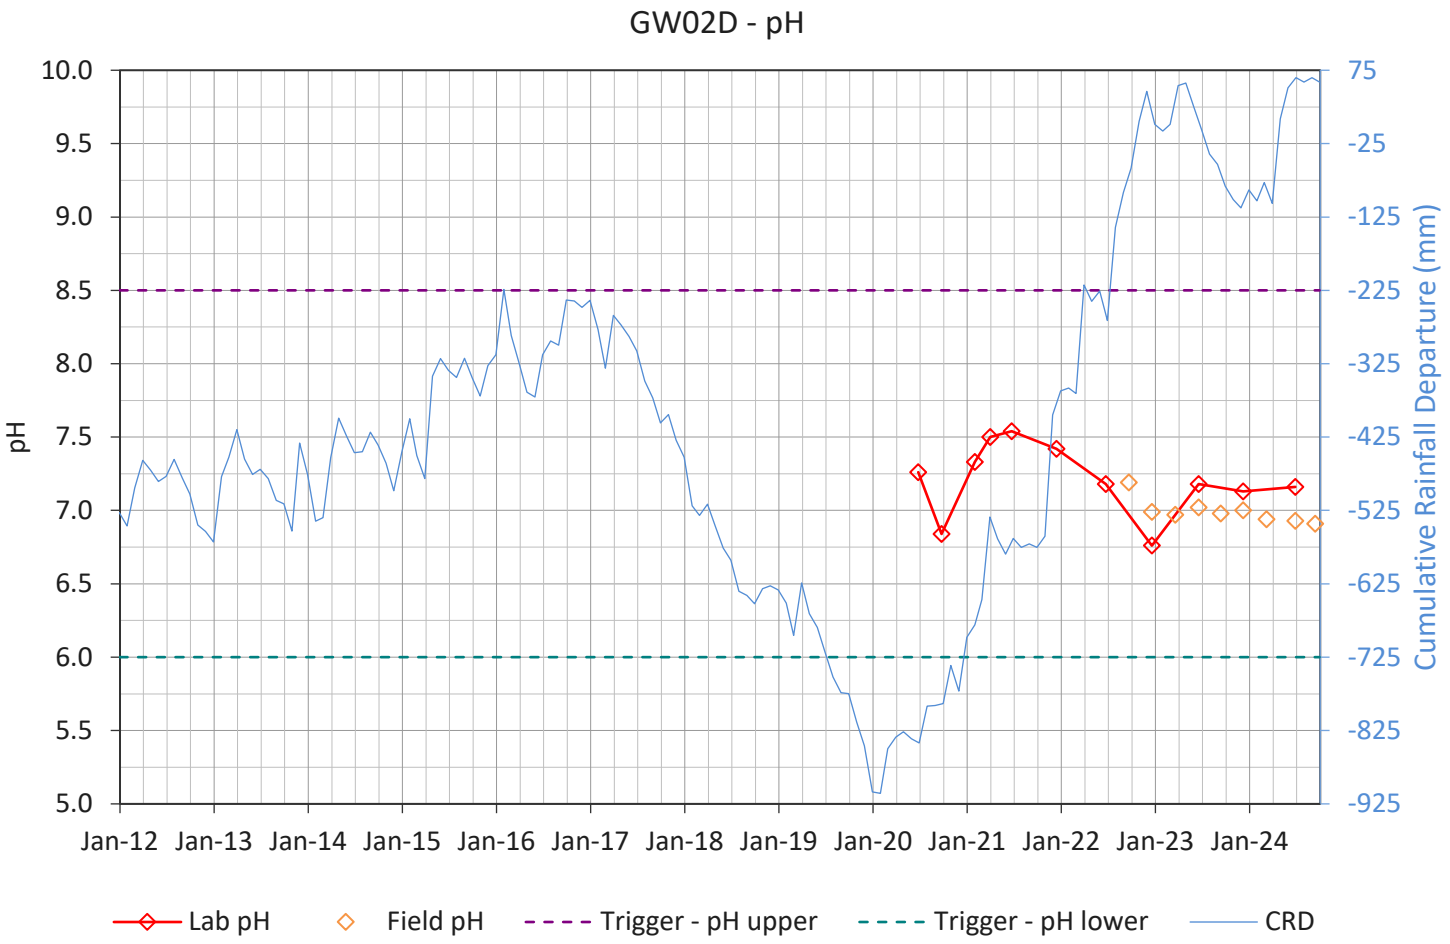
GW02D - pH
pH
Cumulative Rainfall Departure (mm)
10.0
9.5
9.0
8.5
8.0
7.5
7.0
6.5
6.0
5.5
5.0
75
-25
-125
-225
-325
-425
-525
-625
-725
-825
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab pH
Field pH
Trigger - pH upper
Trigger - pH lower
CRD

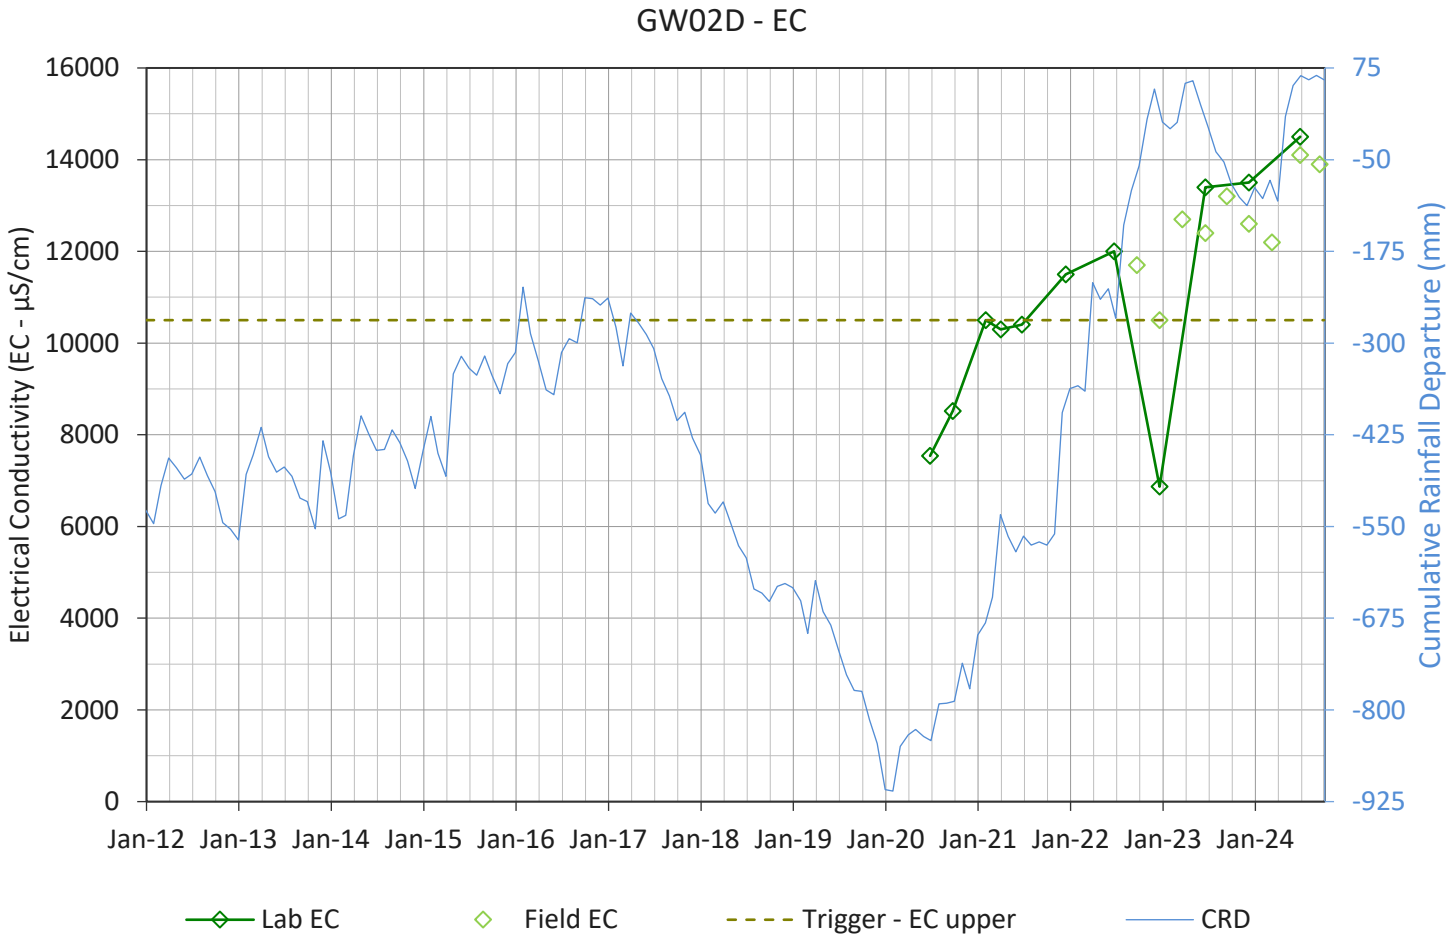
GW02D - EC
Electrical Conductivity (EC - µS/cm)
Cumulative Rainfall Departure (mm)
16000
14000
12000
10000
8000
6000
4000
2000
0
75
-50
-175
-300
-425
-550
-675
-800
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab EC
Field EC
Trigger - EC upper
CRD

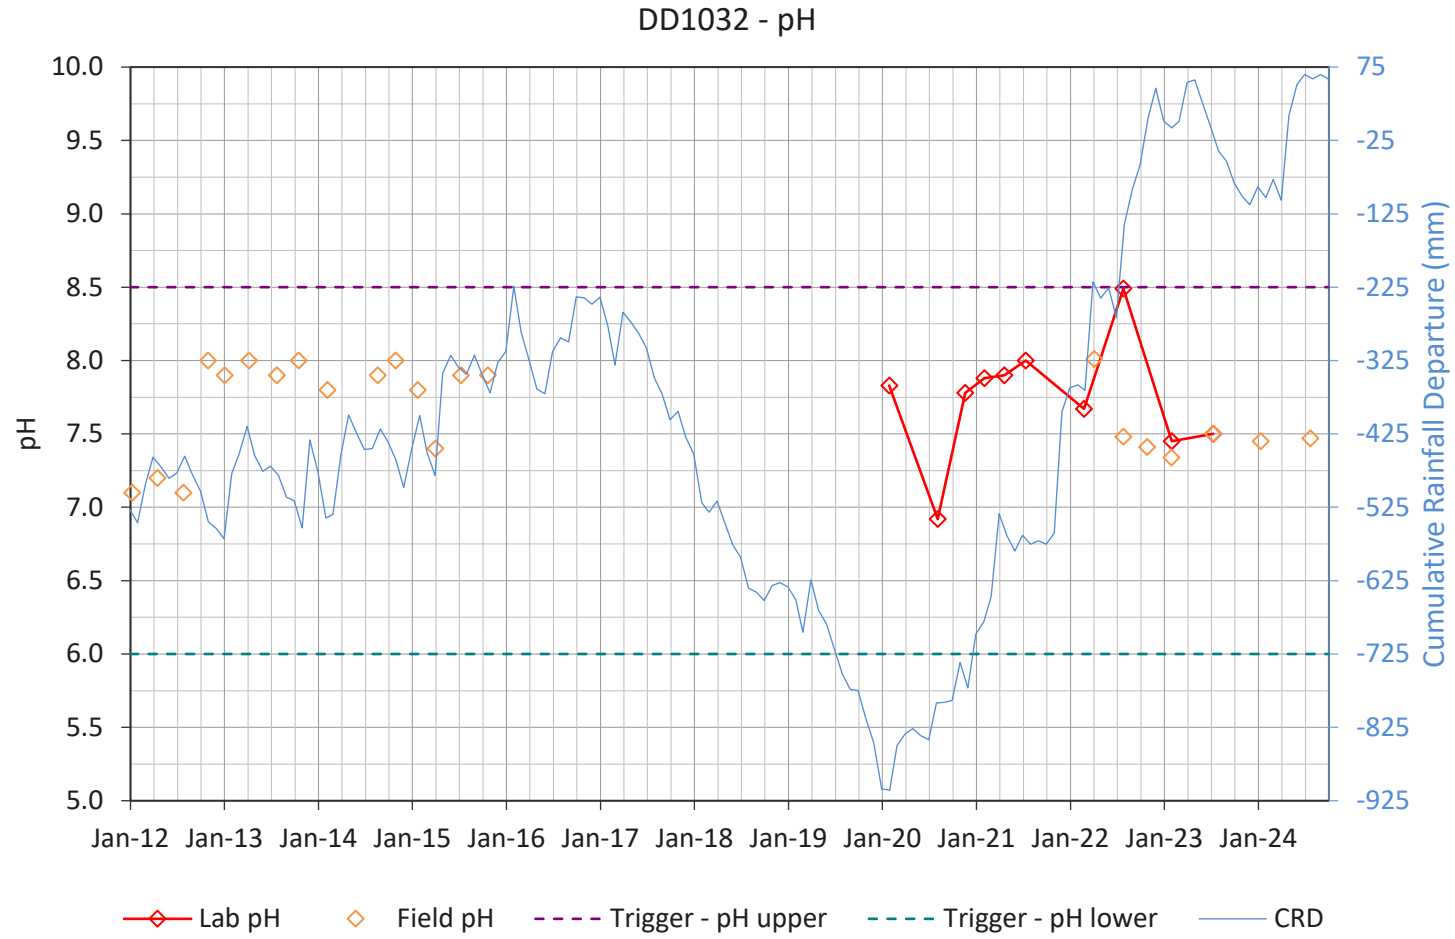
DD1032 - pH
pH
Cumulative Rainfall Departure (mm)
10.0
9.5
9.0
8.5
8.0
7.5
7.0
6.5
6.0
5.5
5.0
75
-25
-125
-225
-325
-425
-525
-625
-725
-825
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab pH
Field pH
Trigger - pH upper
Trigger - pH lower
CRD

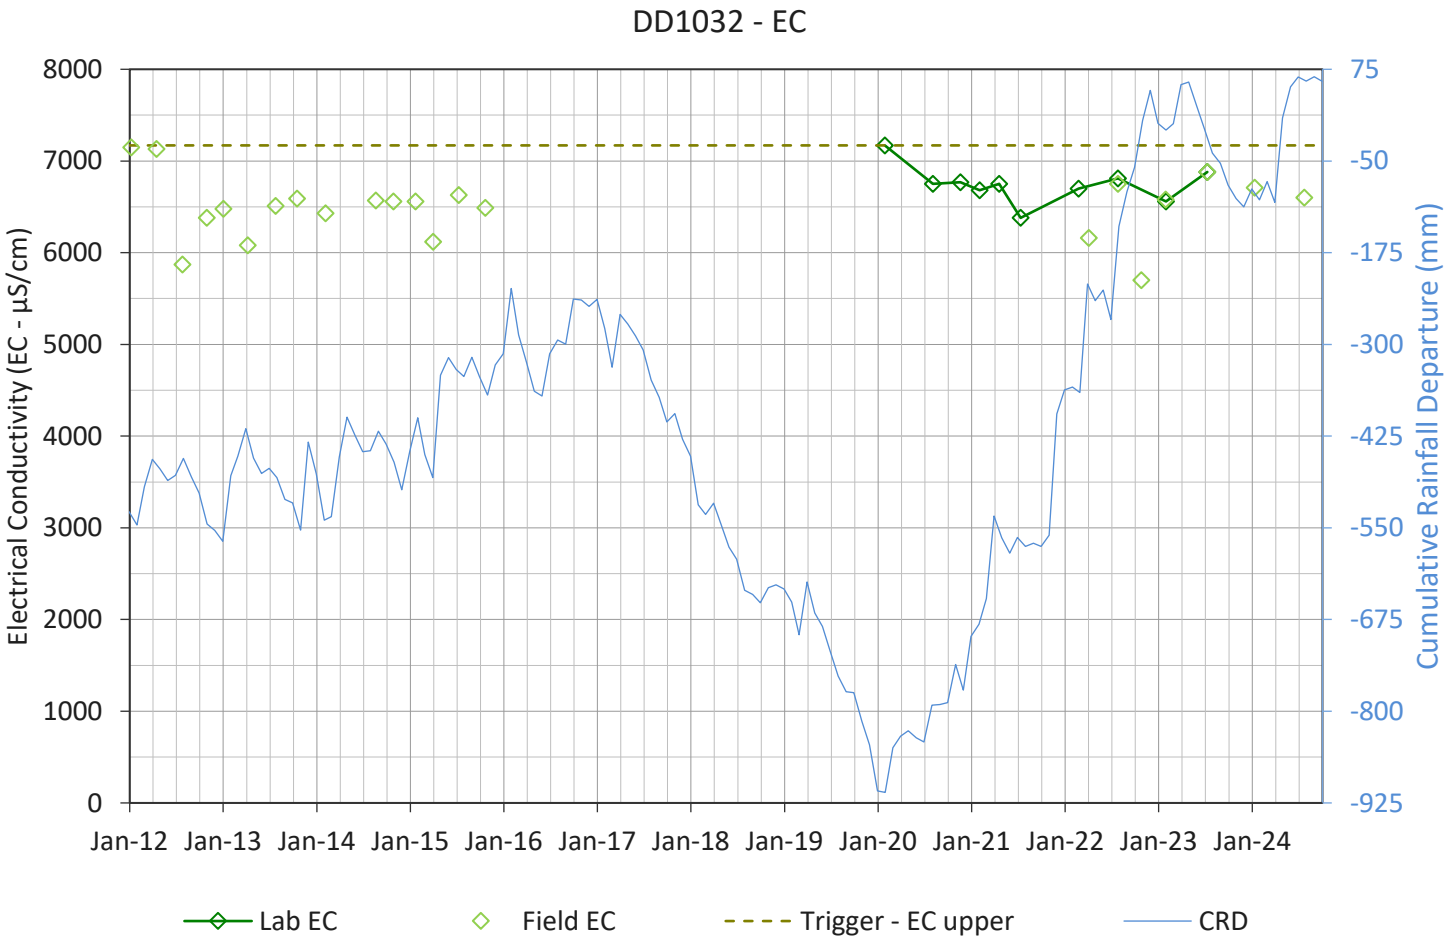
DD1032 - EC
Electrical Conductivity (EC - µS/cm)
Cumulative Rainfall Departure (mm)
8000
7000
6000
5000
4000
3000
2000
1000
0
75
-50
-175
-300
-425
-550
-675
-800
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab EC
Field EC
Trigger - EC upper
CRD

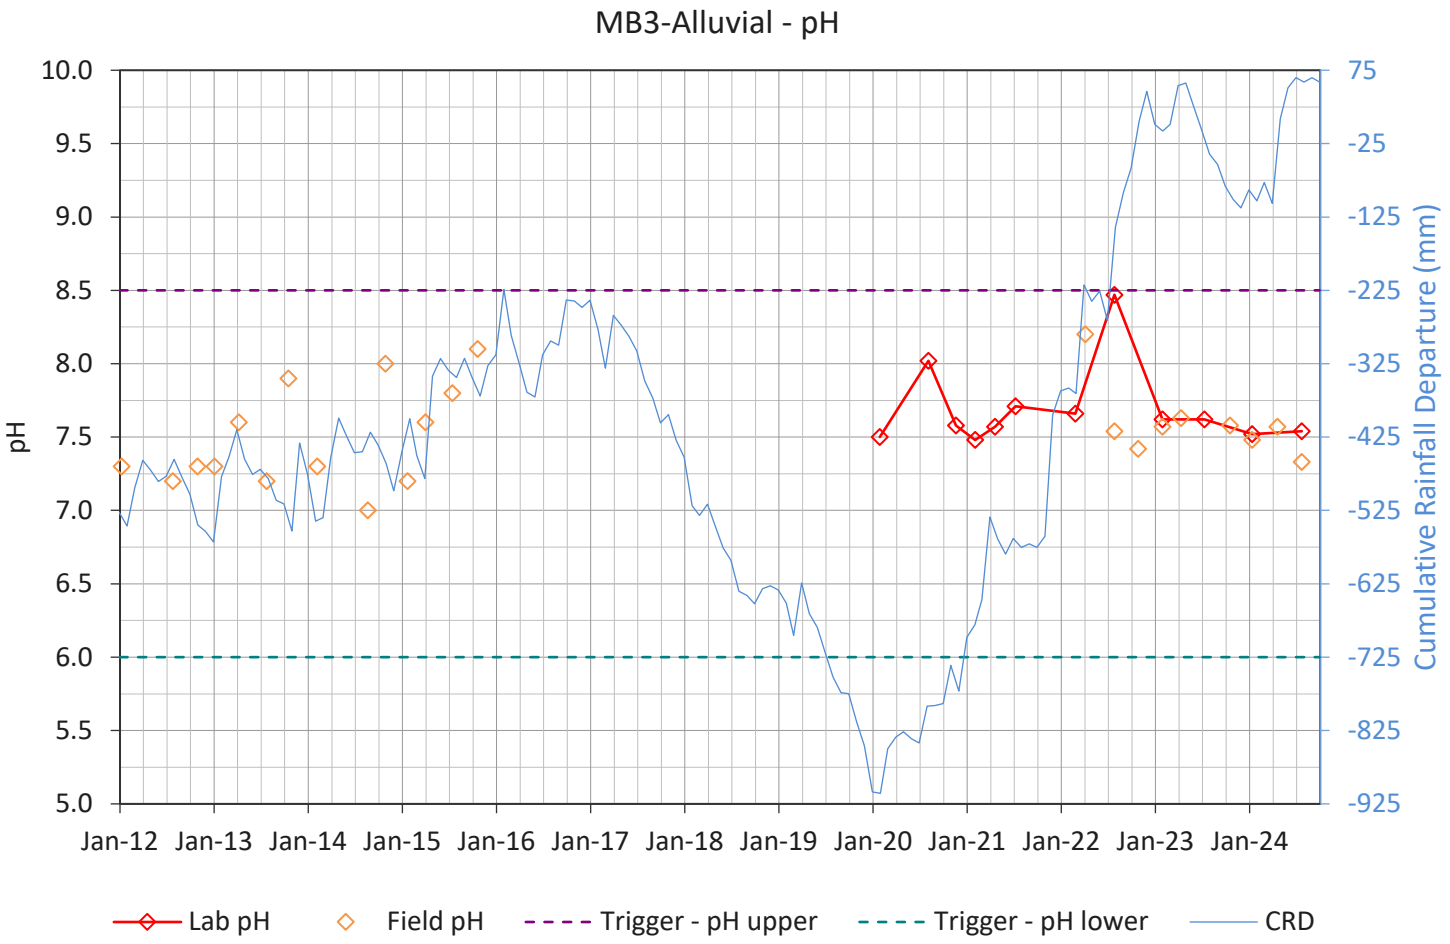
MB3-Alluvial - pH
pH
Cumulative Rainfall Departure (mm)
10.0
9.5
9.0
8.5
8.0
7.5
7.0
6.5
6.0
5.5
5.0
75
-25
-125
-225
-325
-425
-525
-625
-725
-825
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab pH
Field pH
Trigger - pH upper
Trigger - pH lower
CRD

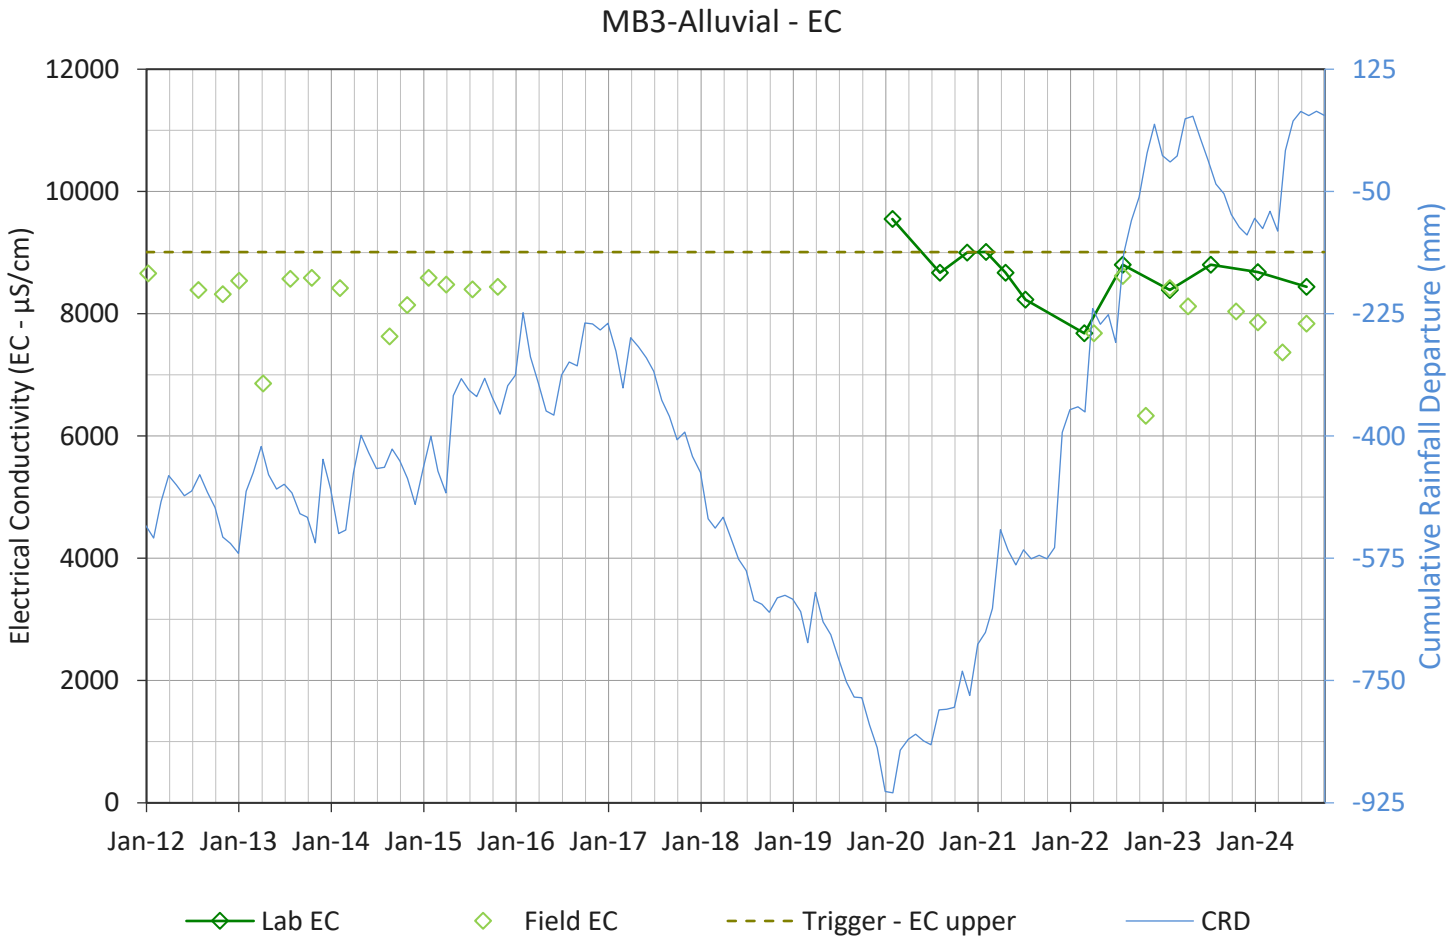
MB3-Alluvial - EC
Electrical Conductivity (EC - µS/cm)
Cumulative Rainfall Departure (mm)
12000
10000
8000
6000
4000
2000
0
125
-50
-225
-400
-575
-750
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab EC
Field EC
Trigger - EC upper
CRD

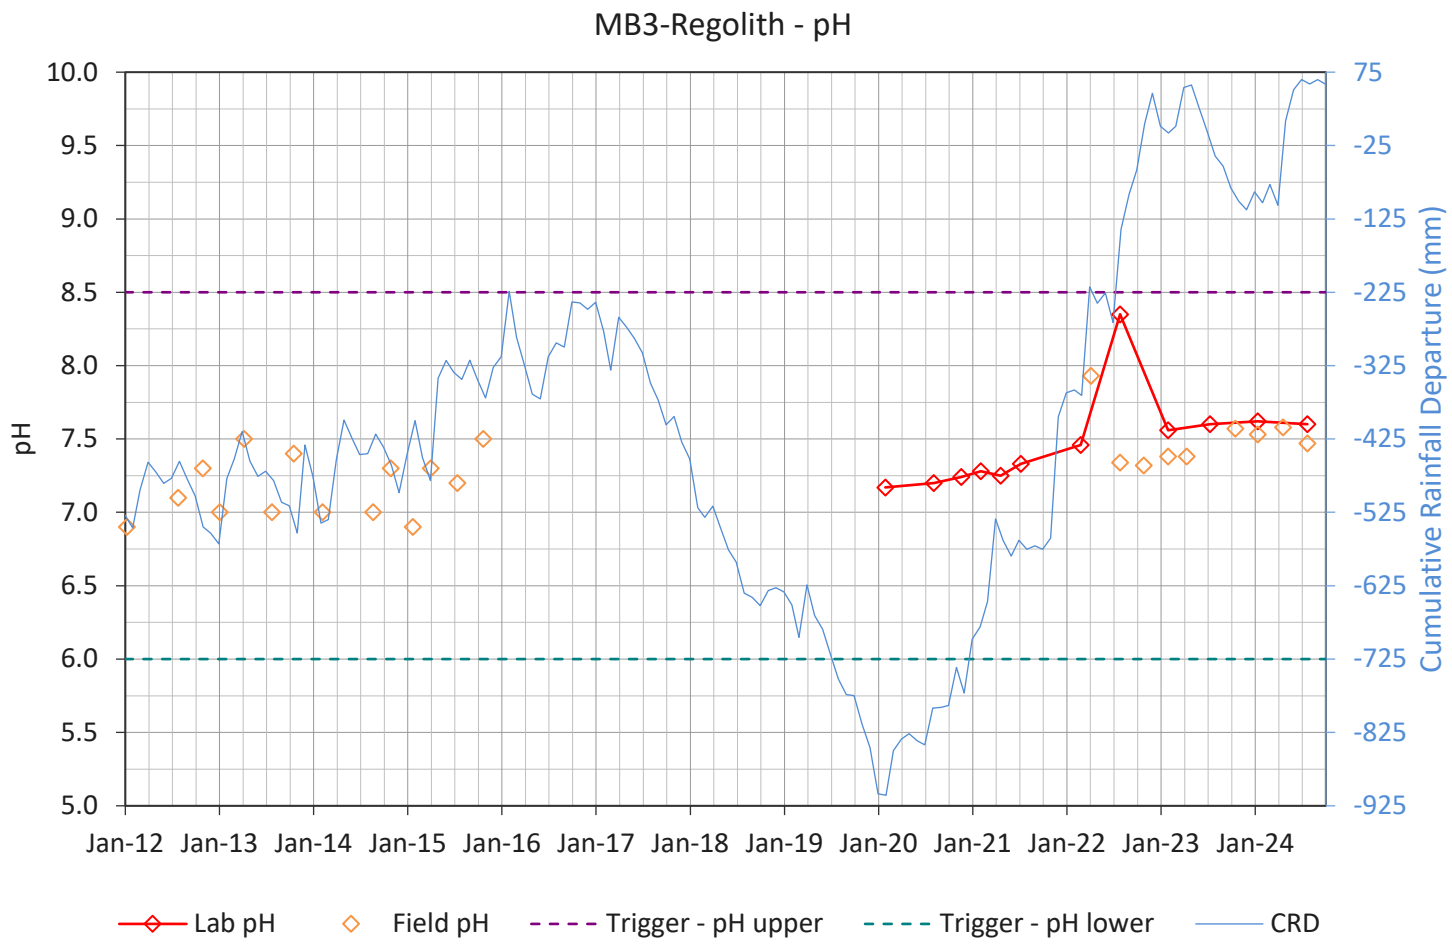
MB3-Regolith - pH
pH
Cumulative Rainfall Departure (mm)
10.0
9.5
9.0
8.5
8.0
7.5
7.0
6.5
6.0
5.5
5.0
75
-25
-125
-225
-325
-425
-525
-625
-725
-825
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab pH
Field pH
Trigger - pH upper
Trigger - pH lower
CRD

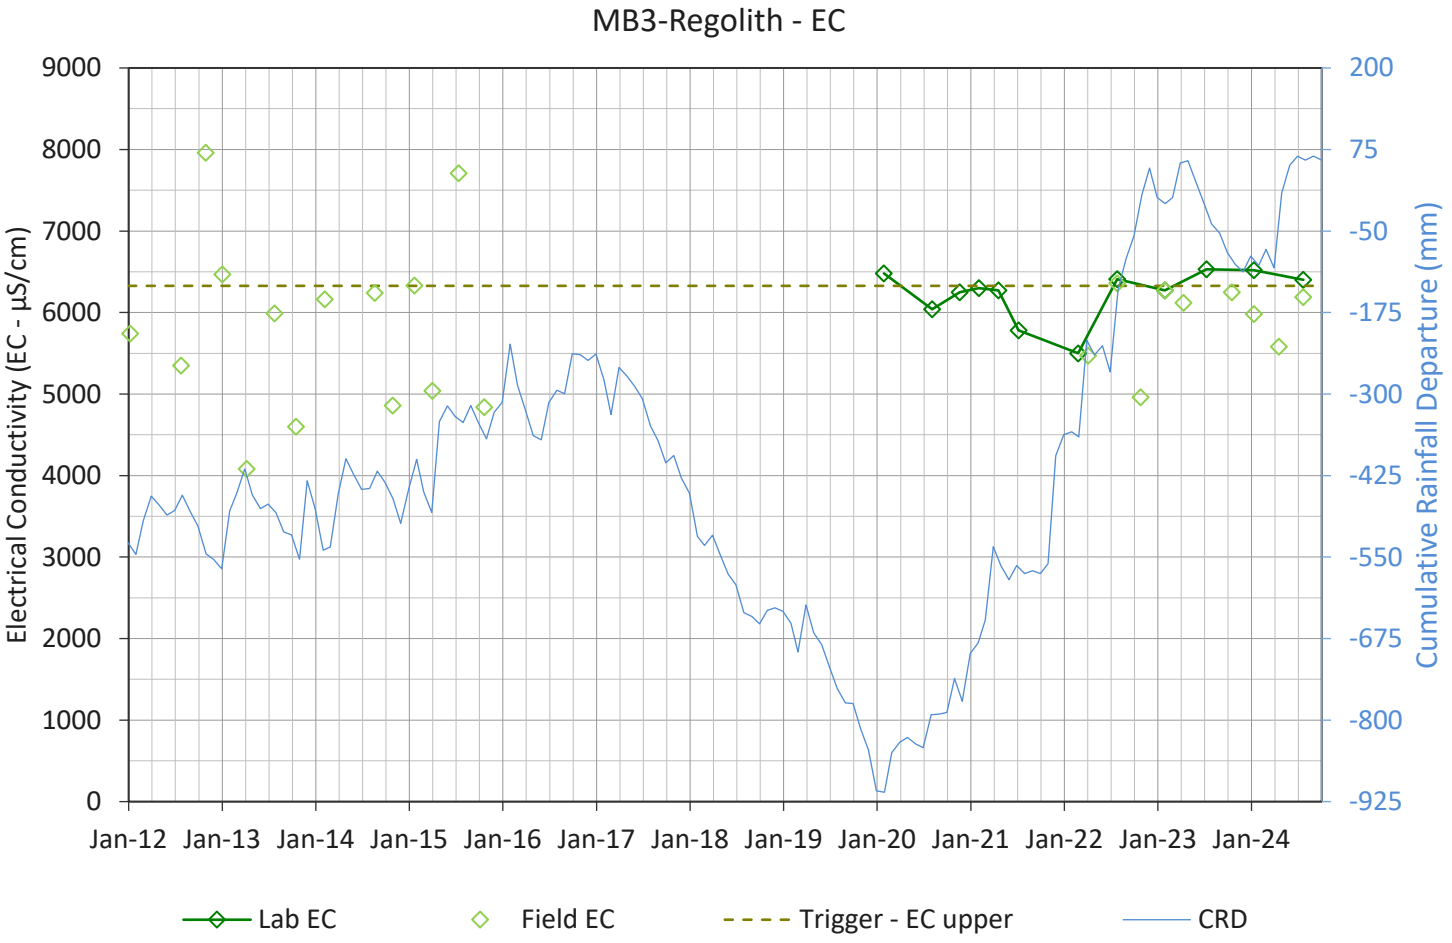
MB3-Regolith - EC
Electrical Conductivity (EC - µS/cm)
Cumulative Rainfall Departure (mm)
9000
8000
7000
6000
5000
4000
3000
2000
1000
0
200
75
-50
-175
-300
-425
-550
-675
-800
-925
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Jan-20
Jan-21
Jan-22
Jan-23
Jan-24
Lab EC
Field EC
Trigger - EC upper
CRD

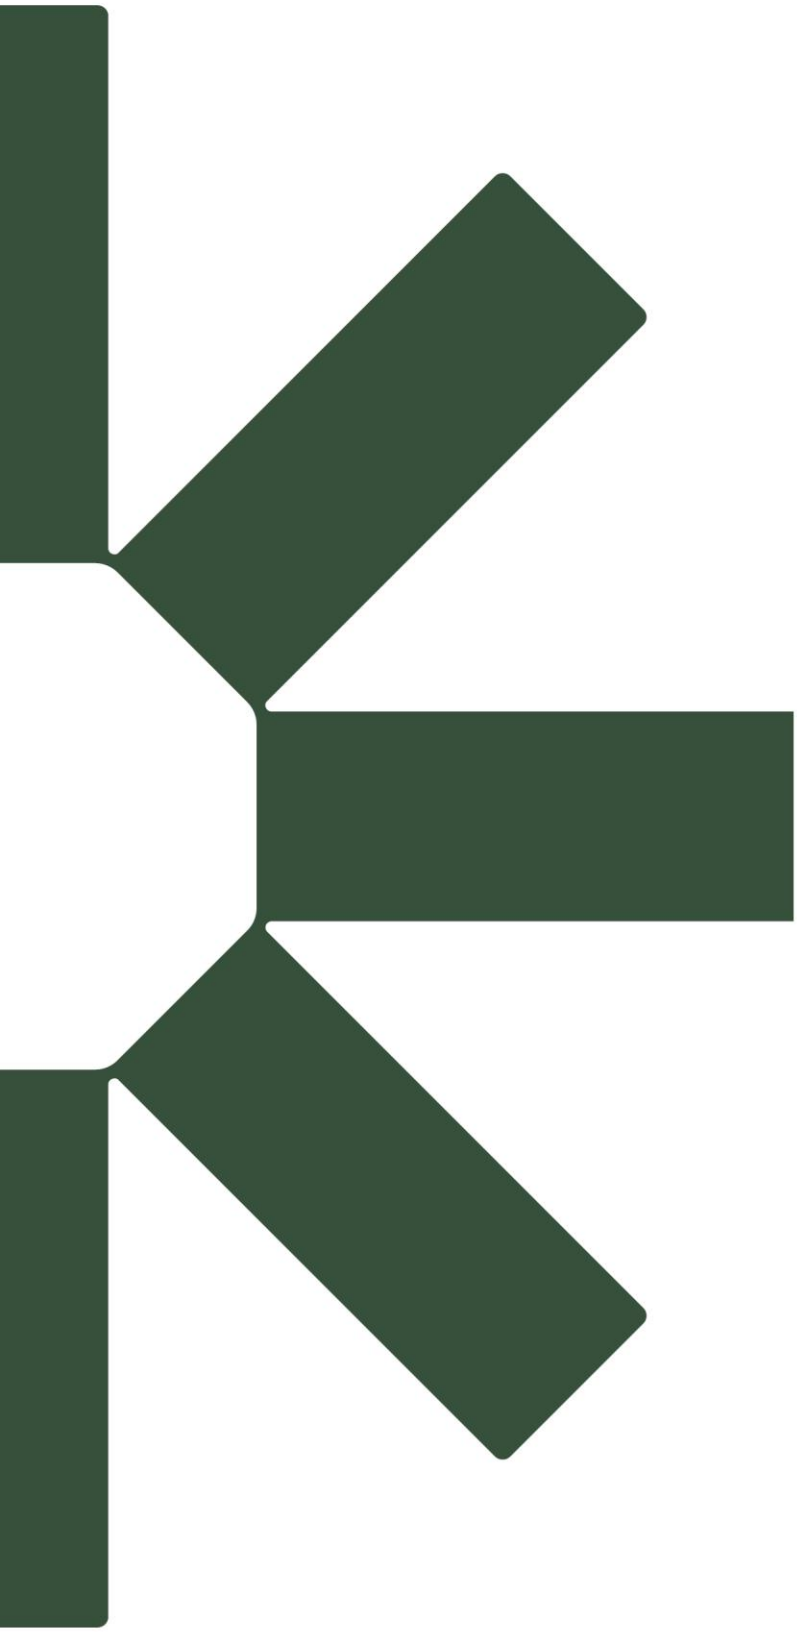

Making Sustainability Happen